

Synchrotron based X-ray radiography of convergent shock waves driven by underwater electrical explosion of a cylindrical wire array

D. Yanuka¹, S. Theocharous¹, S. Efimov², S. N. Bland¹, A. Rososhek², Ya. E. Krasik², M. P. Olbinado³, and A. Rack³

¹*Plasma Physics Group, Imperial College London, London SW7 2BW, United Kingdom*

²*Physics Department, Technion - Israel Institute of Technology, Haifa 32000, Israel*

³*European Synchrotron Radiation Facility, CS40220, 38043 Grenoble Cedex 9, France*

We present x-ray radiography images showing the propagation of shock waves generated by electrical explosion of a cylindrical arrangement of wires in water driven by pulsed power. In previous experiments [S. N. Bland et al., Phys. Plasmas **24**, 082702 (2017)] the merger of shock waves from adjacent wires has produced a highly symmetrical, cylindrical shock wave converging on the axis, where it is expected to produce a high density, strongly coupled plasma ideal for warm dense matter research. However, diagnostic limitations have meant that much of the dynamics of the system have been inferred from the position of the front of the cylindrical shock and timing/spectra of light emitted from the axis. Here we present synchrotron-based radiography of such experiments – providing direct quantitative measurements on the formation of the convergent shock wave, the increased density of water on axis caused by its arrival, and its ‘bounce’ after arrival on axis. The obtained images are compared with two-dimensional hydrodynamic simulations which reproduce the observed dynamics with a satisfactory agreement in density values.

I. Introduction

There has been a growing interest in converging cylindrical shock waves since the early 1940s due to the high densities and energy densities that can be obtained in the vicinity of convergence [1]. Achieving these high energy density states is important in multiple areas of research – for instance it enables the equation of state (EOS) of highly coupled plasmas to be developed, which underpins the formation of exoplanets and stars whilst directly affecting inertial confinement fusion experiments in laboratory conditions [2, 3]. Previous methods of generating converging cylindrical shock waves included using chemical explosives packed around a cylinder; having a dynamic z-pinch strike a cylinder on axis; and directly or indirectly utilising radiation from high energy laser systems [4-6]. In the last decade, though, much research has been carried out on a relatively new method – using underwater electrical explosions of cylindrical wire arrays to directly generate such shock waves [7-13]. This method had proven to be both easily controllable and highly efficient theoretically enabling small pulsed power drivers to reach multi-Mbar pressures – without requiring the special safety measures necessary in the case of high explosives.

The underwater electrical explosion of wires is characterized by the rapid expansion of the wires as they undergo phase transitions from solid to plasma, which results in the generation of shock waves in the surrounding water. The shock waves from each individual wire in the cylindrical array merge to create a single cylindrical converging shock wave, which generates high energy density conditions in the vicinity of the implosion axis. However, until now, laser shadowgraphy has been the principle diagnostic used to study such experiments – with a powerful CW laser passing axially through the array which is then recorded via a high-speed framing camera or a streak camera. In practise, shadowgraphy can only image the front of the merged shock wave – image contrast is strongly degraded behind the shock front due to induced turbulence which scatters the laser light. Further limitations in optics and alignment have meant

the shock wave cannot be followed all the way to the axis - for instance, in a recent study at Imperial College London, the shock wave dynamics could only be followed from the diameter of the array (10 mm) until $\sim 100 \mu\text{m}$ diameter. The stability of the shock wave, which becomes radiative in the vicinity of implosion, and its velocity then enabled calculations of the pressures closer to the axis – with over 1 Mbar being obtained under $20 \mu\text{m}$ diameter [14]. A direct measure of the density on axis of such experiments would lend much support to previous experiments and the hydrodynamic calculations used to then infer pressure on/close to axis, and the potential use of underwater arrays to drive high pressures in other materials placed on axis.

In this paper we present x-ray radiography images of underwater electrical explosions of cylindrical wire arrays, obtained at the European Synchrotron Radiation Facility (ESRF). These images, taken in the phase contrast regime, allow us to see both the merged shock wave produced in the experiments and through the material behind this shock. This allows us to study how the shock wave s from the individual wires merge together, and the conditions created on axis at the arrival of the convergent shock. The images also allow us to see the reflection of this shock wave after it reaches the axis as it propagates back to the wire array. Moreover, as well as shock velocities, the water density can be directly measured from the radiographs and compared to a two-dimensional (2D) Hydrodynamic (HD) simulation coupled with EOS of water, which can also provide pressure, temperature, and energy density values.

II. Experimental setup

The experiments were carried out at the ID19 beamline at ESRF which is located at 150 m from the undulators. The long distance between source and experiment allows one to use partially coherent X-rays for the imaging experiment. The X-ray beam energy spectrum was polychromatic ranging from $\sim 20 \text{ keV}$ to $\sim 50 \text{ keV}$ with a mean energy of $\sim 30 \text{ keV}$. The photon flux was of $2 \times 10^7 \text{ photons/mm}^2$ before the experimental chamber, with a pulse duration of 100

ps and 176 ns separation between pulses. After the sample, the beam was propagated another 10 m to obtain a propagation-based phase-contrast regime, where diffraction effects increase the contrast of interfaces, i.e. between different material phases where a sudden change of the refractive index occurs. The beam then hits a LYSO:Ce scintillator imaged via a 45 degree mirror to a Shimadzu HPV-X2 camera with a detector pixel size of 32 μm , which allows capturing an image from every third pulse. A more detailed description of the experimental setup of ID19 is available in Refs. [15, 16] and the current experimental setup in [17].

The pulsed power generator consisted of 4 parallel low-inductance, High-Voltage (HV) Maxwell capacitors of 220 nF each, charged to 32 kV and discharged by a spark gas switch. The cylindrical arrays of 5 mm diameter were constructed using 20 copper wires of 30 mm in length and 63 μm in diameter, chosen to critically damp current and maximise energy transfer rate to the wires. The wires were stretched and soldered between two electrodes screwed in an acrylic tube filled with deionised water. This setup was then placed axially, along the x-ray beam, in an aluminium chamber, which provided the current return path and acted to contain any water spilled/debris produced during an experiment. 10 mm diameter windows covered by thin mylar sheets enabled the X-rays to pass through. The discharge current was measured by a Rogowski coil at the output of the generator, and the voltage was measured using a Tektronix HV voltage divider. A sketch of the experimental setup is presented in Fig. 1.

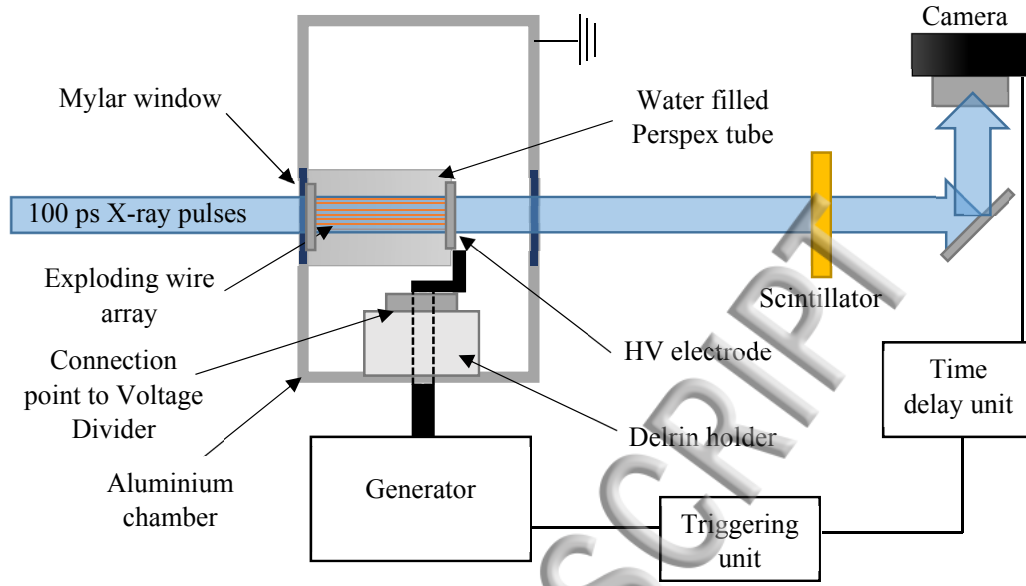


Fig. 1. Experimental setup.

III. Experimental results

Prior to driving exploding wires, the total inductance of the driver and load was found by replacing the wires with a thick (non-exploding) copper cylinder of the same length and radius. Treating the resistance of the load then as constant, the period and decay rate of the current pulse in this simple series RLC circuit suggested the overall inductance was ~ 450 nH. Comparing the voltage measured across the wire array to $V(t) = I(t)R(t) + LdI(t)/dt$, allowed the inductance of the array and its connection to be estimated as ~ 50 nH. A theoretical calculation of only the wire array suggests $L \sim 25$ nH, with the rest of the inductance of ~ 25 nH being due to connections to the driver and grounded electrode.

The current through and voltage across the array and its connections (corrected for the effects of $LdI(t)/dt$) are shown in Fig. 2. The peak current is ~ 36 kA at ~ 0.93 μ s, and afterwards appears to be slightly underdamped. A simple series circuit with the same inductance and resistance would require a total resistance of ~ 1.43 Ω for critical damping if the resistance remained constant. In the exploding wire load, however, the resistance varies greatly as the

wires are heated and exploded, resulting in the distinct, relatively fast rising voltage pulse and rapid fall in current after peak.

Calculations of the power into the array and total energy deposited into it are also shown in Fig. 2. These suggest that by $\sim 2 \mu\text{s}$, as the discharge current becomes negligible small, a total of $\sim 420 \text{ J}$ has been deposited into the wires. This value of deposited energy is slightly lower than the $\sim 450 \text{ J}$ initially stored in the capacitors, suggesting some small losses occurring in the spark gap and water surrounding the wire.

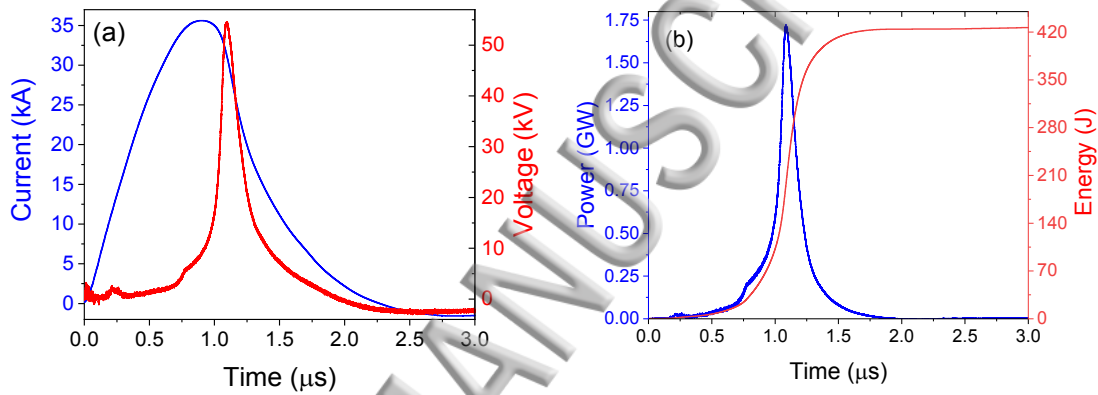


Fig. 2. Current, resistive voltage, power, and energy waveforms.


The radiography images obtained are presented in Fig. 3. The times stamps are with respect to the beginning of the discharge current (see Fig. 2a). A noticeable expansion of the wires is seen in Fig. 3c, where the current is slightly after its peak. At this stage the wire undergoes a transition to the liquid/weakly-ionized gas state where the resistivity rises rapidly followed by the rise in voltage. Then, around the voltage peak of $\sim 55 \text{ kV}$, when the resistance of the wire array reaches $\sim 1.76 \Omega$, continuing gas ionization leads to a decrease in resistivity and, consequently, to the voltage decreases as well. During the fall of the discharge current, one obtains the main energy deposition into the wires leading to their fast radial expansion and to the launch of a shock wave from each wire.

In the next frame (Fig. 3d) a single shock wave is formed as a result of the merged shock waves from the individual wires. Despite the fact the individual wires do not all expand

at the same rate, the self-repairing nature of the shock front in water [13] means that the merged shock wave appears remarkably smooth with no sign of imprint from the wires. The averaged density behind the merged shock was calculated using the x-ray attenuation equation $I = I_0 \exp[-\kappa L \rho]$, where κ is the x-ray mass attenuation coefficient taken from the NIST database for the average ray energy of 30 kV [18], L is the length of the tube filled with water, ρ is the density of water, and I_0 is the initial ray intensity. This suggests the water behind the front is $\sim 1.25 \text{ g/cm}^3$ on average and modulated by the reflecting shocks from the individual wires – with a high of $\sim 1.4 \text{ g/cm}^3$ and a low of $\sim 1.15 \text{ g/cm}^3$.

The average velocity of the shock wave between frames shown in Figs. 3d-3e is $\sim 3170 \text{ m/s}$ (compared to a speed of sound in water of $\sim 1480 \text{ m/s}$). Considering this velocity to be constant, the shock wave should reach the axis at $t = 1.87 \mu\text{s}$, thus in Fig. 3e ($t = 1.96 \mu\text{s}$) the shock wave has just reflected from the axis, i.e., it has ‘bounced’ (in practise the shock usually accelerates close to the axis hence this velocity is – if anything – an underestimate and so this shock wave must have been reflected by this point in time). Immediately behind the reflected shock in Fig. 3e the average density on/close to axis is 1.43 g/cm^3 . Between Figs. 3e-3f, the average velocity of the reflected shock is $\sim 3050 \text{ m/s}$. As the reflected shock heads back towards the original array diameter (Fig. 3g) the density behind the shock front reduced to $\sim 1.16 \text{ g/cm}^3$.

In Fig. 3d one can see a region behind the shock characterizing by density non-uniformities arising because of reflecting single shock waves generated by two adjacent wires. In Fig. 3g these non-uniformities remain and are squeezed to form straight lines of higher density until they disappear in Fig. 3h. To decrease, these non-uniformities we are planning to use in next experiments arrays with larger number of wires having smaller diameters.

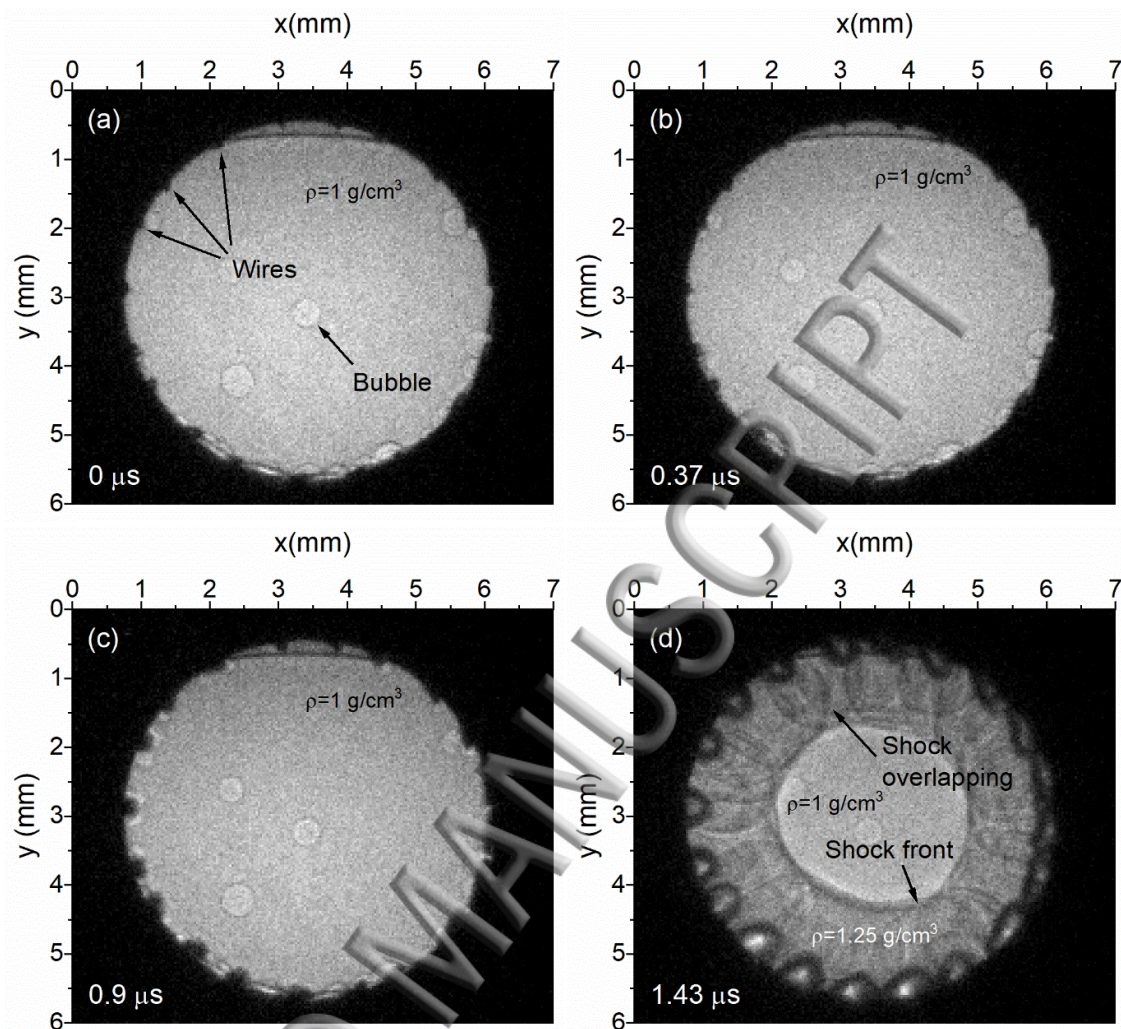

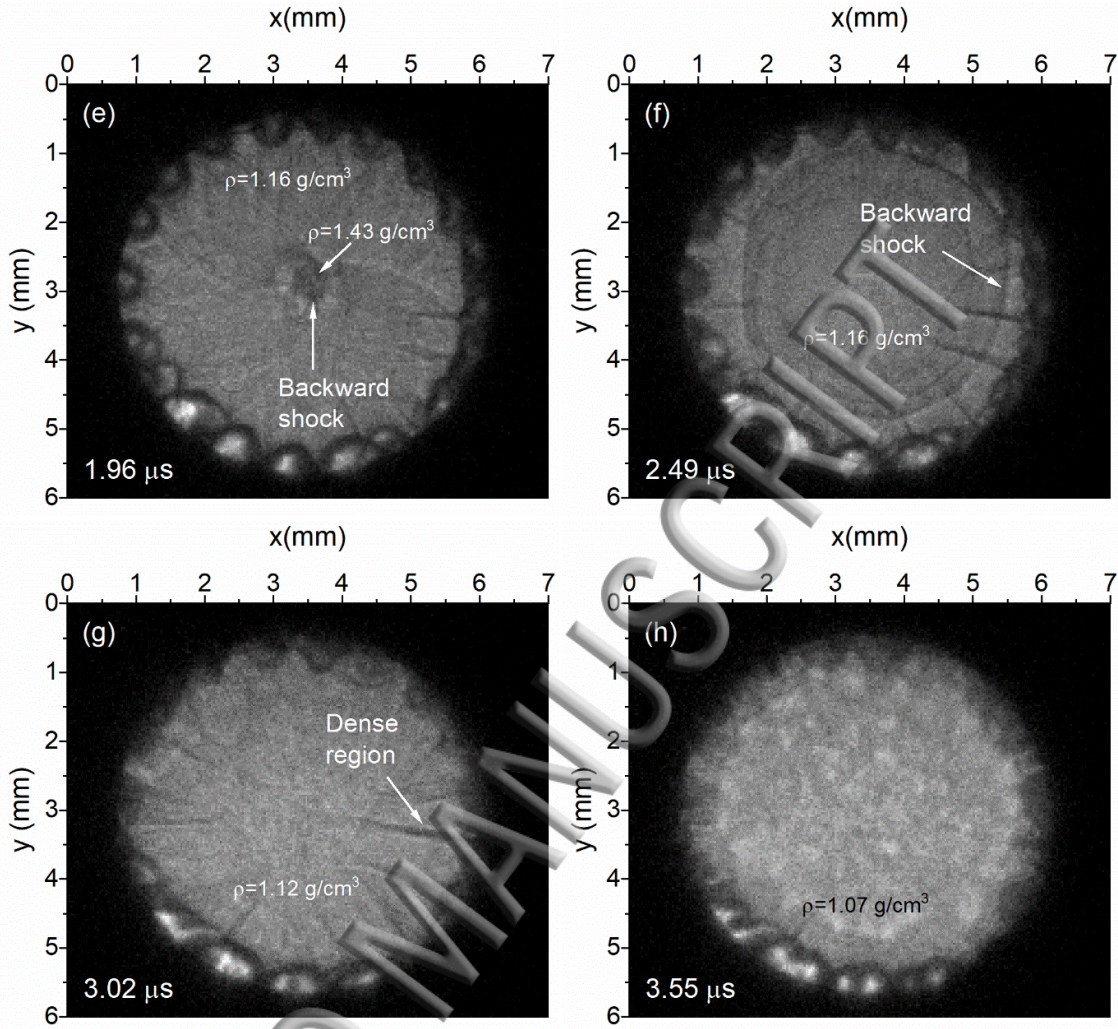


Fig. 3. Radiography images of underwater electrical exploding cylindrical array. (Density values are averaged across (a)-(c) water region, (d) non-disturbed water region, and behind the shock front, (e) small circle in the middle and rest of the region, (f) region behind shock propagating back to wires, (g) water region, (h) water region.)

IV. Hydrodynamic Simulation

Two-dimensional HD simulations were run in attempt to reproduce the features seen in the experiments. These simulations, using a code developed to match previous shadowgraphy data ([19]), could now be far better constrained with the density measurements and dynamics of the material behind the shock front. The simulations could also provide information about temperature, energy density, and pressure behind the shock front. The code employed a Lagrangian mesh and considered mass, momentum, and energy conservation equations. These

equations were coupled with water and copper EOSs [20]. The input to the simulation was the power calculated from the measured current and resistive voltage in the experiment. Similar to previous studies (for example Ref. [14]), only 80% of the deposited power was taken in the hydrodynamic simulation due to possible small losses of current through the surface of the wire and radiation, which do not contribute to the wire's expansion.. Generally, in each time step the power was input to the wires in the simulation and the conservation equations coupled with the EOSs were used to calculate the new pressure, temperature, and density, and the pressure gradient created caused the nodes in the Lagrangian mesh to move. A more detailed description of the algorithm used in the simulation is presented in Ref. [21]. Only a quarter of a cylinder was used in order to reduce the running time of the simulation. The boundary condition at $x = 0$ and $y = 0$ is the velocity perpendicular to the boundary $v_{\perp} = 0$.

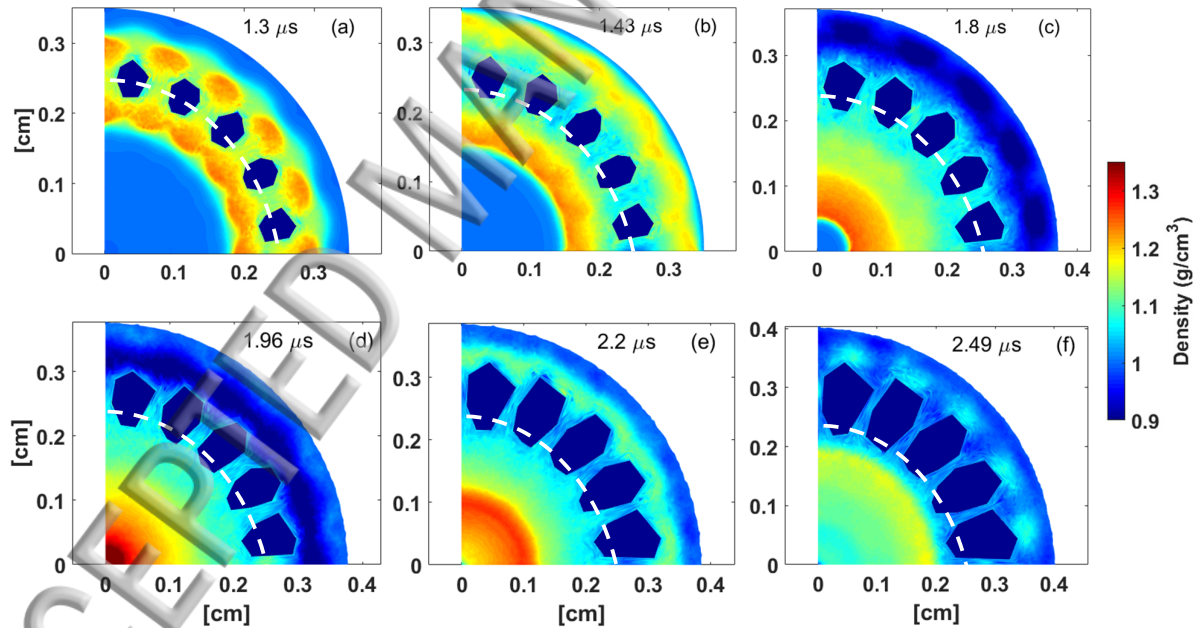


Fig. 4. Hydrodynamic simulation snapshots of density. The white dashed line represents the visible area in the experimental images.

Six snapshots from the simulation, out of which three at times as in to Fig. 3 are presented in Fig. 4. In Fig. 4a one can see the beginning of the process of individual shocks merging to one converging shock wave. The shock keeps converging in Figs. 4b and 4c, and is

then reflected back towards the wires in Figs. 4d-f. The density behind the shock front in Fig. 4b is $\sim 1.22 \text{ g/cm}^3$ compared to the experimental 1.25 g/cm^3 . The density near the origin in Fig. 4d is $\sim 1.34 \text{ g/cm}^3$ compared to the experimental 1.43 g/cm^3 , and the density behind the shock going back to the array in Fig. 4f is $\sim 1.18 \text{ g/cm}^3$ compared to the experimental 1.16 g/cm^3 . Thus, there is a satisfactory agreement in the shock wave's position, as well as the density values between Fig. 3 and Fig. 4 at the respective time delays. The shock reflecting regions pointed out in Fig. 3d are also visible in Fig. 4a with satisfactory agreement. The simulation was not able to reproduce the dense regions shown in Fig. 3g. A reason for this can be that the not completely symmetric nature of the explosion caused this dense region to appear. This feature requires additional research.

V. Summary

Synchrotron-based x-ray radiography images of an underwater electrical explosion of a cylindrical wire array were presented. These images allow to observe the average density of water behind the shock front and after implosion, which was impossible using optical diagnostics. The results were compared to a 2D HD simulation with satisfactory agreement both in the position of the shock wave generated and in the density values in the different regions. This supports the application of the code in estimating the thermodynamic parameter behind shock waves generated by underwater wire explosions with different geometries.

Acknowledgements

This research was funded by EPSRC, First Light Fusion Ltd, The Institute of Shock Physics, The ESRF user program, and U.S. Department of Energy under Cooperative Agreements DE-NA0003764 and DE-SC0018088 and Sandia National Laboratories. The authors would also like to thank Harald Reichert of ESRF, Paul Berkvens and the safety team at ESRF, W. G. Proud and D. Chapman of Imperial College, D. Eakins of Oxford University, F. Zucchini and


C. Chauvin of CEA Gramat, and Svetlana Gleizer and Eugene Flyat of the Technion – Israel Institute of Technology for their support in planning these experiments.

ACCEPTED MANUSCRIPT

References

- [1] R. W. Perry and A. Kantrowitz, "The Production and Stability of Converging Shock Waves," *J. Appl. Phys.*, vol. 22, p. 878, 1951.
- [2] B. A. Remington, "High energy density laboratory astrophysics," *Plasma Phys. Control. Fusion*, vol. 47, p. A191, 2005.
- [3] M. K. Matzen, M. A. Sweeney, R. G. Adams, J. R. Asay, J. E. Bailey, G. R. Bennet, D. E. Bliss, D. D. Bloomquist, T. A. Brunner, R. B. Campbell, G. A. Chandler, C. A. Coverdale, M. E. Cuneo, J. -P. Davis, C. Deeney, M. P. Desjarlais, G. L. Donovan, C. J. Garasi, T. A. Haill, C. A. Hall, D. L. Hanson, M. J. Hurst, B. Jones, M. D. Knudson, R. J. Leeper, R. W. Lemke, M. G. Mazarakis, D. H. McDaniel, T. A. Mehlhorn, T. J. Nash, C. L. Olson, J. L. Porter, P. K. Rambo, S. E. Rosenthal, G. A. Rochau, L. E. Ruggles, C. L. Ruiz, T. W. L. Stanford, J. F. Seamen, D. B. Sinars, S. A. Slutz, I. C. Smith, K. W. Struve, W. A. Stygar, R. A. Vesey, E. A. Weinbrecht, D. F. Wenger and E. P. Yu, "Pulsed-power-driven high energy density physics and inertial confinement fusion research," *Phys. Plasmas*, vol. 12, p. 055503, 2005.
- [4] J. H. Lee and B. H. K. Lee, "Cylindrical Imploding Shock Waves," *Phys. Fluids*, vol. 8, p. 2148, 1965.
- [5] H. Schoeffmann, H. Schmidt-Kloiber and E. Reichel, "Time-resolved investigations of laser-induced shock waves in water by use of polyvinylidene fluoride hydrophones," *J. Appl. Phys.*, vol. 63, p. 46, 1988.
- [6] M. J. Edwards, A. J. MacKinnon, J. Zweiback, K. Shigemori, D. Ryutov, A. M. Rubenchik, K. A. Keilty, E. Liang, B. A. Remington and T. Ditmire, "Investigation of Ultrafast Laser-Driven Radiative Blast Waves," *Phys. Rev. Lett.*, vol. 87, p. 085004, 2001.
- [7] Y. E. Krasik, A. Grinenko, A. Sayapin and V. T. Gurovich, "Generation of sub-Mbar pressure by converging shock waves produced by the underwater electrical explosion of a wire array," *Phys. Rev. E*, vol. 73, p. 057301, 2006.
- [8] A. Fedotov, A. Grinenko, S. Efimov and Y. E. Krasik, "Generation of cylindrically symmetric converging shock waves by underwater electrical explosion of wire array," *Appl. Phys. Lett.*, vol. 90, p. 201502, 2007.
- [9] S. Efimov, A. Fedotov, S. Gleizer, V. T. Gurovich, G. Bazalitski and Y. E. Krasik, "Characterization of converging shock waves generated by underwater electrical wire array explosion," *Phys. Plasmas*, vol. 15, p. 112703, 2008.
- [10] G. Bazalitski, V. T. Gurovich, A. Fedotov-Gefen, S. Efimov and Y. E. Krasik, "Simulation of converging cylindrical GPa-range shock waves generated by wire array underwater electrical explosions," *Shock Waves*, vol. 21, p. 321, 2011.

- [11] A. Fedotov-Gefen, S. Efimov, L. Gilburd, S. Gleizer, G. Bazalitski, V. T. Gurovich and Y. E. Krasik, "Extreme water state produced by underwater wire-array electrical explosion," *Appl. Phys. Lett.*, vol. 96, p. 221502, 2010.
- [12] A. Fedotov-Gefen, S. Efimov, L. Gilburd, G. Bazalitski, V. T. Gurovich and Y. E. Krasik, "Generation of a 400 GPa pressure in water using converging strong shock waves," *Phys. Plasmas*, vol. 18, p. 062701, 2011.
- [13] D. Yanuka, A. Rososhek, S. N. Bland and Y. E. Krasik, "Uniformity of cylindrical imploding underwater shockwaves at very small radii," *Appl. Phys. Lett.*, vol. 111, p. 214103, 2017.
- [14] S. N. Bland, Y. E. Krasik, D. Yanuka, R. Gardner, J. MacDonald, A. Virozub, S. Efimov, S. Gleizer and N. Chaturvedi, "Generation of highly symmetric, cylindrically convergent shockwaves in water," *Phys. Plasmas*, vol. 24, p. 082702, 2017.
- [15] M. P. Olbinado, X. Just, J. Gelet, P. Lhuissier, M. Scheel, P. Vagovic, T. Sato, R. Graceffa, J. Schulz, A. Mancuso, J. Morse and A. Rack, "MHz frame rate hard X-ray phase-contrast imaging using synchrotron radiation," *Optics Express*, vol. 25, p. 13857, 2017.
- [16] M. P. Olbinado, V. Cantelli, O. Mathon, S. Pascarelli, J. Grezner, A. Pelka, M. Roedel, I. Prencipe, A. Garcia, U. Helbig, D. Kraus, U. Schramm, T. Cowan, M. Scheel, P. Pradel, T. De Resseguier and A. Rack, "Ultra high-speed x-ray imaging of laser-driven shock compression using synchrotron light," *J. Phys. D: Appl. Phys.*, vol. 51, p. 055601, 2018.
- [17] D. Yanuka, A. Rososhek, S. Theocharous, S. N. Bland, Y. E. Krasik, M. P. Olbinado and A. Rack, "Multi frame synchrotron radiography of pulsed power driven underwater single wire explosions," *J. Appl. Phys.*, vol. 124, p. 153301, 2018.
- [18] "X-ray mass attenuation coefficients of water," NIST, [Online]. Available: <https://physics.nist.gov/PhysRefData/XrayMassCoef/ComTab/water.html>.
- [19] D. Yanuka, A. Rososhek, S. Efimov, M. Nitishinskiy and Y. E. Krasik, "Time-resolved spectroscopy of light emission from plasma generated by a converging strong shock wave in water," *Appl. Phys. Lett.*, vol. 109, p. 244101, 2016.
- [20] S. P. Lyon and J. D. Johnson, *The Los Alamos National Laboratory Equation-of-State Database, LANL Rep. LA UR-92-3407*, 1992.
- [21] M. Kozlov, V. T. Gurovich and Y. E. Krasik, "Stability of imploding shocks generated by underwater electrical explosion of cylindrical wire array," *Phys. Plasmas*, vol. 20, p. 112701, 2013.

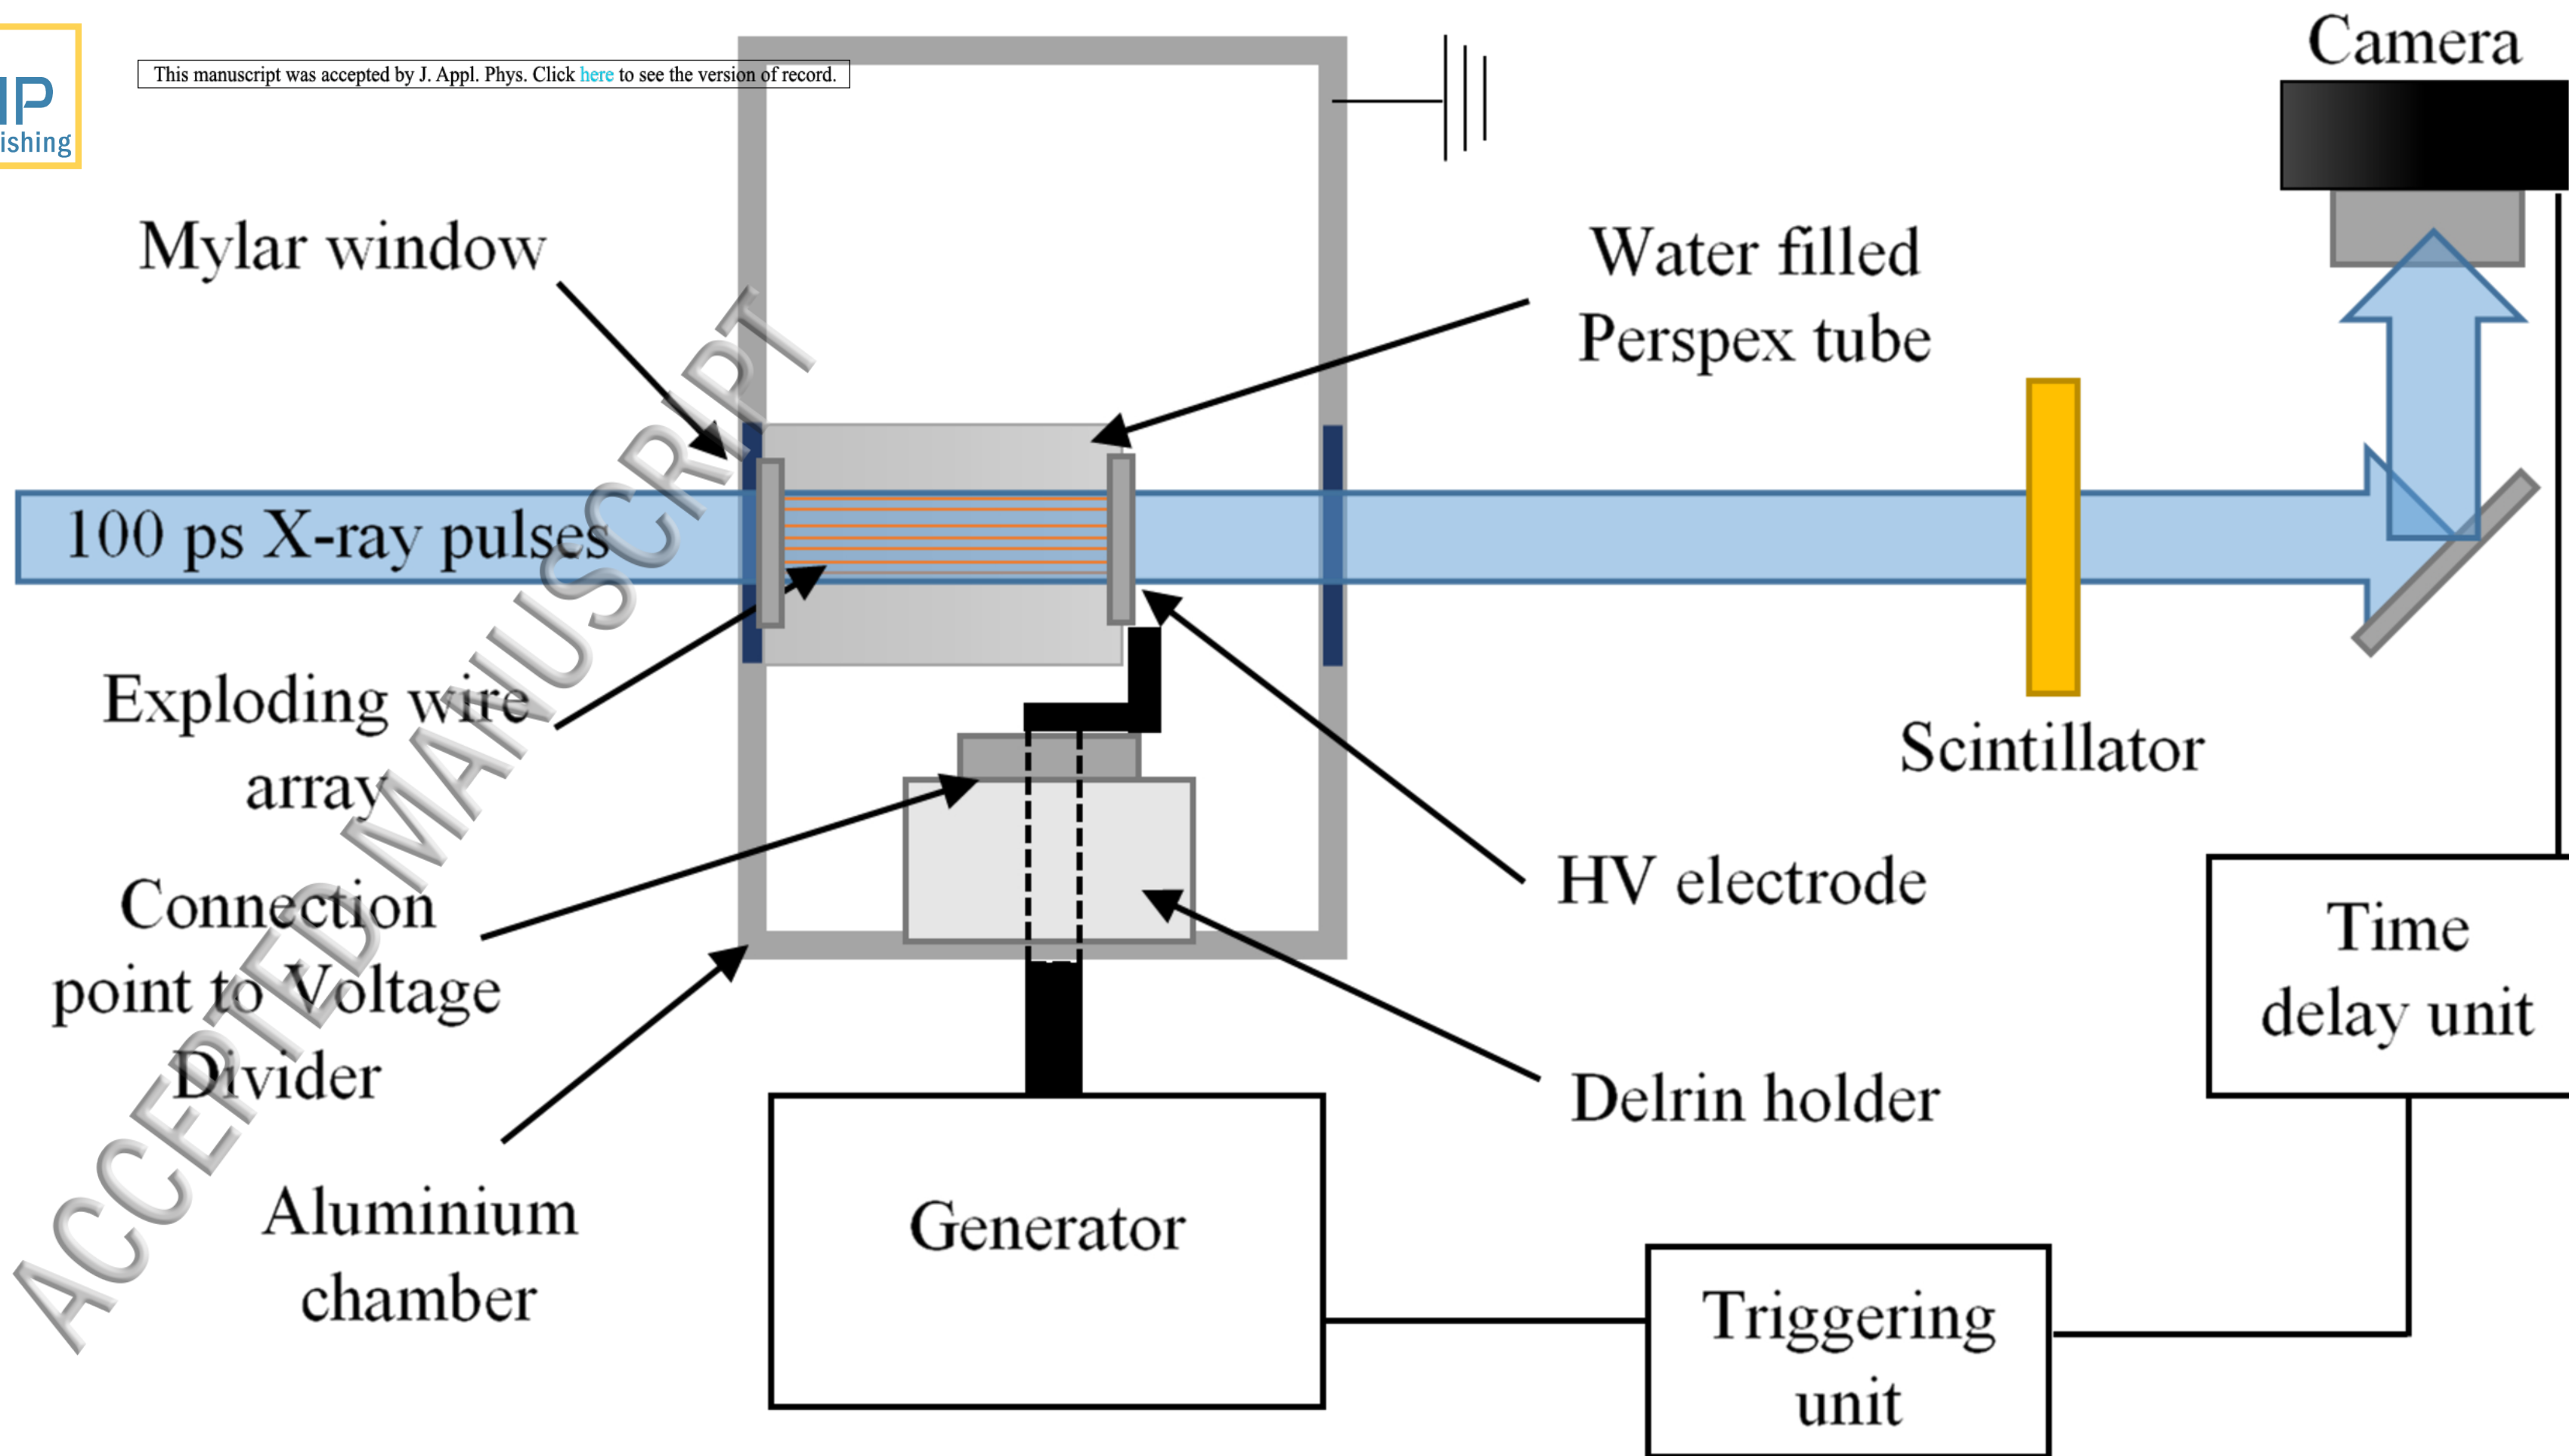

Current (kA)

Voltage (kV)

(a)

Time (μs)

