

Comparative life cycle evaluation of alternative fuels for a futuristic subsonic long-range aircraft

Swapnil S. Jagtap^{a,*}, Peter R.N. Childs^b, Marc E.J. Stettler^a

^a Department of Civil and Environmental Engineering, Imperial College London, London SW7 2AZ, United Kingdom

^b Energy Futures Lab, Imperial College London, London SW7 2AZ, United Kingdom

ARTICLE INFO

Editor: Prof. Raymond Tan

Keywords:

Life cycle assessment
Decarbonising long-range aviation
Climate neutral aviation
Hydrogen aircraft
Alternative aviation fuel
Sustainable aviation fuel

ABSTRACT

Liquid hydrogen (LH₂) and 100 % synthetic paraffinic kerosene (SPK), or sustainable aviation fuel (SAF), represent viable alternatives to conventional Jet-A for long-haul aviation, provided they are produced via pathways enabling net-zero well-to-wake (WTWa) emissions. This study evaluates the WTWa performance, including non-CO₂ emissions, of a blended wing body aircraft (300 passengers, 13,890 km range) powered by either LH₂ or 100 % SPK. Use-phase emissions are quantified, and fuel production impacts are assessed using the GREET model. Analysis of over 100 production pathways reveals that LH₂ can achieve net-zero or negative WTWa CO₂-equivalent emissions when produced from biomass or integrated fermentation with carbon sequestration. Non-CO₂ emissions are shown to contribute significantly to WTWa impacts. When miscanthus is used as a feedstock, 100 % SPK reduces WTWa CO₂-equivalent emissions by 70–85 % compared to Jet-A. A high-level supply analysis indicates that SAF and hydrogen production in 2050 could meet the energy demands of long-haul aviation, assuming a 4 % annual traffic growth rate and full adoption of these fuels. These findings provide critical insights to guide R&D investments, fuel cost analyses, and aviation policy development for sustainable long-haul aviation.

Nomenclature

Abbreviations

ATAG	Air Transport Action Group
ATJ	Alcohol-to-jet
B.	Biological plant type
BC	Black carbon
BWB	Blended wing body
By-product Cl plant	H ₂ produced as a by-product of chlorine manufacturing plant
CAGR	Compound annual growth rate
CDM	Corn with dry mill
CDMWE	Corn dry mill with extraction
CDMWOE	Corn dry mill without extraction
CH ₄	Methane
CO	Carbon monoxide
CO ₂	Carbon dioxide
COG	Coke oven gas
CORSIA	Carbon offsetting and reduction scheme for international aviation
CS	Carbon sequestration

(continued on next column)

(continued)

CUSM	Corn US mix
CWEH	Catalytic with external H ₂ plant type
CWHBG	Catalytic with H ₂ from biomass gasification plant type
CWIH	Catalytic with in-situ H ₂ plant type
CWM	Corn wet mill
D.	Distributed
FFB	Fresh fruit bunch
FT	Fischer–Tropsch
GHG	Greenhouse gas
GREET	Greenhouse Gases, Regulated Emissions, and Energy Use in Technologies
GWP	Global warming potential
HEFA	Hydro-processed esters and fatty acids
HRJ	Hydro-processed renewable jet fuel
HTE	High temperature electrolysis
HTGR	High temperature gas reactor
IATA	International Air Transport Association
IF	Integrated fermentation
LBIGCC	Liquefied using electricity from biomass integrated gasification combined cycle

(continued on next page)

* Corresponding author.

E-mail address: swapniljagtap111@gmail.com (S.S. Jagtap).

(continued)

LCIGCC	Liquification using electricity from coal integrated gasification combined cycle
LDI	Lean direct injection
LH ₂	Liquid hydrogen
LNGCC	Liquification using power from natural gas combined cycle
LTA	large twin aisle
LUSME	Liquification using US mix electricity
L-Nuclear	Liquification using electricity from nuclear energy
L-Solar	Liquification using electricity from solar energy
M	Flight Mach number
MK	McKinsey
MW	Molecular weight
NAFG	North American flared gas
NANG	North American natural gas
NGCC	Natural gas combined cycle
NGL	Natural gas liquid
NO _x	Oxides of nitrogen
N ₂ O	Nitrous oxide
N + 2	2030+ timeframe
OC	Organic carbon
PM	Particulate matter
PtL	Power-to-liquid
ppm _{NOx}	parts per million of oxides of nitrogen
PTWa	Pump-to-wake
PV	Photovoltaics
RNG	Renewable natural gas
SAF	Sustainable aviation fuel
SC	Steam cracking
SI	Supplementary information
SLS	Sea level static
SMR	Steam methane reformation
SOEC	Solid oxide electrolysis cell
SO _x	Oxides of sulphur
SO ₂	Sulphur dioxide
SPK	Synthetic paraffinic kerosene
STJ	Sugar-to-jet fuel
S	Standalone
TCCW	Thermochemical cracking of water
VOC	Volatile organic compound
w CS	With carbon sequestration
WTP	Well-to-pump
WTWa	Well-to-wake
w/o CS	Without carbon sequestration

Symbols

A, a, b, c, d, and e	Correlation constants for emission index based on hydrogen data
A'	Correlation constant for emission index based on Jet-A fuel
EI	Emission index
f _{f/a} or FAR	Fuel air ratio
h'	Flight altitude (in feet)
H	Humidity correction factor
p _{amb}	Ambient pressure (in Pa)
p _{total}	Total pressure (in Pa)
P ₃	Combustor inlet pressure (in MPa)
T _{amb}	Ambient temperature (in K)
T _{total}	Total temperature (in K)
T ₃	Combustor inlet temperature (in K)
W _{F,block}	Block fuel weight
δ _{total}	Pressure correction factor
γ	Specific heat ratio (1.4 for air)
ΔP _p	Fuel injector air flow pressure drop ratio
Φ	Equivalence ratio
Φ _{H₂}	Hydrogen equivalence ratio
τ	Combustor residence time
θ _{total}	Temperature correction factor

1. Introduction

Aviation's climate impact stems from both CO₂ and non-CO₂ effects, including soot, aerosols, water vapor, NO_x emissions, and contrail-induced cirrus clouds (Lee, 2018; Lee et al., 2023, 2021). Currently, aviation contributes 3.5 % to anthropogenic radiative forcing, with non-CO₂ effects accounting for approximately two-thirds of this impact (Lee,

2018; Lee et al., 2023, 2021). Despite the pandemic, air travel demand is projected to double over the next two decades (2024–2043) (Boeing, 2024), significantly exacerbating aviation's climate footprint. While advancements in aircraft technology and low-carbon fuels could address 80 % of the measures needed for carbon-neutral growth (Hupe, 2020; Jagtap et al., 2023), achieving this goal requires a comprehensive understanding of life cycle emissions.

Life cycle emissions from aviation fuels encompass both operational and production phases, with the former contributing ~70 % of total greenhouse gas (GHG) emissions for Jet-A fuel (Chester and Horvath, 2009). Current regulatory and technological efforts primarily focus on operational emissions, but a holistic approach is essential to evaluate the sustainability of alternative fuels. Tools like the GREET model (ANL, 2021a) enable comprehensive life cycle assessments, revealing that not all alternative fuel pathways have low embodied GHG emissions. For instance, while liquid hydrogen (LH₂) offers zero operational emissions and higher energy density than Jet-A, its life cycle GHG emissions can be 3 times as that of conventional Jet-A fuel, when derived from coal.

Decarbonizing long-haul aviation remains a significant challenge (Jagtap et al., 2023; World Economic Forum, 2022). Presently, 100 % synthetic paraffin kerosene (SPK) is not permitted for use in the existing aircraft fleet. Approved drop-in fuels for civil aviation use include up to a 50 % blend of alcohol-to-jet (ATJ), Fischer-Tropsch (FT), and hydro-processed renewable or hydro-processed esters and fatty acids (HRJ or HEFA) SPK pathways, as well as a 10 % blend of sugar-to-jet (STJ) SPK pathway (Jagtap, 2019a, 2019b, 2019c, 2016). Among the alternatives, LH₂ and 100 % SPK are the only viable options for long-range, large twin-aisle (LTA) aircraft, whether tube-wing or blended wing body designs (Jagtap et al., 2024a, 2024b, 2024c, 2023). However, existing studies on SPK and LH₂ often focus solely on operational impacts, neglecting embodied emissions from fuel production (Proesmans and Vos, 2024, 2022). A holistic evaluation framework is therefore critical to identify sustainable fuel pathways and assess their life cycle performance.

This study adopts a life cycle approach to evaluate fuel feedstock and production pathways for LH₂ and 100 % SPK, aiming to enable climate-neutral long-range flights for LTA aircraft. By integrating operational and embodied emissions, this work contributes to the development of a methodological framework for sustainable aviation, addressing gaps identified in recent reviews (Keiser et al., 2023; Pinheiro Melo et al., 2020; Su-ungkavatin et al., 2023a). The analysis focuses on combustion-based LTA aircraft, providing insights into the potential of LH₂ and 100 % SPK as alternatives to conventional Jet-A fuel.

Numerous studies have conducted life cycle or well-to-wake (WTWa) emissions analyses for SPK and LH₂ fuels across various aircraft range applications. These include fossil fuel-based SPK (Kolosz et al., 2020), bio-jet fuel (e.g., Afonso et al., 2023; Braun et al., 2024; De Jong et al., 2017; Jagtap, 2019d), power-to-liquid (PtL) or electro-fuel (e.g., Delbecq et al., 2024; Schmidt et al., 2018), and LH₂ (e.g., Bicer and Dincer, 2017; Mukhopadhyaya and Rutherford, 2022). However, none of these studies comprehensively examine the combination of feedstocks and manufacturing pathways required to achieve climate-neutral long-range flights for LTA aircraft powered by LH₂ and 100 % SPK (bio-jet and PtL fuels). Additionally, many of these analyses exclude non-CO₂ emissions in their WTWa assessments, limiting their applicability to sustainable aviation goals.

Key findings from recent reviews highlight the potential of alternative fuels to reduce WTWa GHG emissions. For instance, Lau et al. (2024) report that HEFA and alcohol-to-jet (ATJ) bio-jet fuels can reduce WTWa GHG emissions by 19–42 % and 20–65 %, respectively. Braun et al. (2024) find that Fischer-Tropsch (FT) SPK fuel derived from miscanthus, agricultural residues, and municipal solid waste can achieve up to 100 % reduction in WTWa GHG emissions, with regional variations exceeding 125 %. Ansell (2023) notes that bio-jet fuel and renewable hydrogen can reduce WTWa CO₂ emissions by 68 % and ~ 80 %, respectively, assuming a fully renewable grid. However, these studies do

not account for non-CO₂ emissions, which are critical for a holistic assessment of aviation's climate impact.

Afonso et al. (2023) and Song et al. (2024) demonstrate that bio-jet fuels can reduce WTwa GHG emissions by up to 80 % (including non-CO₂ emissions) and 41–89 % (excluding non-CO₂ emissions), depending on feedstock and production pathways. Despite these advancements, existing research often focuses on limited or selective feedstocks, leaving gaps in understanding the full potential of alternative fuels for decarbonizing long-haul aviation.

For further details on manufacturing pathways, fuel properties, operability issues, and other aspects of alternative fuels, readers are directed to comprehensive reviews by Su-ungkavatin et al. (2023b), Cabrera and de Sousa (2022), Ansell (2023), and Braun et al. (2024). A detailed review of selected studies is also provided in Supplementary information (SI) file SI Section 1.

Kolosz et al. (2020) compare WTwa performance metrics for blended/drop-in SPK fuels, including fossil fuel-based SPK (derived from coal, oil sands, oil shale, and natural gas) and bio-jet fuels (first, second, and third generation). Similarly, Wei et al. (2019), Pavlenko et al. (n.d.), and De Jong et al. (2017) assess WTwa emissions for bio-jet fuels but focus on limited biomass feedstocks. Studies by the International Civil Aviation Organization (2021) and Prussi et al. (2021) explore bio-jet fuels using feedstocks listed in the CORSIA database, while Elisabeth van der Sman et al. (2021) review WTwa emissions for SPK fuels (bio-jet and PtL) within the EU region. Saad et al. (2024) estimate a ~ 50 % reduction in WTwa emissions for PtL and bio-jet fuels but limit their analysis to Switzerland. Notably, none of these studies account for non-CO₂ emissions from aircraft operations in their WTwa analyses.

Grim et al. (2022) report that PtL fuels can reduce WTwa GHG emissions by 66–94 % (excluding non-CO₂ effects). In the study by Grim et al., the wide range of 66–94 % reduction is attributable to the variability in the sourcing of (carbon) feedstock (direct air capture or point based carbon sourcing), while Sacchi et al. (2023) find reductions of 65–100 % (including non-CO₂ effects) for PtL derived from direct air capture and carbon storage. Micheli et al. (2022) and Papantoni et al. (2022) highlight the role of renewable energy in PtL production, with Micheli et al. (2022) reporting WTwa GHG reductions of 27.6–46.2 % (with non-CO₂ effects) and 52.6–88.9 % (without non-CO₂ effects) for PtL produced using wind power in Germany. Papantoni et al. (2022) observe reductions of 32 % (solar) and 42 % (wind) when non-CO₂ emissions are included. Klenner et al. (2024) find that PtL and LH₂ produced using wind power in Norway reduce WTwa GHG emissions by 48 % and 44 %, respectively, for short flights (<200 km), with higher reductions (52 % for PtL and 54 % for LH₂) for longer flights. Vanlandingham (2024) and Vanlandingham and Hall (2023) report WTwa GHG reductions of 43 % (PtL) and 61 % (LH₂) for a Boeing 737, while Prashanth et al. (2024) estimate reductions of 84–93 % (PtL) and 91–98 % (LH₂) depending on the renewable energy source (solar or wind). Studies by the German Environment Agency (2016) and Schmidt et al. (2018) project near-100 % WTwa GHG reductions for PtL in Germany's future energy mix. However, these analyses are often limited to specific energy landscapes or feedstocks, and the life cycle GHG performance of PtL and LH₂ depends heavily on CO₂ sourcing (direct air capture vs. point sources) and the electricity mix used in production.

Delbecq et al. (2024) evaluate the WTwa performance of bio-jet fuel, PtL, and hydrogen at the aviation system level for a small aircraft. However, the individual WTwa GHG reduction potential of each fuel remains unclear, and the feedstock sourcing for bio-jet fuel is unspecified, while PtL and hydrogen are limited to renewable energy. Fantuzzi et al. (2023) assess alternative aviation fuels but focus on limited feedstocks/pathways for bio-jet fuel (HEFA and ATJ), PtL, and hydrogen (steam methane reformation [SMR] and electrolysis), achieving up to 70 % WTwa GHG savings (excluding non-CO₂ emissions). Their analysis is restricted to the UK energy landscape. Dray et al. (2022) provide a detailed evaluation of alternative fuels, including bio-jet fuel (ATJ, HEFA, FT), PtL (using direct air capture), and hydrogen (electrolysis

with renewable power), considering non-CO₂ emissions. They project an 89–94 % reduction in WTwa GHG emissions by 2050, accounting for efficiency improvements and contrail avoidance, despite a 2–3× increase in demand. However, their study examines limited feedstocks for each fuel.

Quante et al. (2023) report WTwa GHG reductions (excluding non-CO₂ emissions) of 85 % (FT SPK), 100 % (PtL), 54 % (HEFA SPK), 62 % (ATJ SPK), 61 % (STJ SPK), and 80 % (hydrogen), though specific bio-jet fuel feedstocks are unspecified. Penke et al. (2021) find WTwa GHG reductions (excluding non-CO₂ emissions) of 77 % (PtL), 30 % (HEFA from soy oil), and 95 % (renewable hydrogen). Kossarev et al. (2023, 2022) focus on renewable hydrogen, algae-based HEFA, and hydrogenated vegetable oil, achieving WTwa GHG reductions (including non-CO₂ emissions) of 59.5 %, 35.8 %, and 112 %, respectively. These studies are limited to specific energy landscapes or feedstocks, restricting their broader applicability.

Studies on hydrogen as an aviation fuel (Chan et al., 2024; Mazur et al., 2024; Tveitan, 2020) frequently exclude non-CO₂ emissions, a critical oversight. Similar limitations are found in other prior studies (Fantuzzi et al., 2023; Mukhopadhyaya and Rutherford, 2022; Quante et al., 2023; Ratner et al., 2019; Siddiqui and Dincer, 2021). Additionally, many studies (Koroneos et al., 2005; Mazur et al., 2024; Tveitan, 2020) limit feedstock/pathway selection to renewable power, neglecting other potential sources. These similar limitations are observed in other previous literature (Alsamri et al., 2024, 2023; Chan et al., 2024; Mukhopadhyaya and Rutherford, 2022). The impact of aircraft use-phase energy consumption and emissions on WTwa performance is significant, yet studies often fail to account for the poor volumetric energy density of LH₂, which penalizes aircraft energy performance.

Koroneos et al. (2005) examine LH₂ for an A320-type aircraft, considering realistic design effects, but their analysis is outdated and limited in LH₂ production methods. Mukhopadhyaya and Rutherford (2022) project ~100 % WTwa GHG reductions (excluding non-CO₂ emissions) for PtL and LH₂ from renewable electrolysis. Tveitan (2020) reports a 58 % WTwa GHG reduction (excluding non-CO₂ emissions) for green hydrogen, while Chan et al. (2024) find that green hydrogen and bio-jet fuel (feedstock unspecified) can achieve up to 88 % WTwa GHG reductions. However, these studies often omit non-CO₂ emissions, limiting their comprehensiveness.

Miller (2021) and Miller et al. (2023) expand on previous studies by evaluating a broader range of feedstocks and pathways for LH₂ and bio-jet fuels, incorporating contrail-cirrus effects in their WTwa analysis. However, their work excludes PtL or electro-fuels and the STJ pathway, and their results are limited to smaller, shorter-range aircraft, unlike the LTA aircraft focus of this study. The FlyZero report (Job et al., 2022) addresses performance penalties from cryogenic tank installation and includes non-CO₂ emissions in its WTwa analysis of LH₂, PtL, and bio-jet SPK fuels for small to mid-size aircraft. Nevertheless, it examines only a limited number of feedstocks and manufacturing pathways for these fuels.

A critical gap in the existing literature is the lack of comprehensive WTwa analyses that include non-CO₂ emissions and explore diverse feedstock and manufacturing pathway combinations for achieving climate-neutral long-range flights using LH₂ and 100 % SPK (bio-jet and PtL fuels). While studies such as Afonso et al. (2023), Ansell (2023), and others provide valuable insights, they often focus on specific energy landscapes, limited feedstocks, or exclude non-CO₂ effects. Furthermore, none of these studies consider fuel production routes that integrate carbon capture and storage (CCS), except for Fantuzzi et al. (2023), who demonstrate that CCS in SMR-based LH₂ production can reduce WTwa GHG emissions by 60 % (median value). Pavlenko and Searle (2021) highlight hydrogen's critical role in SPK fuel production, emphasizing that green hydrogen can significantly reduce WTwa GHG emissions. However, the sensitivity of hydrogen production to SPK life cycle emissions remains unexplored.

According to the International Air Transport Association (IATA,

2024), achieving net-zero CO₂ emissions by 2050 will require a combination of strategies: sustainable aviation fuels (SAF) contributing 65 %, new aircraft technologies (e.g., electric and hydrogen) 13 %, operational efficiencies 3 %, and offsets/carbon capture 19 %. Carbon removal is identified as a key strategy, yet its integration into fuel production pathways is underexplored. Additionally, none of the reviewed studies estimate the energy demand for long-haul aviation in 2050 or assess whether this demand can be met entirely with 100 % SPK (or SAF) and/or LH₂.

The limitations in existing literature motivate this study, which aims to address critical gaps in understanding the life cycle or WTWa GHG performance of long-range LTA aircraft powered by LH₂ and 100 % SPK, including bio-jet and PtL fuels. This work evaluates over 100 feedstocks and manufacturing pathways, some incorporating CCS, while accounting for non-CO₂ emissions. Additionally, it investigates the sensitivity of hydrogen sourcing to SPK production, biomass sourcing for hydrogen pathways, and the impact of energy mix transitions (2020 vs. 2050). The study also estimates future (2050) energy demand and supply for long-haul aviation using 100 % SPK (or SAF) and LH₂, providing novel contributions to the field.

In the authors' previous work (Jagtap et al., 2024b, 2024c), the engine and operational energy performance of a 2030+ (N + 2 timeframe) blended wing body (BWB) LTA aircraft powered by LH₂ and 100 % SPK was conducted while incorporating penalties from cryogenic tank installation for LH₂. These prior studies based on conceptual design/low order modelling enable estimation of use-phase GHG emissions in the present work, which, combined with manufacturing-phase emissions, facilitates comprehensive WTWa or life cycle emissions analysis. Because the prior studies were conducted using low order modelling, the use phase emission estimation in this work is of low fidelity level. Over

100 production pathways for LH₂, PtL, and bio-jet SPK are examined, including those employing CCS. The primary objectives of this work are:

1. Develop a database of energy, emissions, and materials inventory for alternative fuels produced via various pathways.
2. Assess sensitivities of hydrogen sourcing to SPK production and biomass sourcing for hydrogen pathways.
3. Evaluate aircraft operational-phase emissions, including non-CO₂ effects.
4. Estimate future energy demand and supply (2050) for 100 % SPK (or SAF) and LH₂ in long-haul aviation.

In addition to quantifying CO₂-equivalent emissions, this study evaluates unintended effects of LH₂ and 100 % SPK use, such as fossil fuel consumption, water use, and other emissions. The GREET model (ANL, 2021a), CORSIA default values, and literature are used to create an inventory of manufacturing-phase CO₂-equivalent emissions for over 100 fuel production pathways. Use-phase emissions are modelled for a 2030+ BWB aircraft powered by LH₂ and 100 % SPK, incorporating non-CO₂ emissions from literature to estimate WTWa CO₂-equivalent emissions. Further details are provided in the Supplementary information (SI) document.

2. Methodology

The WTWa emissions or performance of any fuel is the summation of emissions during the fuel manufacturing stage (from raw material extraction stage to its transportation and storage at fuel pump) and the operational phase of the aircraft. The fuel manufacturing stage is referred to as well-to-pump (WTP) and operational phase of aircraft is

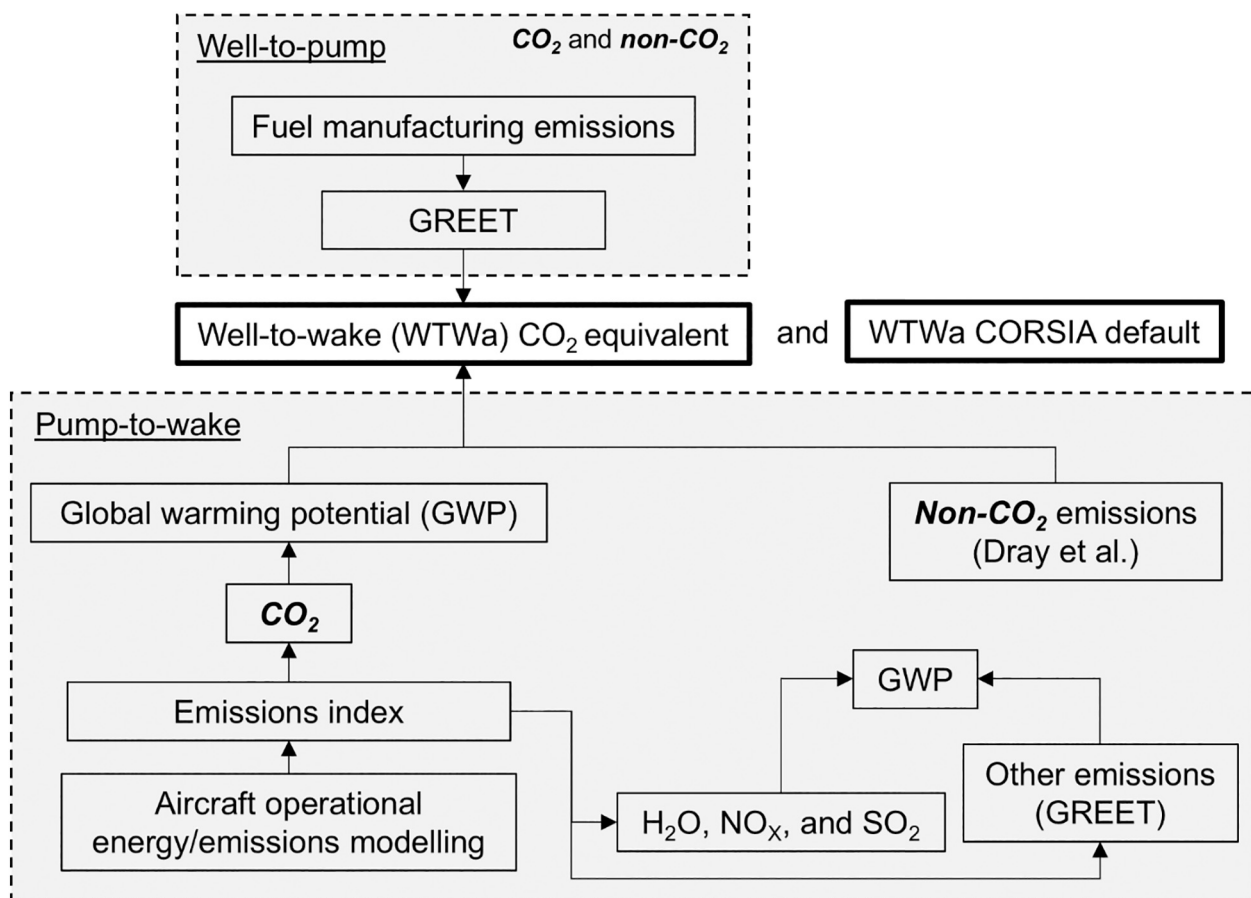


Fig. 1. Schematic of WTWa emissions calculation process from WTP and PTWa emissions.

referred to as pump-to-wake (PTWa). In this work, it is assumed that for all fuels the pump to aircraft tank emissions and/or leakages are zero. Fig. 1 shows the schematic of WTWa emissions calculation process from WTP and PTWa emissions, used in this work. Referring to Fig. 1, WTWa CORSIA default values (2021), are available directly from literature and these are listed in Table SI 5 (in SI Section 1). It is to be noted that the CORSIA default values are limited to a few feedstocks and/or pathways for bio-jet fuel. The methodology for WTWa emissions calculation is split into WTP and PTWa as separate models, or estimation procedures are required. The methodology for estimating WTP and PTWa is discussed separately in Sections 2.1 and 2.2, respectively. It is to be noted that for both 100 % SPK and LH₂, all feedstocks and manufacturing pathway combinations that are available in GREET model are explored in this work. The latest version of the GREET model is available both in .NET framework and as Excel Spreadsheet from resource (ANL, 2024). The version of the GREET model used in this work is available in resource (ANL, 2021b) [email registration is required before it can be downloaded] and it is also provided as a Supplementary information file (.zip file).

2.1. Well to pump emissions

Referring to Fig. 1, the GREET model is used for making a database of fuel manufacturing phase emissions for LH₂ and 100 % SPK (bio-jet fuel and PL). The different processes of manufacturing LH₂ and 100 % SPK routes are reviewed/discussed in SI Section 2. The GREET model is documented extensively in literature (report, articles, manual, etc.) and the list of publications can be found in resource (ANL, n.d.). It is to be noted that the GREET model is USA specific, and thus is a limitation of this work. For both LH₂ and 100 % SPK, a wide range of manufacturing pathways and/or feedstocks are examined. For a fuel under consideration, not all feedstocks and/or pathways are considered for whole WTWa analysis. Most feedstocks and/or pathways are screened out based on their WTP performance for computational compactness and ease. Additionally, a few parameters are identified from literature to which the WTP emissions are sensitive, and these parameters are varied in GREET, for each fuel type under examination, and these are detailed next. It is to be noted that GREET model includes all emissions in WTP phase including transportation of products/raw materials and indirect emissions (land use change).

2.1.1. Liquid hydrogen

Table 1 lists the different feedstock and/or pathways for producing hydrogen at centralised manufacturing unit with or without carbon sequestration facility and type of liquification used. There are in total 59 different ways to produce LH₂ from centralised manufacturing units in the USA as simulated, using GREET model (ANL, 2021a).

There are two assumptions/models for hydrogen production in GREET: (a) H2A model of National Renewable Energy Lab, USA (b) Industry data. 59 cases (and Jet-A) are simulated for both hydrogen production assumptions, wherever applicable and available. For example: Industry data assumptions are applicable/available in GREET for all 59 cases except four cases: (a) North American natural gas (NANG) with carbon sequestration (w CS) and hydrogen liquification using US mix electricity (LUSME); (b) renewable natural gas (RNG) w CS LUSME; (c) NANG w CS and liquification using power from natural gas combined cycle (LNGCC); (d) RNG w CS LNGCC. Similarly, H2A model assumptions are applicable/available in GREET for all 59 cases except 18 cases: six feedstocks each (willow, poplar, switchgrass, corn stover, forest residue, and miscanthus) for biomass manufacturing plant type w CS for both LUSME type and hydrogen liquefied using electricity from biomass integrated gasification combined cycle (LBIGCC), and six feedstocks (same as above) with integrated fermentation manufacturing plant type w CS.

In the results section (Section 3), for each of the 59 manufacturing cases, the sensitivity of the selection of model assumptions (H2A or

Table 1

List of different feedstocks and/or pathways of producing hydrogen at centralised manufacturing unit with or without carbon sequestration facility and type of liquification used.

Type of LH ₂	Pathways/Feedstock	Carbon sequestration (CS)	Liquification type
Grey	Coal	Without (w/o) CS	Liquefied using US mix electricity (LUSME)
		With (w) CS	Liquification using electricity from coal integrated gasification combined cycle (LCIGCC)
	Coke oven gas (COG)	–	LUSME
Blue	North American Natural Gas (NANG)	w/o CS	LUSME
		w CS	Liquification using power from natural gas combined cycle (LNGCC)
	H ₂ as a by-product of natural gas liquid (NGL) steam cracking (SC)	–	LUSME
Green	Renewable natural gas (RNG)	w/o CS	LUSME
		w CS	LNGCC
	Solar photovoltaics (PV)	–	LUSME
		–	Liquification using electricity from solar energy (L-Solar)
	Nuclear thermochemical cracking of water (TCCW)	–	Liquification using electricity from nuclear energy (L-Nuclear)
		–	LUSME
	Nuclear high temperature gas reactor (HTGR)	–	L-Nuclear
		–	LUSME
	Biomass	w/o CS	LUSME
		–	Liquification using electricity from biomass integrated gasification combined cycle (LBIGCC)
	Biomass	Willow	LUSME
		Poplar	
	Biomass	Switchgrass	LUSME
		Corn stover	
	Biomass	Forest residue	LUSME
		Miscanthus	
	Biomass	Willow	LUSME
		Poplar	
	Biomass	Switchgrass	LUSME
		Corn stover	
	Biomass	Forest residue	LUSME
		Miscanthus	
	Biomass	Willow	LUSME
		Poplar	
	Biomass	Switchgrass	LUSME
		Corn stover	
	Biomass	Forest residue	LUSME
		Miscanthus	
	Integrated fermentation (IF) (biomass)	Willow	LUSME
		Poplar	
	Integrated fermentation (IF) (biomass)	Switchgrass	LUSME
		Corn stover	

(continued on next page)

Table 1 (continued)

Type of LH ₂	Pathways/Feedstock	Carbon sequestration (CS)	Liquification type
	Forest residue		
	Miscanthus		
	Willow	w CS	
	Poplar		
	Switchgrass		
	Corn stover		
	Forest residue		
	Miscanthus		
	High temperature electrolysis with solid oxide electrolysis cell (HTE SOEC) using electricity from Nuclear HTGR for electrolysis	–	LUSME
	HTE SOEC using electricity from natural gas combined cycle (NGCC) for electrolysis		
	H ₂ produced as a by-product of chlorine manufacturing plant (By-product Cl plant)		

industry data) is reflected as a range of values. This is the first sensitivity parameter. Additionally, each of the 59 manufacturing cases (and Jet-A) with respective manufacturing model assumptions is simulated for year 2020 and 2050. This is essentially to check the sensitivity of US energy mix, the second sensitivity parameter, on LH₂ WTWa emissions. The energy mixes for both 2020 and 2050 are listed in Table 2. According to Table 2, the USA energy mix in 2050 is expected to be dominated by more renewable energy sources, especially solar energy (photovoltaics [PV]). The objective of this work is to find (fuel) feedstock and pathway combinations that enable climate neutral long-range flight. Thus, after examining 59 cases, only LH₂ manufacturing options that provide near-zero and/or negative CO₂ equivalent emissions are considered for further WTWa analysis.

2.1.2. 100 % synthetic paraffin kerosene

2.1.2.1. Preliminary shortlisting of feedstocks and pathways. In this section, four SPK fuel pathways are examined using the GREET model, where the 100 % SPK fuel is produced from different feedstocks and manufacturing schemes. These are ATJ, STJ, HRJ or HEFA, and FT. For each of the four SPK fuel pathways, different feedstocks and manufacturing schemes are evaluated. Tables 3 and 4 list different feedstocks and manufacturing schemes for 100 % SPK produced from ATJ (18 cases) and STJ (24 cases), and FT (eight cases) and HEFA (four cases each of food and non-food crops) pathways, respectively.

For HEFA, though there are eight feedstocks in total that are considered purely as an academic exercise in Table 4, only four non-food crops will be considered as feedstocks for fuel production in this work for further consideration. This arises from social concerns of using food crops for fuel production. In total there are 54 different ways (58 ways if food crops are included) in which 100 % SPK can be produced using the

Table 3

List of different feedstocks and manufacturing schemes for 100 % SPK produced from ATJ and STJ pathways.

ATJ schemes and feedstocks (18 cases)		STJ schemes and feedstocks (24 cases)	
Feedstocks in standalone (S.) scheme	Feedstocks in distributed (D.) scheme	STJ manufacturing schemes	Feedstocks for each of the four STJ manufacturing schemes
Corn with dry mill (CDM)	Corn US mix (CUSM)	Biological plant type (B.)	Poplar
Poplar	Corn dry mill without extraction (CDMWOE)	Catalytic with external H ₂ plant type (CWEH.)	Forest residue
Forest residue	Corn dry mill with extraction (CDMWE)	Catalytic with in-situ H ₂ plant type (CWIH.)	Miscanthus
Miscanthus	Corn wet mill (CWM)	Catalytic with H ₂ from biomass	Switchgrass
Switchgrass	Poplar	gasification plant type (CWHBG.)	Willow
Willow	Forest residue		Corn stover
Corn stover	Miscanthus		
	Switchgrass		
	Willow		
	Corn stover		
	Solid waste		

Table 4

List of different feedstocks and manufacturing schemes for 100 % SPK produced from FT and HEFA pathways.

FT feedstocks (8 main cases)	HEFA feedstocks (8 cases)
North American (NA) natural gas (NANG)	Food-crops
Non-NA natural gas (non-NANG)	Soybean
Non-NA flared gas (non-NAFG)	Palm FFB (fresh fruit bunch)
BIOMASS*	Canola
Coal	Corn oil
Coal (50 %) + biomass* (50 %) (share by mass)	Non-food feedstocks
Natural gas (50 %) + biomass* (50 %) (share by mass)	Algae
Electro-fuel (or PTL)	Camelina
*Poplar, forest residue, miscanthus, switchgrass, willow, corn stover	Jatropha
	Carinata

above four pathways and feedstock combinations. These 54 manufacturing options are examined and only the options that provide lowest or negative CO₂ equivalent emissions for each of the four pathways are considered for sensitivity analysis (discussed next) and further WTWa analysis.

2.1.2.2. Manufacturing emissions sensitivity to identified parameters. According to the study by Pavlenko et al. (Pavlenko and Searle, 2021), hydrogen is one of the important component required in the SPK fuel manufacturing process and therefore it contributes significantly to the life cycle GHG emissions of SPKs, especially for HEFA and STJ pathways. Additionally, the use of green hydrogen for producing SPKs could be useful to reduce the life cycle greenhouse gas emissions (Pavlenko and

Table 2

US energy mix in 2020 and 2050 – share of different energy sources for electricity production (stationary use).

2020 USA energy mix (ANL, 2021a)				2050 USA energy mix (Energy Information Administration, 2021)			
Source	%	Others source	%	Source	%	Others source	%
Residual oil	0.4	Hydroelectric	38.1	Residual oil	0.0 %	Hydroelectric	13.0 %
Natural gas	39.6	Geothermal	2.1	Natural gas	36.0 %	Geothermal	2.0 %
Coal	20.0	Wind	45.9	Coal	11.0 %	Wind	34.0 %
Nuclear power	20.4	Solar PV	11.4	Nuclear power	11.0 %	Solar PV	47.0 %
Biomass	0.3	Miscellaneous	2.5	Biomass	0.0 %	Miscellaneous	4.0 %
Others	19.4			Others	42.0 %		

Searle, 2021). From the exercise on LH₂ discussed in Section 2.1.1, the feedstocks/pathways that enable a near-zero or negative emissions fuel production are used for this sensitivity analysis. For example, if solar-PV and biomass routes of hydrogen production are shortlisted via the approach detailed in Section 2.1.1, then these routes will be used for producing the required hydrogen in the manufacturing process of a given SPK pathway. In the results section (Section 3), for each of the shortlisted SPK fuel manufacturing case, the sensitivity of the hydrogen production route for manufacturing SPK fuel, is reflected as a range of values. The hydrogen production route for manufacturing SPK fuel is the first sensitivity parameter.

Additionally, similar to the exercise for LH₂, the WTP emissions for SPKs are simulated for year 2020 and 2050 (more renewable energy sourcing), and this is useful in the estimation of the sensitivity of US energy mix, the second sensitivity parameter, on 100 % SPK WTP emissions.

2.2. Pump to wake emissions

In the authors' previous studies (Jagtap et al., 2024b, 2024c), the engine (ultrahigh bypass ratio geared turbofan) and aircraft operational energy performance modelling of a 2030+ (N + 2 timeframe) BWB LTA aircraft powered by Jet-A, LH₂, and 100 % SPK (separately) are conducted. For the LH₂ aircraft, the penalties due cryogenic tank installation are modelled. The Jet-A, LH₂, and 100 % SPK aircraft operational performance enables the estimation of emissions in the aircraft use-phase. Additionally, the engine cycle parameters required for PTWa emissions modelling are known for the aircraft from authors' previous study (Jagtap et al., 2024b). The PTWa emissions estimation process for the BWB aircraft (Jet-A, 100 % SPK, and LH₂) modelled in (Jagtap et al., 2024b, 2024c) is considered next. It is to be noted that these prior studies model the engine and aircraft using low order modelling methods, therefore the emission modelling would be at a low fidelity level. The reader is advised to explore studies (Chen et al., 2024a, 2024b; Ge et al., 2022; Zhao et al., 2024) for high order modelling of non-volatile particulate matter, NO_x, carbon monoxide, and hydrocarbon emission, especially for Jet-A fuel.

2.2.1. Oxides of nitrogen

In the authors' previous study (Jagtap et al., 2024b), the use of the lean direct injection (LDI) combustor type in the BWB aircraft (Jet-A, 100 % SPK, and LH₂) is discussed. In terms of oxides of nitrogen (NO_x) emission modelling for this combustor, the emission index (EI) estimation process for NO_x is known from the study by Marek et al. (Marek et al., 2005), which is based on experiments conducted by NASA. The $EI_{NOx,Jet-A}$ (grams NO_x per kg fuel) i.e., emissions index for Jet-A LDI combustor is given by Eq. (1) (source (Marek et al., 2005)),

$$EI_{NOx,Jet-A} = A'(143P_3)^{0.594} e^{\left((T_3 - 255)/194\right)} \left(\frac{f}{a}\right)^{1.6876} \left(100 \frac{\Delta P}{P}\right)^{-0.56}, \quad (1)$$

where A' , P_3 (MPa), T_3 (K), $\frac{f}{a}$, and $\frac{\Delta P}{P}$ (%) are correlation constant for emission index based on Jet-A fuel, combustor inlet pressure, combustor inlet temperature, fuel to air ratio, and fuel injector air flow pressure drop ratio, respectively. A' is 14 for advanced LDI technology, and P_3 , T_3 , and $\frac{f}{a}$ are known from authors' previous study (Jagtap et al., 2024b) (GasTurb engine modelling for engines powered by different fuels). A nominal value of 4 % for $\frac{\Delta P}{P}$ is used for the combustor design (for both Jet-A and hydrogen) as reported by Marek et al. (Marek et al., 2005) and is used in this work for NO_x modelling. It is assumed in this work that Eq. (1) is also applicable to 100 % SPK, and respective P_3 , T_3 , and $\frac{f}{a}$ are used (known from authors' previous study (Jagtap et al., 2024b)).

For hydrogen, C4 type of LDI combustor configuration (please refer

to authors' previous study (Jagtap et al., 2024b) for details about all configurations) is used in this work for emissions modelling, as according to Marek et al. (Marek et al., 2005), it was the only configuration that performed the best from a low NO_x and durability criteria. For hydrogen, NO_x is estimated in terms of parts per million (ppm) i.e. ppm_{NOx} , in the study by Marek et al. (Marek et al., 2005). The calculation of ppm_{NOx} for hydrogen LDI combustor is given by Eq. (2) (source (Marek et al., 2005)),

$$ppm_{NOx} = A(143P_3)^a (\phi_{H_2})^b (\tau)^c e^{\left((1.8T_3 - 460)/d\right)} \left(\frac{\Delta P}{P}\right)^e, \quad (2)$$

where A, a, b, c, d , and e are correlation constants for emission index based on hydrogen data, and ϕ_{H_2} and τ are hydrogen equivalence ratio and combustor residence time, respectively. For C4 configuration, the values of A, a, b, c, d , and e are known to be 9.355, 0.275, 4.12, 0.455, 211, and –0.288, respectively. ϕ_{H_2} is calculated from the fuel to air ratio according to the definition in authors' previous study (Jagtap et al., 2024b). The fuel to air ratio and τ are known from authors' previous study (Jagtap et al., 2024b) (GasTurb engine modelling). The generic equation for the estimation of EI_{NOx} from ppm_{NOx} is given by Eq. (3) (source (Marek et al., 2005)),

$$EI_{NOx} = \frac{1}{1000} \frac{MW \text{ of } NO_2}{MW \text{ of combustion products}} \frac{(1 + f/a)}{f/a} ppm_{NOx} \quad (3)$$

where MW is the molecular weight for respective species. The MW of NO₂ is 46 and for the combustion products it is calculated using the 'major species' combustion model as described in authors' previous study (Jagtap et al., 2024b). Therefore, once ppm_{NOx} is calculated using Eq. (2), the EI_{NOx} can be estimated using Eq. (3) for a given fuel case where the f/a is known.

It is to be noted that Eqs. (1) and (2) that estimate NO_x are applicable to typical temperature and pressure combination during cruise, according to Marek et al. (Marek et al., 2005). Therefore, using Eq. (1), and Eqs. (2)–(3) the cruise EI_{NOx} for Jet-A (and 100 % SPK) and LH₂ aircraft can be calculated, respectively.

For estimating EI_{NOx} at other points in the flight mission, the 'DLR fuel flow correlation' method (Schaefer and Bartosch, 2013) is used which is dependent on pressure, temperature, and Mach number, for respective flight segment. After calculating cruise EI_{NOx} , the EI_{NOx} at sea level static (SLS) ($EI_{NOx,SLS}$) point can be calculated using the DLR method, where both EI_{NOx} are related by parameters that depend on flight altitude, ambient pressure and temperature, and flight Mach number. Thus, now knowing the $EI_{NOx,SLS}$, the EI_{NOx} at other flight points like engine start and warm up, taxi out, take-off, climb, descent and approach, loiter, landing, taxi in, and shutdown, can be calculated knowing the respective flight altitude, ambient pressure and temperature, and flight Mach number. The relation between $EI_{NOx,SLS}$ and EI_{NOx} at other flight points is given by Eq. (4),

$$EI_{NOx} = EI_{NOx,SLS} \delta_{total}^{0.4} \theta_{total}^3 e^H, \quad (4)$$

$$\text{where } \delta_{total} = \frac{P_{total}}{101325 \text{ Pa}}, \quad (5)$$

$$\theta_{total} = \frac{T_{total}}{288.15 \text{ K}}, \quad (6)$$

$$H = -19 \left(-0.00634 + 0.001 e^{-0.0001426 (H' - 12900)} \right), \quad (7)$$

$$P_{total} = P_{amb} \left(1 + \frac{(Y-1)}{Y} M^2 \right)^Y / (Y-1), \text{ and} \quad (8)$$

$$T_{total} = T_{amb} \left(1 + \frac{(Y-1)}{Y} M^2 \right). \quad (9)$$

p_{amb} , p_{total} , T_{amb} , T_{total} , M , γ , δ_{total} , θ_{total} , $El_{NO_x,SLS}$, H , and h' are ambient pressure (in Pa), total pressure (in Pa), ambient temperature (in K), total temperature (in K), flight Mach number, specific heat ratio (1.4 for air), pressure correction factor, temperature correction factor, NO_x emission index at SLS, humidity correction factor, and flight altitude (in feet), respectively.

The breakdown of mission fuel burn or block fuel ($W_{F,block}$, in kg) for Jet-A, 100 % SPK, and LH₂ (case 3) is known from the authors' previous study (Jagtap et al., 2024c) at different flight segments such as engine start and warm up, taxi out, take-off, climb, cruise descent and approach, loiter, landing, taxi in, and shutdown. After calculating El_{NO_x} for these segments, the quantity of NO_x (kg) emitted can be calculated. Table SI 6 (in SI Section 3) lists the engine parameters required to estimate El_{NO_x} during cruise (in Eqs. (1)–(3)) for different fuel cases. Table SI 7 (in SI Section 3) provides the operational conditions and fuel burn for different fuels at various flight segments needed for estimating El_{NO_x} (using Eqs. (4)–(9)). For estimating the speed of the aircraft during taxi out (20 knots (Boeing, 2007)), take-off (150 knots (“AIRBUS A350-900 - SKYbrary Aviation Safety,” n.d., “What do you know about take-off speed? V1, Vr, and V2,” n.d.)), descent (average descent 250 knots (“AIRBUS A350-900 - SKYbrary Aviation Safety,” n.d.)), and landing (155 knots approach-landing speed (“Airbus A350-800 - Price, Specs, Photo Gallery, History - Aero Corner,” n.d., “AIRBUS A350-900 - SKYbrary Aviation Safety,” n.d.)), the speed of present-day LTA aircraft are used (values in SI system in Table SI 7 (in SI Section 3)).

2.2.2. Carbon dioxide, water vapor, sulphur dioxide, other emissions, and contrails

Table SI 8 (in SI Section 3) lists the emission index of different species and contrails for the three fuels under consideration. CO₂, H₂O, and sulphur dioxide (SO₂) emission vary linearly with fuel burn. The production of species like volatile organic compounds (VOC), carbon monoxide (CO), particulate matter 10 and 2.5 (PM₁₀ and PM_{2.5} respectively), oxides of sulphur (SO_x) (total), black carbon (BC), organic carbon (OC), methane (CH₄), and nitrous oxide (N₂O), after Jet-A and 100 % SPK fuel combustion is not linearly dependent on fuel burn and its estimation requires detailed combustion physics-based modelling. It is to be noted that the impacts of non-CO₂ emissions, especially contrails, vary by region, altitude, humidity, time of the day, etc. Non-CO₂ emissions are uncertain, and difficult to quantify, and depend on type of technology and fuel used – they are not linearly dependent on the fuel burn.

Future LDI combustors are expected to have significantly lower emission indices for these species. In this work, it is assumed that the emission index for these species in the future (N + 2 timeframe) BWB remains similar to the present-day emission index listed in Table SI 8 (in SI Section 3) for LTA aircraft. Similarly, contrail modelling requires detailed physics-based simulation which should capture the effects of nucleation particles and/or lubrication oil from the aircraft engine acting as nuclei for ice formation, presence of nucleation particles in atmosphere (concentration expected to vary with time), and interaction of engine wake and wing-tip vortices. In this work, for aircraft's operational phase (PTWa) though all non-CO₂ emissions are calculated except for contrails, the CO₂ equivalent for the total non-CO₂ emissions (in g/MJ) for Jet-A, 100 % SPK or SAF, and LH₂ reported by Dray et al. (2022) is used directly. The CO₂ equivalent of the total non-CO₂ emissions during aircraft's operational phase for Jet-A, 100 % SPK or SAF, and LH₂ are 9.4–54 g/MJ, 6–47 g/MJ, and 11–68 g/MJ, respectively (Dray et al., 2022).

2.3. Global warming potential

Table SI 9 (in SI Section 3) lists the global warming potential (GWP) of NO_x and H₂O at different mission segments. The GWP of NO_x increases from a negative value at zero altitude to a positive value at 11 km altitude (Svensson, 2005). A study by Svensson (2005) provides the

variation of GWP of NO_x and H₂O with altitude. The GWP of H₂O is zero until 9 km (from zero altitude) and increases thereafter. For cruise, the most recent GWP values for NO_x and H₂O from the study by Lee et al. (2021) are used in this work and are listed in Table SI 9 (in SI Section 3). At zero and low altitudes (< 2 km), the GWP of NO_x provided by GREET model (ANL, 2021a) is used here. For altitude between 2 km and 10.67 km (cruise), the NO_x GWP provided in a study by Svensson (2005), is used in this work. Table SI 10 (in SI Section 3) provides the GWP of all emissions in the WTP and PTWa phase.

2.4. Other unintended environmental and social impacts

In addition to the CO₂ and non-CO₂ effects of aircraft on climate, there are other metrics that should be considered and quantified. These include the use of fossil fuels, water consumption, and WTPa emissions that affect air-quality. The emissions that are considered include VOC, CO, NO_x , PM₁₀, PM_{2.5}, SO_x, BC, and OC. These emissions affect both the environmental and human health. It is assumed that the emission index for VOC, CO, PM₁₀, PM_{2.5}, SO_x, BC, and OC for the future (N + 2 timeframe) BWB remains similar to the present-day emission index listed in Table SI 8 (in SI Section 3) for LTA aircraft. The use of fossil fuels (natural resource) has an environmental impact, and water consumption has both environmental and social impact. The WTPa data for VOC, CO, PM₁₀, PM_{2.5}, SO_x, BC, and OC is directly obtained from GREET model. WTPa NO_x is calculated from WTP NO_x obtained from GREET, and PTWa NO_x calculated from methodology described in Section 2.2.1. The data for use of fossil fuels and water consumption is directly obtained from GREET model.

2.5. Future worldwide energy demand and supply of sustainable aviation fuel and green hydrogen

The total Jet-A fuel consumption for 2024/25 is known to be 14.04 EJ from IATA (International Air Transport Association, 2024) and Boeing's CASCADE tool (“Boeing Cascade Climate Impact Model,” n.d.). Long-haul aviation contributes to 37 % (Graver et al., 2020) – 43 % (Teoh et al., 2024) of the total aviation fleet CO₂ emissions. Therefore, the energy demand for long-haul aviation is presently 37 % – 43 % of 14.04 EJ. In this work, the energy demand for long-haul aviation in 2050 is calculated for two traffic growth rate cases i.e. 3 % and 5 % compound annual growth rate (CAGR). For this calculation, it is assumed that the share of energy demand of long-haul aviation to total aviation energy demand will stay constant in future (i.e. 37 % – 43 %).

The quantification of future supply potential of SPK or SAF is conducted using data available from Boeing SAF dashboard (“Boeing SAF Dashboard - Boeing Cascade Climate Impact Model,” n.d.) and Air Transport Action Group (ATAG) report (“Waypoint 2050 2nd edition: September 2021 (full report and summary) | ATAG,” n.d.). Boeing SAF dashboard provides global SAF supply potential until 2035, and it provides data for operational manufacturing unit along with other plant types such as planned, aspirational, final investment decision, under construction, and pending final investment decision. ATAG report provides global SAF supply potential for 2050, for three supply scenarios.

Similarly, the quantification of future supply potential of green hydrogen is carried out using data available from the International Energy Agency (IEA) hydrogen dashboard (“Hydrogen production projects interactive map – Data Tools - IEA,” n.d.), McKinsey report (“Global Energy Perspective 2023: Hydrogen outlook | McKinsey,” n.d.), and ATAG report (“Waypoint 2050 2nd edition: September 2021 (full report and summary) | ATAG,” n.d.). The IEA hydrogen dashboard provides hydrogen supply until 2030 for different manufacturing plant types, where low-carbon hydrogen is produced from electrolysis, fossil fuel with carbon capture, utilization and storage, and other routes. These manufacturing plant types include conceptual, demonstration projects, feasibility study, under construction and operational plants. McKinsey report provides four supply scenarios. Lastly, ATAG report provides

global hydrogen supply potential for 2050, for three supply scenarios. It is to be noted that the effect of different supply scenarios of SAF and hydrogen is considered in this work via a range of energy supply values for each fuel.

3. Results and discussion

3.1.1. Well to wake emissions for liquid hydrogen

Fig. 2 shows the WTWa comparison of different LH₂ feedstocks and/or pathways (59 manufacturing cases) for 2020 and 2050 US energy mix (with only CO₂ emissions in PTWa phase). In this figure, for the WTP stage all greenhouse gas emissions are considered but for PTWa only CO₂ emissions are included. The non-CO₂ emissions are included later in Section 3.1.3. As discussed in Section 2.1.1, sensitivity to two parameters is analysed. For each of the 59 manufacturing cases, the sensitivity of the selection of model assumptions (H2A or industry data) is reflected as a range of values. This is the first sensitivity parameter.

Additionally, each of the 59 manufacturing cases (and Jet-A) with respective manufacturing model assumptions is simulated for both 2020 and 2050 to check the sensitivity of US energy mix - the second sensitivity parameter, on LH₂ WTWa emissions.

It can be observed from Fig. 2 that grey and blue hydrogen WTWa emissions are of the similar magnitude as that of Jet-A or more, regardless of the hydrogen production assumptions used or the energy mix type. Additionally, not all green hydrogen manufacturing cases have

near zero or sub-zero WTWa CO₂ equivalent emissions. Certain manufacturing schemes like IF w/o CS, HTE SOEC – NGCC, and By-prod Cl plant have higher WTWa CO₂ equivalent emissions than Jet-A. This can be attributed to the low manufacturing efficiency resulting in higher WTWa GHG emissions.

As discussed in Section 2.1.1, only the LH₂ manufacturing options that provide near-zero and/or negative CO₂ equivalent emissions are considered for further WTWa analysis (including non-CO₂ emissions in PTWa). The LH₂ manufacturing cases that have near-zero and/or negative CO₂ equivalent emissions are RNG w CS LUSME, RNG w CS LNGCC, solar PV L-solar, nuclear HTGR LUSME, biomass w/o CS LBIGCC, biomass w CS LUSME, biomass w CS LBIGCC, and IF w CS. These eight cases will be considered for further WTWa analysis in Section 3.1.3, which includes non-CO₂ emissions in PTWa.

3.1.2. Well to wake emissions for 100 % synthetic paraffin kerosene

3.1.2.1. Preliminary shortlisting of 100 % synthetic paraffin kerosene feedstocks and pathways. Figs. 3, 4, 5, and 6 provide the WTWa comparison of different FT, HEFA, ATJ, and STJ feedstocks, respectively, for 2020 (with only CO₂ emissions in PTWa phase). It can be observed from Fig. 3 that electro-fuel (E-fuel) or PtL, and biomass are the two feedstocks/routes that have lowest (almost zero) WTWa CO₂ equivalent emissions and are shortlisted for further analysis. For the biomass case, six feedstocks are considered that include willow, poplar, switchgrass, miscanthus, corn stover, and forest residue. This is included as a range in Fig. 3. Switchgrass has a poor performance whereas forest residue provides a greater reduction in WTWa CO₂ equivalent emissions and is thus

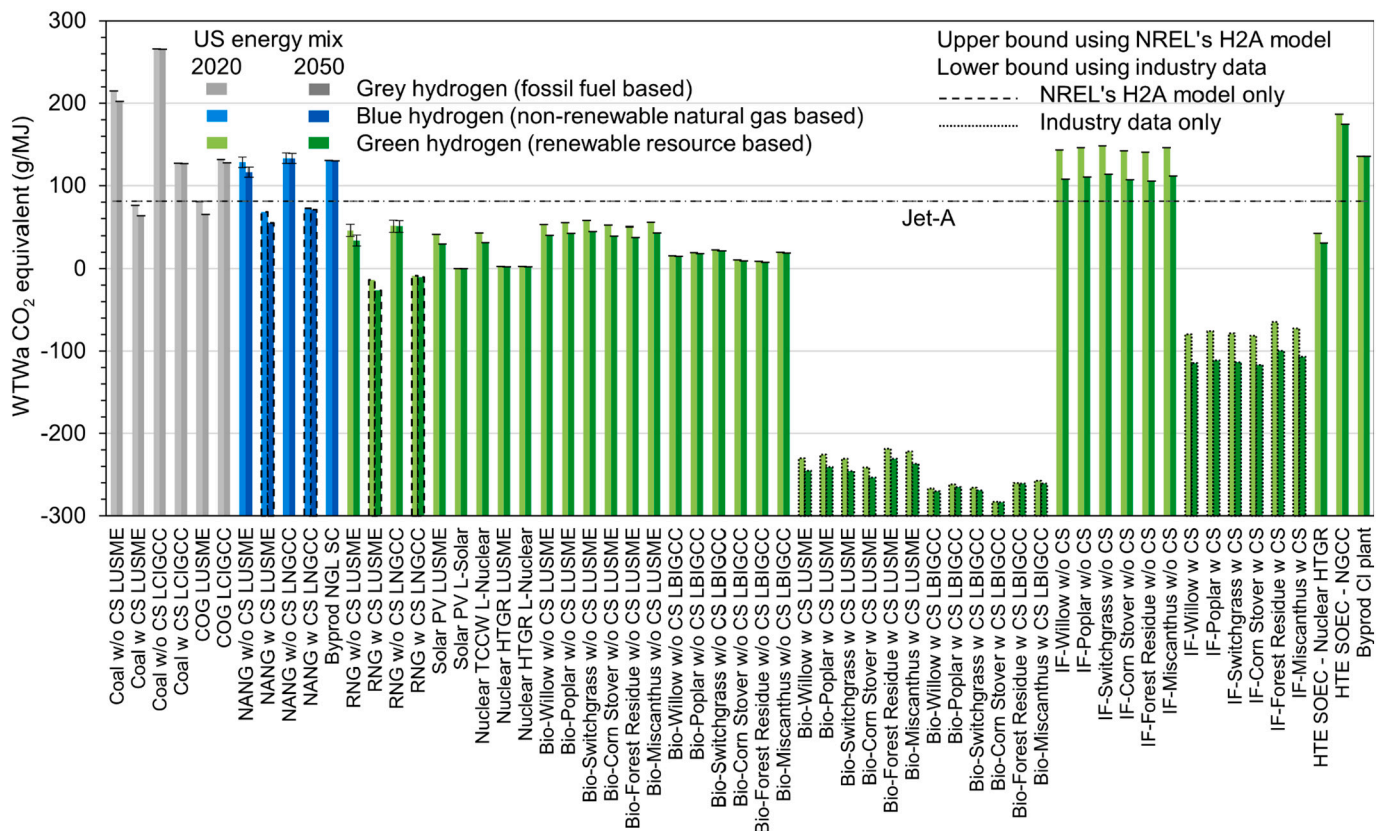


Fig. 2. WTWa comparison of different LH₂ feedstocks and pathways for 2020 and 2050 (with only CO₂ emissions in PTWa phase) [w/o: without; w: with; CS: carbon sequestration; LUSME: liquification using US mix of electricity; COG: coke oven gas; LCIGCC: liquification using electricity from coal integrated gasification combined cycle; NANG: North American natural gas; LNGCC: liquification using power from natural gas combined cycle; NGL: natural gas liquid; SC: steam cracking; RNG: renewable natural gas; L-liquification; PV: photovoltaic; TCCW: thermochemical cracking of water; HTGR: high temperature gas reactor; LBIGCC: liquified using electricity from biomass integrated gasification combined cycle; IF: integrated fermentation; HTE: high temperature electrolysis; SOEC: Solid oxide electrolysis cell; NGCC: natural gas combined cycle].

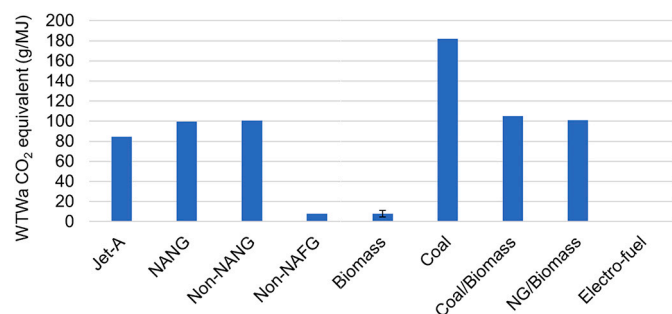


Fig. 3. WTWa CO₂ equivalent emission comparison of different FT feedstocks for 2020 (with only CO₂ emissions in PTWa phase) [NANG: North American natural gas; NAFG: North American flared gas].

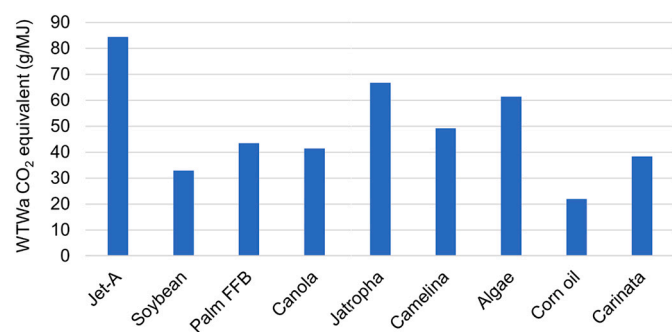


Fig. 4. WTWa CO₂ equivalent emission comparison of different HEFA feedstocks for 2020 (with only CO₂ emissions in PTWa phase).

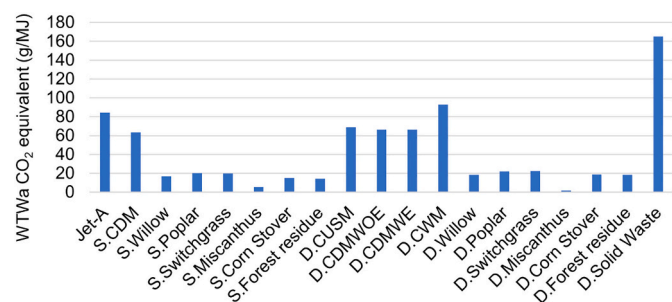


Fig. 5. WTWa CO₂ equivalent emission comparison of different ATJ feedstocks for 2020 (with only CO₂ emissions in PTWa phase) [S; standalone; CDM: corn with dry mill; D: distributed; CUSM: corn US mix; CDMWOE: corn dry mill without extraction; CDMWE: corn dry mill with extraction; CWM: corn wet mill].

considered as the default FT biomass-based feedstock for further analysis.

Similarly, it can be seen from Fig. 4 that Carinata is the only non-food crop that has lowest WTWa CO₂ equivalent emissions of all HEFA feedstocks and is thus considered for further analysis. Ideally, corn oil has the lowest emissions but as discussed in Section 2.1.2 only non-food crops are considered for analysis (due to the social impacts).

Referring to Fig. 5, Miscanthus is the feedstock which provides lowest WTWa CO₂ equivalent emissions in both standalone and distributed ATJ production schemes (S.Miscanthus and D.Miscanthus) and are therefore shortlisted for further analysis. Similarly, it can be observed from Fig. 6 that Miscanthus provides negative WTWa CO₂ equivalent emissions in three STJ production schemes – biological, catalytic with in-situ H₂ plant type, and catalytic with H₂ from biomass gasification plant type (B.Miscanthus, CWHI.Miscanthus and CWHBG.Miscanthus, respectively), and are thus considered for further analysis.

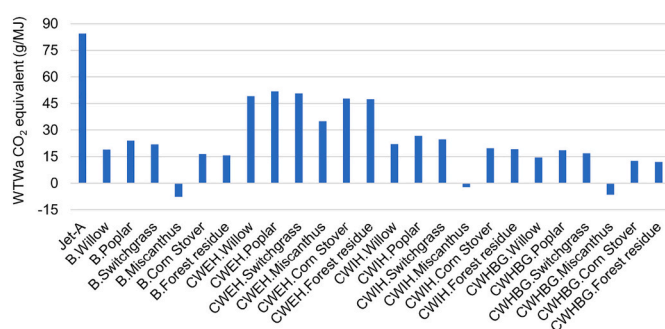


Fig. 6. WTWa CO₂ equivalent emission comparison of different STJ feedstocks for 2020 (with only CO₂ emissions in PTWa phase) [B: biological; CWEH: catalytic with external H₂ plant type; CWHI: catalytic with in-situ H₂ plant type; CWHBG: catalytic with H₂ from biomass gasification plant type].

It is to be noted that the above shortlisting of FT, HEFA, ATJ, and STJ feedstock/pathways (for further analysis) also takes into consideration WTWa CORSIA default values (2021) which are included in Table SI 5 (in SI Section 1). The feedstock/pathways shortlisted from analysis in Figs. 3, 4, 5, and 6 have significantly lesser WTWa than the CORSIA data.

3.1.2.2. Manufacturing emissions sensitivity to identified parameters.

From Section 3.1.1, RNG w CS, Solar PV, Nuclear HTGR, Biomass, and IF (biomass) LH₂ production pathways are found to provide near-zero or sub-zero WTWa CO₂ equivalent emissions. For each of the shortlisted 100 % SPK fuel manufacturing cases in Section 3.1.2.1, the sensitivity of selection of the hydrogen production route (discussed above) and the US energy mix type (year) for manufacturing SPK fuel on the WTWa CO₂ equivalent emissions is analysed.

Fig. 7 provides the WTWa comparison of low-carbon 100 % SPK feedstocks and pathways for 2020 and 2050 US energy mix scenarios using hydrogen produced from less carbon intense scheme (with only CO₂ emissions in PTWa phase). It can be observed that HEFA (Carinata), miscanthus STJ biological production type, and both ATJ distributed and standalone schemes using miscanthus, are sensitive to the hydrogen manufacturing route. This is because the required hydrogen inputs to the production of these 100 % SPK routes greater than that of other fuel production routes (i.e., greater dependency on hydrogen), in GREET. Also, it can be observed that for ATJ distributed and standalone schemes using miscanthus, and miscanthus STJ biological production type, the WTWa CO₂ equivalent emissions increase between 2020 and 2050, opposite to the trend observed for other 100 % SPK cases. This is primarily due to the higher use of fossil fuels via these routes, and the increased need for fossil fuels in the 2050 US energy mix which otherwise has a greater share of renewable energy as discussed in Section 2.1.1. The effect of use of fossil fuels is further detailed in SI Section 4.

3.1.3. Comparative well to wake analysis with non-CO₂ emissions

A comparative analysis of PTWa (CO₂ equivalent) NO_x, H₂O, SO₂ and other emissions (VOC, CO, BC, OC, CH₄ and N₂O) for Jet-A, LH₂ and 100 % SPK is provided in Fig. SI 13. It is observed that by using an LDI combustor, there is a significant drop in PTWa NO_x emissions (CO₂ equivalent) for N + 2 BWB Jet-A (and 100 % SPK) and LH₂ aircraft, compared to present-day LTA aircraft. N + 2 BWB (using LDI combustor) Jet-A, 100 % SPK, and LH₂ aircraft in use phase (PTWa) show 52 %, 54 %, and 96 % reduction in NO_x emissions (CO₂ equivalent), respectively, compared to present-day LTA aircraft.

Fig. 8 shows the WTWa CO₂ equivalent emission comparison for different LH₂ and 100 % SPK feedstock and pathways for 2020 and 2050 US energy mix scenarios with non-CO₂ effects (including contrails). Referring to Fig. 8, the error bars in WTP phase reflect a range of values to accommodate a significant variability (in the life cycle emissions) for any given pathway, especially due to the carbon intensity of the sourced

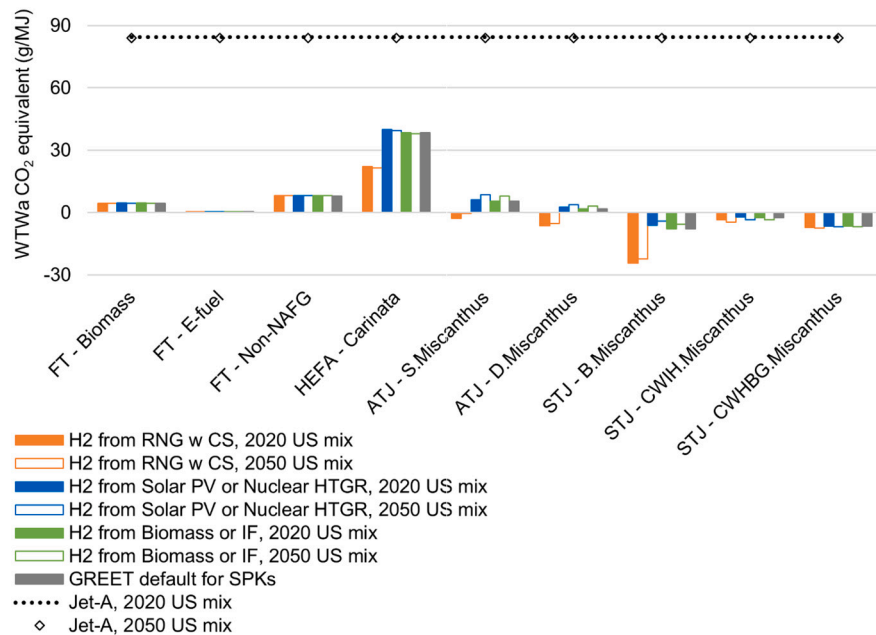


Fig. 7. WTWa CO₂ equivalent emission comparison of low-carbon 100 % SPK feedstocks and pathways for 2020 and 2050 US energy mix scenarios using hydrogen produced from less carbon intense scheme (with only CO₂ emissions in PTWa phase) [FT: Fischer Tropsch; NAFG: North American flared gas; D: distributed; S: standalone; ATJ: alcohol to jet; STJ: sugar to jet; CWIH: catalytic with in-situ H₂ plant type; catalytic with H₂ from biomass gasification plant type; RNG: renewable natural gas; CS: carbon sequestration; PV: photovoltaics; HTGR: high temperature gas reactor; IF: integrated fermentation; SPK: synthetic paraffin kerosene].

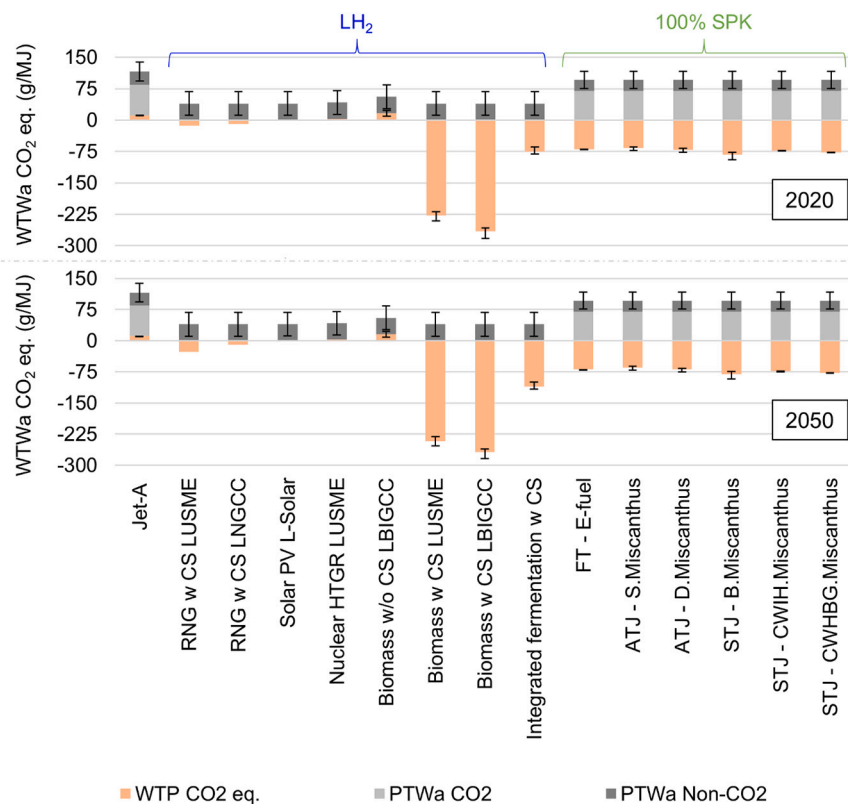


Fig. 8. WTWa CO₂ equivalent emission comparison for different LH₂ and 100 % SPK feedstock and pathways for 2020 and 2050 US energy mix scenarios including non-CO₂ effects [w: with; w/o: without; CS: carbon sequestration; RNG: renewable natural gas; LUSME: liquefaction using US mix of electricity; PV: photovoltaics; HTGR: high temperature gas reactor; LNGCC: liquefaction using power from natural gas combined cycle; LBIGCC: liquefied using electricity from biomass integrated gasification combined cycle; FT: Fischer Tropsch; D: distributed; S: standalone; ATJ: alcohol to jet; STJ: sugar to jet; B: biological; CWIH: catalytic with in-situ H₂ plant type; CWHBG: catalytic with H₂ from biomass gasification plant type].

feedstock. Also, the error bars in PTWa phase reflect the variability due to non-CO₂ emissions. For LH₂ cases, the error bars in WTP show a range of values arising from the use of different biomass feedstocks. Similarly, for 100 % SPK cases, the error bars in WTP phase show a range of values due to the sensitivity because of using hydrogen produced from different low-carbon source for producing 100 % SPK (see Fig. 7 and discussion).

Table 5 provides a summary of Fig. 8 in terms of WTWa GHG emissions (CO₂ equivalent) reduction potential of different LH₂ and 100 % SPK feedstock and pathways for 2020 and 2050. It can be observed from Fig. 8 and Table 5 that all listed feedstock and pathways of producing LH₂ and 100 % SPK could make aviation climate neutral (while considering highest reduction for any case). Particularly, LH₂ fuel can enable net zero or negative WTWa CO₂ equivalent emissions long-range flight of 300 passengers where LH₂ fuel is produced from Biomass w CS LUSME (260.8 % – 266.1 % reduction), Biomass w CS LBIGCC (296.2 % – 302.6 % reduction), and/or integrated fermentation (IF) w CS (96.2 % – 150.7 % reduction), relative to Jet-A. It is to be noted that though the GHG reduction potentials could increase in 2050 (as observed from Table 5), the comparison is made with 2020 numbers.

Additionally, the effect of carbon sequestration on LH₂ WTWa emissions can be observed from Table 5. In 2020, biomass LBIGCC without and with carbon sequestration show 2.8 % – 85.6 % and 296.2 % – 302.6 % reduction in WTWa GHG emissions, which is a significant impact. The use of low carbon fuels and carbon capture which are few of IATA's decarbonization strategies, are observed to be simultaneously employed in the case of Biomass w CS LUSME.

Moreover, it can be observed from Fig. 8 (and Table 5) that on an average the WTWa CO₂ equivalent emissions of 100 % SPK long-range (BWB) flight of 300 passengers can be reduced by 70 % – 85 % if the fuel is produced from Miscanthus (depending on manufacturing route such as ATJ/STJ, standalone/distributed, etc.). This is similar to the observations made by Afonso et al. (Afonso et al., 2023) and Song et al. (Song et al., 2024) that bio-jet fuel can reduce WTWa GHG emissions by up-to 80 % (with non-CO₂ emissions), compared to Jet-A. The authors acknowledge that life cycle emissions for any given fuel and manufacturing pathway could vary significantly, particularly due to the carbon intensity of the feedstock used.

As summarised in Section 1 via a literature review, the non-CO₂ emissions contribute significantly to WTWa GHG emissions. If these effects are ignored in this work, then all the feedstocks/pathways shortlisted for LH₂ fuel can enable a net negative carbon emission (according to Fig. 8). For Jet-A and 100 % SPK cases, the PTWa non-CO₂ emissions (g/MJ) are of similar magnitude as that of PTWa CO₂ effects. Moreover, for LH₂ fuel cases, the contribution of non-CO₂ emissions to

WTWa emissions are significant, though the net WTWa CO₂ equivalent emission is significantly lesser than Jet-A. The use of only advanced technology and low-carbon fuel (like LH₂) enable near-zero WTWa CO₂ equivalent emissions long-range flight, but these are insufficient strategies to reduce the effect of non-CO₂ emissions such as contrails. Similar to Jet-A aircraft, for LH₂ powered aircraft, operational strategies such as avoiding ice-supersaturated regions to prevent contrail formation could be used (Svensson, 2005; Teoh et al., 2020).

The perspective used to select three feedstock and/or pathways for LH₂ fuel identified above only take into consideration the WTWa CO₂ equivalent emissions. However, for commercial aviation, the fuel cost, and the resulting direct operating cost (inclusive of carbon tax exemption) are significant aspects which should be accounted for identifying fuel manufacturing pathways for both LH₂ and 100 % SPK. In this work, cost analysis is not conducted. The accuracy of fuel cost analysis depends primarily on the accuracy of simulation of the fuel manufacturing process, year of simulation, government incentives and market penetration of a fuel, and scale of fuel manufacturing and/or fuel manufacturing process technology readiness level. Additionally, there are fuel cost fluctuations due to externalities. For example: economic uncertainties due to pandemic like COVID-19, instability in Middle Eastern countries, and events such as the 2022 Eastern European conflict directly affect the global energy cost. The aspect of fuel production capacity is addressed in SI Section 3 (Table SI 11). Additionally, the other unintended environmental and social impacts (fossil fuel use, water consumption, air-quality, etc.) are addressed in SI Section 4. Overall, the success of LH₂ powered aviation requires appropriate: airport infrastructure, aircraft design, air-traffic or operations management, safety, fuel supply chain/manufacturing efficiency and capacity to meet the required fuel demand, fuel cost and direct operating cost, and policy.

3.1.4. Future energy demand for long-haul aviation and supply of SAF and green hydrogen

It is to be noted that the production capacities and supply estimates of different feedstocks and pathways explored in this work for SAF and hydrogen, are not available in literature. In this sub-section, a high-level demand and supply aspect is explored as a feasibility check for the alternative fuels considered in this work.

Fig. 9 shows the energy demand forecast for long-haul aviation and supply of SAF. It is to be noted that this analysis (in Fig. 9) assumes that all long-haul aviation will be powered by SAF. It can be observed from Fig. 9 that the supply of SAF in 2050, considering the uncertainties, would satisfy a 3 % CAGR in air-traffic and it might just be enough to support the energy demand for a 5 % CAGR in air traffic. It is to be noted that the present air traffic growth rate is 4 % (Boeing, 2024). Additionally, the SAF supply is expected to be dominated by PtL and advanced feedstocks as per ATAG.

Fig. 10 shows the energy demand forecast for long-haul aviation and supply of green hydrogen. It is to be noted that this analysis (in Fig. 10) assumes that all long-haul aviation will be powered by hydrogen. It can be observed from Fig. 10 that the supply of hydrogen in 2050, considering the uncertainties, would satisfy a 3 % CAGR in air-traffic according to ATAG and McKinsey (MK) green hydrogen supply estimates. However, for a 5 % CAGR in air traffic, ATAG 2050 supply estimates for hydrogen would support the required energy demand but for MK supply estimates the energy demand might be met with at least current trajectory and/or accelerated production capacities (scenarios are part of the uncertainty band). Furthermore, it is extremely important to note that these estimates are global estimates and there would be other sectors competing with aviation for hydrogen.

Considering the high-level analysis in this sub-section, the forecasted SAF and hydrogen supply in 2050 can meet the energy demand of long-haul aviation with the present air traffic CAGR of 4 % if flights are completely powered by either of the two fuels. An increase in air traffic CAGR (to 5 %) and the effect of other competing sectors, necessitates ramping up of production capacities, especially for hydrogen.

Table 5

WTWa GHG emissions (CO₂ equivalent) reduction potential of different LH₂ and 100 % SPK feedstock and pathways for 2020 and 2050.

Manufacturing route	% reduction relative to Jet-A	
	2020	2050
LH₂		
RNG w CS LUSME	41.5–101.7	55.7–111.3
RNG w CS LNGCC	36.3–98.2	38.0–99.3
Solar PV L-Solar	26.8–91.8	26.8–91.8
Nuclear HTGR LUSME	24.1–90.0	24.6–90.3
Biomass w/o CS LBIGCC	2.8–85.6	3.6–86.1
Biomass w CS LUSME	260.8–266.1	274.1–275.6
Biomass w CS LBIGCC	296.2–302.6	297.4–306.2
Integrated fermentation w CS	96.2–150.7	133.6–176.6
100 % SPK		
FT - E-fuel	49.2–95.4	49.3–95.4
ATJ - S.Miscanthus	43.1–97.7	40.5–96.0
ATJ - D.Miscanthus	46.9–100.3	45.7–99.6
STJ - B.Miscanthus	56.4–113.3	54.1–111.8
STJ - CWH.Miscanthus	52.1–92.1	53.4–99.0
STJ - CWHBG.Miscanthus	56.7–100.9	57.0–101.1

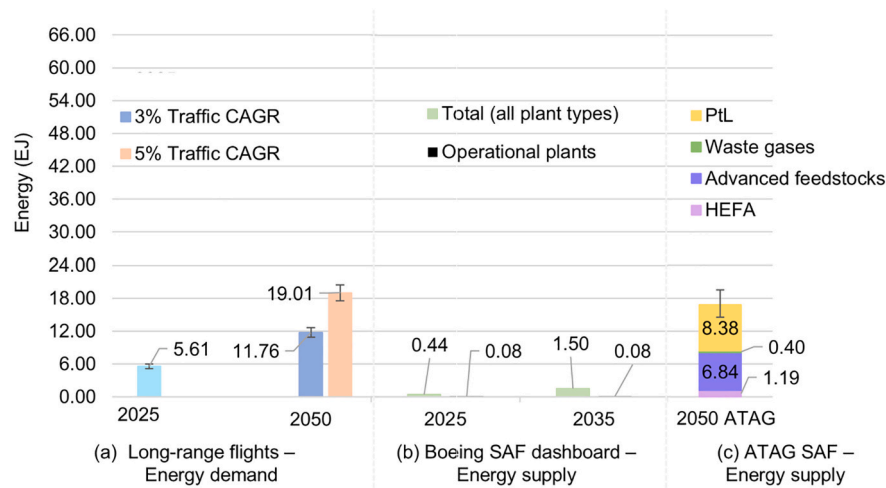


Fig. 9. Energy demand forecast for long-haul aviation and supply of SAF [HEFA: hydro-processed esters and fatty acids; PtL: power to liquid fuel; CAGR: compound annual growth rate].

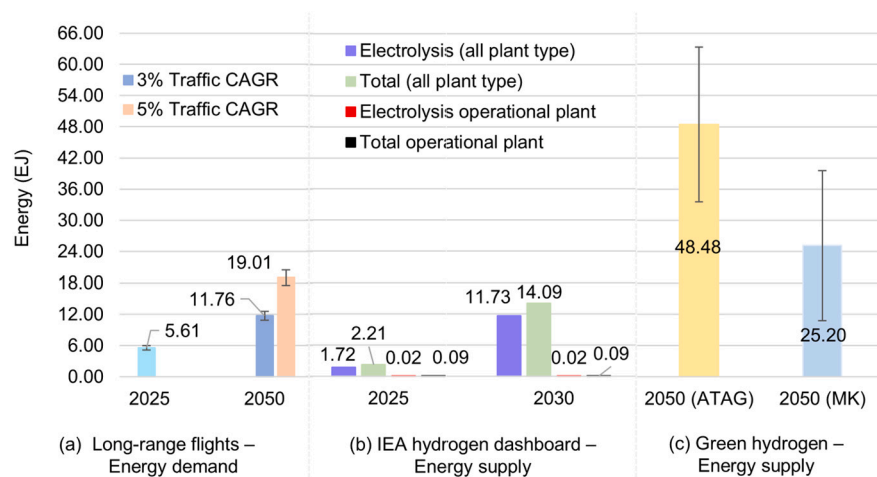


Fig. 10. Energy demand forecast for long-haul aviation and supply of green hydrogen [ATAG: Air Transport Action Group report; MK: McKinsey report; CAGR: compound annual growth rate].

Alternatively, some of the long-haul flights could be powered with SAF and some with hydrogen, such that the energy supply easily meets the required energy demand while the energy demand from other sectors are satisfied simultaneously. In any scenario, to enable a climate neutral long-haul aviation, the production capacities of SAF and hydrogen should be increased than the existing production trajectories.

3.1.5. Limitations of the present work

The fuel WTP emissions database used in this work is primarily based on the GREET model which is US specific. The WTP emissions are sensitive to country's energy mix, availability of raw materials (according to the location) and the number of such locations in the country (determines the transportation emissions), transportation mode used (emissions and efficiency, viz. rail vs. trucks, electricity/battery vs. diesel, etc.), transportation network and its efficiency (direct connectivity between two points, terrain type of the transportation network, etc.), and fuel manufacturing plant efficiency. Additionally, for LH₂ fuel it is assumed that the pump to tank emission is zero. This assumption is simplistic and there could be some emissions associated in terms of energy/emission required to maintain the cryogenic temperature and pressure while filling LH₂ fuel in the aircraft tank, transportation used (depending on the location of the fuel storage at or away from the

airport), and fuel losses while filling LH₂ fuel in aircraft tank. Also, NO_x estimation in this work is based on a simplified (multi-segment) mission where the energy consumption in smaller flight segments is calculated using the modifications to Roskam's fuel fraction. Moreover, the quantification of net non-CO₂ emissions used in this work for use-phase emissions (including contrails) are based on literature. The errors from those studies will add up in the results of this work. Lastly, this work does not conduct cost analysis for aircraft mission powered by different fuels produced from various feedstocks and/or pathways.

4. Conclusions

Liquid hydrogen and 100 % synthetic paraffin kerosene could serve as alternatives to Jet-A for long-haul aviation, provided they are produced from feedstocks and/or processes that ensure zero life cycle well-to-wake emissions. In this work, the life cycle or well-to-wake performance is evaluated for long-range large twin aisle aircraft powered by liquid hydrogen and 100 % synthetic paraffin kerosene or SAF (separately) manufactured from different feedstocks and/or pathways. The GREET model is used for making a database of fuel manufacturing phase emissions for liquid hydrogen and 100 % synthetic paraffin kerosene (bio-jet and power-to-liquid fuel), and the use-phase emissions are

quantified separately in this work. In this work, the sensitivity of hydrogen sourcing to SPK production, and of biomass sourcing for some hydrogen production pathways, are addressed. Similarly, this work addresses the sensitivity of energy mix to alternative fuel production.

After examining over 100 different ways in total for producing liquid hydrogen and 100 % synthetic paraffin kerosene, it is observed that liquid hydrogen fuel can enable net zero or negative well-to-wake CO₂ equivalent emissions for long-range (blended wing body aircraft) flight of 300 passengers where liquid hydrogen fuel is produced from Biomass (liquefaction is done using US electricity mix and manufacturing unit employing carbon sequestration) (260.8 % – 266.1 % reduction), Biomass (liquefaction is done using electricity from biomass integrated gasification combined cycle and manufacturing unit employing carbon sequestration) (296.2 % – 302.6 % reduction), and/or integrated fermentation with carbon sequestration (96.2 % – 150.7 % reduction). This aligns with the decarbonization strategies of the International Air Transport Association of using alternative fuel and carbon capture. Also, it is found that non-CO₂ emissions are significant to the net well-to-wake CO₂ equivalent emissions, and operational strategies need to be employed for reducing contrail formation. It is to be noted that the quantification of non-CO₂ effects (such as contrails) from hydrogen aircraft in literature is relatively at a nascent stage and more research work is required. The well-to-wake CO₂ equivalent emissions of 100 % synthetic paraffin kerosene long-range (blended wing body aircraft) flight of 300 passengers can be reduced (on an average) by 70 % – 85 % (depending on SAF manufacturing pathways), using miscanthus as a feedstock, compared to Jet-A. It is to be noted that there could be a significant variability in the life cycle emissions for any given fuel and the manufacturing pathway, especially due to the carbon intensity of the sourced feedstock.

Based on the high-level analysis in this work, the projected SAF and hydrogen supply in 2050 can meet the energy demand of long-haul aviation with the current air traffic CAGR of 4 %, assuming all flights are powered solely by one of these two fuels. However, if the air traffic CAGR increases to 5 % and other sectors also compete for energy, production capacities, especially for hydrogen, will need to be scaled up. Alternatively, a mix of SAF and hydrogen could be used for long-haul flights, ensuring the energy supply meets the demand while also satisfying the needs of other sectors. In any case, achieving climate-neutral long-haul aviation will require boosting the production capacities of SAF and hydrogen beyond current projections.

The perspective used to select three feedstock and/or pathways for liquid hydrogen fuel identified in this work, only take into consideration the well-to-wake CO₂ equivalent emissions. However, for commercial aviation the fuel cost and the resulting direct operating cost (inclusive of carbon tax exemption) are significant aspects which also needs to be accounted for identifying fuel manufacturing pathways for both liquid hydrogen and 100 % synthetic paraffin kerosene, which are not considered in this work. The fossil-fuel based energy consumption in fuel manufacturing phase should be reduced by increasing the share of renewables in the energy mix and improving the energy efficiency of the fuel manufacturing process and supply chain, for making SAF and/or liquid hydrogen an environmentally and socially benign aviation fuels. This work will inform: (i) research and development investments aimed at increasing production capacities for identified fuel manufacturing processes; (ii) assessments of fuel costs; and (iii) the formulation of aviation policies. Lastly, the success of liquid hydrogen powered aviation requires appropriate airport infrastructure, aircraft design, air-traffic or operations management, safety, and fuel supply chain/manufacturing capacity and energy efficiency, to meet the required fuel demand, fuel cost and direct operating cost, and policy.

CRediT authorship contribution statement

Swapnil S. Jagtap: Writing – review & editing, Writing – original draft, Visualization, Validation, Methodology, Investigation, Formal

analysis, Conceptualization. **Peter R.N. Childs:** Writing – review & editing, Supervision, Methodology. **Marc E.J. Stettler:** Writing – review & editing, Supervision, Methodology, Conceptualization.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

The research conducted in this work is completely funded by the President's PhD Scholarship at Imperial College London. The authors are thankful to all donors who contribute to these funds and to Imperial College London for its support.

Appendix A. Supplementary data

Supplementary data to this article can be found online at <https://doi.org/10.1016/j.spc.2025.04.008>.

References

- Afonso, F., Sohst, M., Diogo, C.M.A., Rodrigues, S.S., Ferreira, A., Ribeiro, I., Marques, R., Rego, F.F.C., Sohoul, A., Portugal-Pereira, J., Policarpo, H., Soares, B., Ferreira, B., Fernandes, E.C., Lau, F., Suleman, A., 2023. Strategies towards a more sustainable aviation: a systematic review. *Prog. Aerosp. Sci.* 137, 100878. <https://doi.org/10.1016/J.PAEROSCI.2022.100878>.
- Alsamri, K., De la Cruz, J.J., Emmanouilidi, M., Huynh, J.L., Brouwer, J., 2023. Methodology to Assess Emissions and Performance Trade-offs for a Retrofitted Solid Oxide Fuel Cell Hybrid and Hydrogen Powered Aircraft. <https://doi.org/10.2514/6.2023-1954>.
- Alsamri, K., Cruz, J.D. la, Emmanouilidi, M., Huynh, J., Brouwer, J., 2024. Methodology for Assessing Retrofitted Hydrogen Combustion and Fuel Cell Aircraft Environmental Impacts, pp. 1–16. <https://doi.org/10.2514/1.B39405>.
- ANL, 2021a. GREET 2021. URL, Argonne Natl. Lab. <https://greet.es.anl.gov/> (WWW Document).
- ANL, 2021b. GREET 2021 Excel model. URL. <https://greet.anl.gov/files/greet-2021rev1> (WWW Document).
- ANL, 2024. GREET. URL. <https://greet.anl.gov/index.php> (WWW Document).
- ANL. Argonne GREET publications, Argonne Natl. Lab. . URL. <https://greet.es.anl.gov/publications>. (Accessed 8 June 2022) (WWW Document, n.d.).
- Ansell, P.J., 2023. Review of sustainable energy carriers for aviation: benefits, challenges, and future viability. *Prog. Aerosp. Sci.* 141, 100919. <https://doi.org/10.1016/J.PAEROSCI.2023.100919>.
- Bicer, Y., Dincer, I., 2017. Life cycle evaluation of hydrogen and other potential fuels for aircrafts. *Int. J. Hydrog. Energy* 42, 10722–10738. <https://doi.org/10.1016/j.ijhydene.2016.12.119>.
- Boeing, 2007. 777 Flight Crew Training Manual Qatar Airways. URL. <http://virtaviaonline/wp-content/uploads/wpforo/attachments/1/975-B777-FCTM.pdf>. (Accessed 16 June 2022) (WWW Document).
- Boeing, 2024. Commercial market outlook 2024–2043. URL. <https://www.boeing.com/commercial/market/commercial-market-outlook#overview>. (Accessed 2 October 2024) (WWW Document).
- Braun, M., Grimme, W., Oesingmann, K., 2024. Pathway to net zero: reviewing sustainable aviation fuels, environmental impacts and pricing. *J. Air Transp. Manag.* 117, 102580. <https://doi.org/10.1016/J.JAIRTRAMAN.2024.102580>.
- Cabrera, E., de Sousa, J.M.M., 2022. Use of sustainable fuels in aviation—a review. *Energies* 15, 2440. <https://doi.org/10.3390/EN15072440>.
- Chan, J.L., Sun, Y., Smith, H., 2024. Conceptual designs of blended wing body aircraft for the application of alternative fuels. In: AIAA Aviation Forum and Ascend 2024. <https://doi.org/10.2514/6.2024-3989>.
- Chen, L., Gao, M., Zhu, M., Zhong, S., Teng, Y., Zheng, Y., Liu, Y., Ullah, N., 2024a. Towards precision aviation emission modeling: a hybrid paradigm of convolutional neural networks and semi-empirical formulas for full flight phase gas pollutant indices. *Sci. Total Environ.* 957, 177414. <https://doi.org/10.1016/J.SCITOTENV.2024.177414>.
- Chen, L., Zhang, Q., Zhu, M., Li, G., Chang, L., Xu, Z., Zhang, H., Wang, Y., Zheng, Y., Zhong, S., Pan, K., Zhao, Y., Gao, M., Zhang, B., 2024b. A convolutional neural network prediction model for aviation nitrogen oxides emissions throughout all flight phases. *Sci. Total Environ.* 929, 172432. <https://doi.org/10.1016/J.SCITOTENV.2024.172432>.
- Chester, M.V., Horvath, A., 2009. Environmental assessment of passenger transportation should include infrastructure and supply chains. *Environ. Res. Lett.* 4, 024008. <https://doi.org/10.1088/1748-9326/4/2/024008>.
- De Jong, S., Antonissen, K., Hoefnagels, R., Lonza, L., Wang, M., Faaij, A., Junginger, M., 2017. Life-cycle analysis of greenhouse gas emissions from renewable jet fuel

- production. *Biotechnol. Biofuels* 10, 1–18. <https://doi.org/10.1186/S13068-017-0739-7/TABLES/4>.
- Delbecq, S., Planès, T., Salgas, A., Pollet, F., Budinger, V., 2024. Climate and Energy Impact Analysis of Electric, Hybrid-electric and Hydrogen Aircraft in Prospective Scenarios for Air Transport. <https://doi.org/10.34849/pjc3-gh33fi> (WWW Document).
- Dray, L., Schäfer, A.W., Grobler, C., Falter, C., Allroggen, F., Stettler, M.E.J., Barrett, S.R.H., 2022. Cost and emissions pathways towards net-zero climate impacts in aviation. *Nat. Clim. Chang.* 1210 (12), 956–962. <https://doi.org/10.1038/s41558-022-01485-4>.
- Energy Information Administration, 2021. Electricity, Energy Inf. Adm. USA. https://www.eia.gov/outlooks/aeo/pdf/04AEO2021_Electricity.pdf. (Accessed 8 June 2022) (WWW Document).
- Fantuzzi, A., Saenz, Paola A., Cavazos, N.M., High, M., Bui, M., Rutherford, A. William, von H., I., 2023. Low-carbon fuels for aviation. In: *Brief. Pap. No 9. Inst. Mol. Sci. Eng.* <https://doi.org/10.25561/101834> (WWW Document).
- Ge, F., Yu, Z., Li, Y., Zhu, M., Zhang, B., Zhang, Q., Harrison, R.M., Chen, L., 2022. Predicting aviation non-volatile particulate matter emissions at cruise via convolutional neural network. *Sci. Total Environ.* 850, 158089. <https://doi.org/10.1016/J.SCITOTENV.2022.158089>.
- German Environment Agency, 2016. https://www.umweltbundesamt.de/sites/default/files/medien/377/publikationen/161005_uba_hintergrund_ptl_barrierefrei.pdf.
- Graver, B., Rutherford, D., Zheng, S., 2020. CO₂ emissions from commercial aviation: 2013, 2018, and 2019 - International Council on Clean Transportation. URL. <https://theicct.org/publication/co2-emissions-from-commercial-aviation-2013-2018-and-2019/>. (Accessed 28 November 2024) (WWW Document).
- Grim, R.G., Ravikumar, D., Tan, E.C.D., Huang, Z., Ferrell, J.R., Resch, M., Li, Z., Mevawala, C., Phillips, S.D., Snowden-Swan, L., Tao, L., Schaidle, J.A., 2022. Electrifying the production of sustainable aviation fuel: the risks, economics, and environmental benefits of emerging pathways including CO₂. *Energy Environ. Sci.* 15, 4798–4812. <https://doi.org/10.1039/D2EE02439J>.
- Airbus A350-800 - price, specs, photo gallery, history - Aero Corner. URL. <https://aerocorner.com/aircraft/airbus-a350-xwb/>. (Accessed 16 June 2022) (WWW Document, n.d.).
- Boeing Cascade Climate Impact Model. URL. <https://app.cascade.boeing.com/>. (Accessed 4 August 2024) (WWW Document, n.d.).
- Waypoint 2050 2nd edition: September 2021 (full report and summary) | ATAG. URL. <https://atag.org/resources/waypoint-2050-2nd-edition-september-2021>. (Accessed 28 November 2024) (WWW Document, n.d.).
- Boeing SAF Dashboard - Boeing Cascade Climate Impact Model. URL. <https://cascade.boeing.com/perspectives/boeing-saf-dashboard/>. (Accessed 28 November 2024) (WWW Document, n.d.).
- What do you know about take-off speed? V1, Vr, and V2. URL. <https://www.aviationnepal.com/what-do-you-know-about-take-off-speed-v1-vr-and-v2/>. (Accessed 16 June 2022) (WWW Document, n.d.).
- Hydrogen production projects interactive map – Data Tools - IEA. URL. <https://www.iea.org/data-and-statistics/data-tools/hydrogen-production-projects-interactive-map>. (Accessed 28 November 2024) (WWW Document, n.d.).
- Global Energy Perspective 2023: hydrogen outlook | McKinsey. URL. <https://www.mckinsey.com/industries/oil-and-gas/our-insights/global-energy-perspective-2023-hydrogen-outlook>. (Accessed 28 November 2024) (WWW Document, n.d.).
- AIRBUS A350-900 - SKYbrary Aviation Safety. URL. <https://www.skybrary.aero/index.php/A359>. (Accessed 21 January 2021) (WWW Document, n.d.).
- Hupe, J., 2020. Setting the scene-aviation and climate change. In: *ICAO Aviation Green Recovery Seminar*. URL. [https://www.icao.int/Meetings/GreenRecoverySeminar/Documents/1.1 ICAO AGR - Setting the scene.pdf](https://www.icao.int/Meetings/GreenRecoverySeminar/Documents/1.1%20ICAO%20AGR%20-%20Setting%20the%20scene.pdf). (Accessed 5 June 2021) (WWW Document).
- IATA, 2024. IATA - Fly Net Zero. URL. <https://www.iata.org/en/programs/sustainability/flynetzero/>. (Accessed 2 October 2024) (WWW Document).
- International Air Transport Association, 2021. Industry Statistics Fact Sheet 2024. URL. <https://www.iata.org/en/iata-repository/pressroom/fact-sheets/industry-statistics/>. (Accessed 2 October 2024) (WWW Document).
- International Civil Aviation Organization, 2021. CORSIA default life cycle emissions values for CORSIA eligible fuels. URL. [https://www.icao.int/environmental-protection/CORSIA/Documents/ICAO document 06 - Default Life Cycle Emissions - March 2021.pdf](https://www.icao.int/environmental-protection/CORSIA/Documents/ICAO%20document%2006-%20Default%20Life%20Cycle%20Emissions-%20March%202021.pdf). (Accessed 31 May 2022) (WWW Document).
- Jagtap, S.S., 2016. Sustainability assessment of hydro-processed renewable jet fuel from algae from market-entry year 2020: use in passenger aircrafts. In: *16th AIAA Aviation Technology, Integration, and Operations Conference*. American Institute of Aeronautics and Astronautics, Reston, Virginia. <https://doi.org/10.2514/6.2016-4367>.
- Jagtap, S.S., 2019a. Assessment of feedstocks for blended alcohol-to-jet fuel manufacturing from standalone and distributed scheme for sustainable aviation. In: *AIAA Propulsion and Energy 2019 Forum*. American Institute of Aeronautics and Astronautics, Indianapolis, Indiana. <https://doi.org/10.2514/6.2019-3887>.
- Jagtap, S.S., 2019b. Comparative assessment of manufacturing setups for blended sugar-to-aviation fuel production from non-food feedstocks for green aviation. In: *AIAA Propulsion and Energy 2019 Forum*. American Institute of Aeronautics and Astronautics, Indianapolis, Indiana. <https://doi.org/10.2514/6.2019-4332>.
- Jagtap, S.S., 2019c. Evaluation of blended Fischer-Tropsch jet fuel feedstocks for minimizing human and environmental health impacts of aviation. In: *AIAA Propulsion and Energy 2019 Forum*. American Institute of Aeronautics and Astronautics, Indianapolis, Indiana. <https://doi.org/10.2514/6.2019-4412>.
- Jagtap, S.S., 2019d. Non-food feedstocks comparison for renewable aviation fuel production towards environmentally and socially responsible aviation. In: *2019 AIAA Propulsion & Energy Forum*. American Institute of Aeronautics and Astronautics, Indianapolis.
- Jagtap, S.S., Childs, P.R.N., Stettler, M.E.J., 2023. Energy performance evaluation of alternative energy vectors for subsonic long-range tube-wing aircraft. *Transp. Res. Part D Transp. Environ.* 115, 103588. <https://doi.org/10.1016/J.TRD.2022.103588>.
- Jagtap, S.S., Childs, P.R.N., Stettler, M.E.J., 2024a. Performance sensitivity of subsonic liquid hydrogen long-range tube-wing aircraft to technology developments. *Int. J. Hydrog. Energy* 50, 820–833. <https://doi.org/10.1016/J.IJHYDENE.2023.07.297>.
- Jagtap, S.S., Childs, P.R.N., Stettler, M.E.J., 2024b. Conceptual design-optimisation of a future hydrogen-powered ultrahigh bypass ratio geared turbofan engine. *Int. J. Hydrog. Energy* 95, 317–328. <https://doi.org/10.1016/J.IJHYDENE.2024.10.329>.
- Jagtap, S.S., Childs, P.R.N., Stettler, M.E.J., 2024c. Conceptual design-optimisation of a subsonic hydrogen-powered long-range blended-wing-body aircraft. *Int. J. Hydrog. Energy* 96, 639–651. <https://doi.org/10.1016/J.IJHYDENE.2024.11.331>.
- Job, S., Campbell, M., Hall, B., Hamadache, Z., Kumar, N., 2022. *Sustainability Report - The Lifecycle Impact of Hydrogen-powered Aircraft*.
- Keiser, D., Schnoor, L.H., Pukpes, B., Freitag, M., 2023. Life cycle assessment in aviation: a systematic literature review of applications, methodological approaches and challenges. *J. Air Transp. Manag.* 110, 102418. <https://doi.org/10.1016/J.JAIRTRAMAN.2023.102418>.
- Klenner, J., Lund, M.T., Muri, H., Strømman, A.H., 2024. Combining fleetwide AviTeam aviation emission modeling with LCA perspectives for an alternative fuel impact assessment. *Environ. Sci. Technol.* 58, 9135–9146. https://doi.org/10.1021/ACS.EST.3C08592/SUPPL_FILE/ES3C08592_SI_004.XLSX.
- Kolosz, B.W., Luo, Y., Xu, B., Maroto-Valer, M.M., Andresen, J.M., 2020. Life cycle environmental analysis of 'drop in' alternative aviation fuels: a review. *Sustain. Energy Fuels* 4, 3229–3263. <https://doi.org/10.1039/C9SE00788A>.
- Koroneos, C., Drompros, A., Roumbas, G., Moussopoulos, N., 2005. Advantages of the use of hydrogen fuel as compared to kerosene. *Resour. Conserv. Recycl.* 44, 99–113. <https://doi.org/10.1016/J.RESCONREC.2004.09.004>.
- Kossarev, K., Scholz, A.E., Egerer, P., Hornung, M., 2022. Comparison of environmental life cycle impact assessment methods for future aircraft designs. In: *AIAA Aviat. 2022 Forum*. <https://doi.org/10.2514/6.2022-3659>.
- Kossarev, K., Scholz, A.E., Hornung, M., 2023. Comparative environmental life cycle assessment and operating cost analysis of long-range hydrogen and biofuel fueled transport aircraft. *CEAS Aeronaut. J.* 14, 3–28. <https://doi.org/10.1007/S13272-022-00627-W/FIGURES/22>.
- Lau, J.I.C., Wang, Y.S., Ang, T., Seo, J.C.F., Khadaroo, S.N.B.A., Chew, J.J., Ng Kay Lup, A., Sunarso, J., 2024. Emerging technologies, policies and challenges toward implementing sustainable aviation fuel (SAF). *Biomass Bioenergy* 186, 107277. <https://doi.org/10.1016/J.BIOMBIOE.2024.107277>.
- Lee, D.S., 2018. The current state of scientific understanding of the non-CO₂ effects of aviation on climate. URL. https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/813342/non-CO2-effects-report.pdf. (Accessed 2 January 2020) (WWW Document).
- Lee, D.S., Fahey, D.W., Skowron, A., Allen, M.R., Burkhardt, U., Chen, Q., Doherty, S.J., Freeman, S., Forster, P.M., Fuglestad, J., Gettelman, A., De León, R.R., Lim, L.L., Lund, M.T., Millar, R.J., Owen, B., Penner, J.E., Pitari, G., Prather, M.J., Sausen, R., Wilcox, L.J., 2021. The contribution of global aviation to anthropogenic climate forcing for 2000 to 2018. *Atmos. Environ.* 244, 117834. <https://doi.org/10.1016/J.ATMOSENV.2020.117834>.
- Lee, D.S., Allen, M.R., Cumpsty, N., Owen, B., Shine, K.P., Skowron, A., 2023. Uncertainties in mitigating aviation non-CO₂ emissions for climate and air quality using hydrocarbon fuels. *Environ. Sci. Atmos.* 3, 1693–1740. <https://doi.org/10.1039/D3EA00091E>.
- Marek, C., Smith, T., Kundu, K., 2005. Low emission hydrogen combustors for gas turbines using lean direct injection. In: *41st AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibit*. American Institute of Aeronautics and Astronautics, Reston, Virginia. <https://doi.org/10.2514/6.2005-3776>.
- Mazur, K., Saleh, M., Hornung, M., 2024. Integrating life cycle assessment in conceptual aircraft design: a comparative tool analysis. *Aerospace* 11, 101. <https://doi.org/10.3390/AEROSPACE11010101>.
- Micheli, M., Moore, D., Bach, V., Finkbeiner, M., 2022. Life-cycle assessment of power-to-liquid kerosene produced from renewable electricity and CO₂ from direct air capture in Germany. *Sustain* 14, 10658. <https://doi.org/10.3390/SU141710658/S1>.
- Miller, T., 2021. *Environmental Assessments of Capital-intensive Product Systems*. Yale Grad. Sch. Arts Sci. Diss.
- Miller, T.R., Chertow, M., Hertwich, E., 2023. Liquid hydrogen: a mirage or potent solution for aviation's climate woes? *Environ. Sci. Technol.* 57, 9627–9638. https://doi.org/10.1021/ACS.EST.2C06286/ASSET/IMAGES/LARGE/ES2C06286_0006.JPEG.
- Mukhopadhyaya, J., Rutherford, D., 2022. Performance analysis of evolutionary hydrogen-powered aircraft. URL. <https://theicct.org/publication/aviation-global-evo-hydrogen-aircraft-jan22/>. (Accessed 4 June 2022) (WWW Document).
- Papantoni, V., Linke, F., Dahlmann, K., Kühlen, M., Silberhorn, D., Brand, U., Vogt, T., 2022. Life cycle assessment of power-to-liquid for aviation: a case study of a passenger aircraft. In: *10th International Conference on Life Cycle Management, LCM 2021*. <https://doi.org/10.1051/e3sconf/202234902003>.
- Pavlenko, Nikita, Searle, Stephanie, 2021. Assessing the sustainability implications of alternative aviation fuels. URL. <https://theicct.org/publication/assessing-the-sustainability-implications-of-alternative-aviation-fuels/>. (Accessed 9 June 2022) (WWW Document).
- Pavlenko, N., Searle, S., Christensen, A. The cost of supporting alternative jet fuels in the European Union, *Int. Counc. Clean Transp.*. URL. <https://theicct.org/sites/default/>

- files/publications/Alternative_jet_fuels_cost_EU_20190320.pdf. (Accessed 13 July 2019) (WWW Document, n.d.).
- Penke, C., Falter, C., Batteiger, V., 2021. Pathways and environmental assessment for the introduction of renewable hydrogen into the aviation sector. *Sustain. Prod. Life Cycle Eng. Manag.* 41–52. https://doi.org/10.1007/978-3-030-50519-6_4.
- Pinheiro Melo, S., Barke, A., Cerdas, F., Thies, C., Mennenga, M., Spengler, T.S., Herrmann, C., 2020. Sustainability assessment and engineering of emerging aircraft technologies—challenges, methods and tools. *Sustainability* 12, 5663. <https://doi.org/10.3390/su12145663>.
- Prashanth, P., Elmourad, J., Grobler, C., Isaacs, S., Zahid, S.S., Abel, J., Falter, C., Fritz, T., Allroggen, F., Sabnis, J.S., Eastham, S.D., Speth, R.L., Barrett, S.R.H., 2024. Near-zero environmental impact aircraft. *Sustain. Energy Fuels*. <https://doi.org/10.1039/D4SE00419A>.
- Proesmans, P., Vos, R., 2022. Comparison of future aviation fuels to minimize the climate impact of commercial aircraft. In: *AIAA Aviat. 2022 Forum*. <https://doi.org/10.2514/6.2022-3288>.
- Proesmans, P., Vos, R., 2024. Hydrogen, medium-range airplane design optimization for minimal global warming impact. *CEAS Aeronaut. J.* 1–26. <https://doi.org/10.1007/S13272-024-00734-W/FIGURES/16>.
- Prussi, M., Lee, U., Wang, M., Malina, R., Valin, H., Taheripour, F., Velarde, C., Staples, M.D., Lonza, L., Hileman, J.I., 2021. CORSIA: the first internationally adopted approach to calculate life-cycle GHG emissions for aviation fuels. *Renew. Sustain. Energy Rev.* 150, 111398. <https://doi.org/10.1016/J.RSER.2021.111398>.
- Quante, G., Bullerdiek, N., Bube, S., Neuling, U., Kaltschmitt, M., 2023. Renewable fuel options for aviation – a system-wide comparison of drop-in and non drop-in fuel options. *Fuel* 333, 126269. <https://doi.org/10.1016/J.FUEL.2022.126269>.
- Ratner, S.V., Yuri, C., Hien, N.H., 2019. Prospects of transition of air transportation to clean fuels: economic and environmental management aspects. *Int. Energy J.* 19.
- Saad, D.M., Terlouw, T., Sacchi, R., Bauer, C., 2024. Life cycle economic and environmental assessment of producing synthetic jet fuel using CO₂/biomass feedstocks. *Environ. Sci. Technol.* 58, 9158–9174. https://doi.org/10.1021/ACS.EST.4C01578/SUPPL_FILE/ES4C01578_SI_001.PDF.
- Sacchi, R., Becattini, V., Gabrielli, P., Cox, B., Dirnmaier, A., Bauer, C., Mazzotti, M., 2023. How to make climate-neutral aviation fly. *Nat. Commun.* 141 (14), 1–17. <https://doi.org/10.1038/s41467-023-39749-y>.
- Schaefer, M., Bartosch, S., 2013. Overview on fuel flow correlation methods for the calculation of NO_x, CO and HC emissions and their implementation into aircraft performance software. URL, DLR. https://www.researchgate.net/publication/271210746_Overview_on_fuel_flow_correlation_methods_for_the_calculation_of_NOx_CO_and_HC_emissions_and_their_implementation_into_aircraft_performance_software. (Accessed 14 June 2022) (WWW Document).
- Schmidt, P., Batteiger, V., Roth, A., Weindorf, W., Raksha, T., 2018. Power-to-liquids as renewable fuel option for aviation: a review. *Chemie Ing. Tech.* 90, 127–140. <https://doi.org/10.1002/cite.201700129>.
- Siddiqui, O., Dincer, I., 2021. A comparative life cycle assessment of clean aviation fuels. *Energy* 234, 121126. <https://doi.org/10.1016/J.ENERGY.2021.121126>.
- Song, Z., Li, Z., Liu, Z., 2024. Comparison of emission properties of sustainable aviation fuels and conventional aviation fuels: a review. *Appl. Sci.* 14, 5484. <https://doi.org/10.3390/AP14135484>.
- Su-ungkavatin, P., Tiruta-Barna, L., Hamelin, L., 2023a. Methodological framework for Life Cycle Assessment of sustainable aviation (SA) systems. *Sci. Total Environ.* 885, 163881. <https://doi.org/10.1016/J.SCITOTENV.2023.163881>.
- Su-ungkavatin, P., Tiruta-Barna, L., Hamelin, L., 2023b. Biofuels, electrofuels, electric or hydrogen?: a review of current and emerging sustainable aviation systems. *Prog. Energy Combust. Sci.* 96, 101073. <https://doi.org/10.1016/J.PECS.2023.101073>.
- Svensson, F., 2005. *Potential of Reducing the Environmental Impact of Civil Subsonic Aviation by Using Liquid Hydrogen*. Cranfield University.
- Teoh, R., Schumann, U., Majumdar, A., Stettler, M.E.J., 2020. Mitigating the climate forcing of aircraft contrails by small-scale diversions and technology adoption. *Environ. Sci. Technol.* 54, 2941–2950. <https://doi.org/10.1021/acs.est.9b05608>.
- Teoh, R., Engberg, Z., Shapiro, M., Dray, L., Stettler, M.E.J., 2024. The high-resolution Global Aviation emissions Inventory based on ADS-B (GAIA) for 2019–2021. *Atmos. Chem. Phys.* 24, 725–744. <https://doi.org/10.5194/ACP-24-725-2024>.
- Tveitan, S., 2020. *Life Cycle Assessment of Hydrogen Fuel in Aviation*. University of Bergen.
- van der Sman, Elisabeth, Peerlings, Bram, Kos, Johan, Lieshout, Rogier, Boonekamp, Thijs, 2021. Destination 2050 – a route to net zero European aviation. URL, SEO Economisch Onderzoek. NLR – R. Netherlands Aeronaut. Cent. <https://www.seo.nl/en/publications/destination-2050-a-route-to-net-zero-european-aviation/>. (Accessed 31 May 2022) (WWW Document).
- Vanlandingham, A., 2024. *Environmental and Economic Impact of Transport Aircraft Using Sustainable Aviation Fuel or Liquid-hydrogen as Alternative Fuels*. Penn State.
- VanLandingham, A., Hall, D.K., 2023. Conceptual Design Optimization of Liquid-hydrogen-fueled Transport Aircraft for Environmental and Economic Performance. <https://doi.org/10.2514/6.2023-3228>.
- Wei, H., Liu, W., Chen, X., Yang, Q., Li, J., Chen, H., 2019. Renewable bio-jet fuel production for aviation: a review. *Fuel*. <https://doi.org/10.1016/j.fuel.2019.06.007>.
- World Economic Forum, 2022. *Target True Zero Unlocking Sustainable Battery and Hydrogen-powered Flight - Insight Report*.
- Zhao, Y., Zhu, M., Zhou, L., Gao, M., Xu, Z., Zhong, S., Pan, K., Chen, L., 2024. Evaluating high-resolution aviation emissions using real-time flight data. *Sci. Total Environ.* 951, 175429. <https://doi.org/10.1016/J.SCITOTENV.2024.175429>.