Analysis of flow processes in fractured chalk under pumped and ambient conditions

A. P. Butler[1], S. A. Mathias[1], A. J. Gallagher[2], D. W. Peach[2], and A. T. Williams[2]

[1]Department of Civil and Environmental Engineering, Imperial College London, London SW7 2AZ, UK

[2]British Geological Survey, Wallingford OX10 8BB, UK

Corresponding email address: simon.mathias@imperial.ac.uk

Key words: dilution test, flowmeter, fractured rocks, hydraulic testing, pumping test

Paper submitted to Hydrogeology Journal 29/04/2008

Abstract

This paper describes an integrated set of different measurements that has been used to study the behavior of groundwater in an observation well in a fractured rock formation, the UK Chalk, under pumped and ambient conditions. Under pumped conditions the response of the open borehole was relatively straightforward with flow mainly concentrated along four discrete flow horizons. Furthermore, excellent correspondence was observed between the three methods of borehole flow velocity measurement: impeller flowmeter, heat-pulse flowmeter and dilution testing. Under ambient conditions the system appeared more complicated. Specifically, in the upper half of the borehole the impeller flowmeter exhibited substantial downward flow, the heat-pulse flowmeter exhibited almost negligible upward flow whilst dilution testing indicated significant dilution. It was concluded that this was due to cross-flow occurring over the upper 29 m. Analysis of drawdown data, recovery data and a Drost analysis of the ambient cross-flow data yielded aquifer transmissivity estimates of 2049 m^2d^{-1}, 2928 m^2d^{-1} and > 4388 m^2d^{-1} respectively. The discrepancy between the drawdown and recovery estimates was attributed to non-linear head-losses associated with turbulence and inertial effects. The difference between the pumping test and Drost results was explained by the flow during the pumping test bypassing this aforementioned 29 m region of rock.

Introduction

Chalk aquifers represent some of the most important groundwater resources in the UK. Consequently, great effort is incurred in developing catchment scale groundwater models of key water resources sites (see ENTEC, 2003 and references therein). These models routinely use parameters obtained from pumping test analysis (MacDonald and Allen, 2001). However, it is often found that when attempting to simulate the observed ambient (i.e. unpumped) groundwater response, a level of calibration is required (ENTEC, 2003; Rushton et al., 1989). This adjustment of parameter values is due to a range of problems including measurement error and model uncertainty (Liu and Gupta, 2007). However, another problem, not often discussed, is the extent that aquifer parameters derived under locally perturbed (i.e. pumped) conditions are suitable for applying to models that represent the system in the ambient state.

As part of the UK Natural Environment Research Council (NERC) thematic programme on LOwland CAtchment Research (LOCAR) (Wheater and Peach, 2004) three 100 m deep observation boreholes (PL10A, PL10B, PL10E) were placed around an Environment Agency river augmentation abstraction well at Bottom Barn (BBA) situated in the Berkshire Chalk aquifer, UK (see Figure 1 and Williams et al., 2006). Effort was focused on the characterization of PL10A, which benefited from extensive geophysical logging (caliper, gamma, temperature, televiewer etc.), packer testing, flow logging (using impeller and heat-pulse flow meters) and dilution testing. Of particular interest is that temperature logging, flow logging and dilution testing were undertaken under ambient conditions and again when the BBA (situated 32 m away) was pumping at 5770 m^3d^{-1}. In what follows it is shown that the pumping of BBA fundamentally changed the observed flow processes within PL10A raising a serious question concerning the application of results obtained from pumping tests in fractured rock aquifers such as the Chalk.

Lithostratigraphy

Traditionally, the Berkshire Chalk outcrop has been subdivided into the Upper, Middle and Lower Chalk formations (White, 1907). At a meeting of the Geological Society Stratigraphy Commission at the British Geological Survey (BGS) in 1999, a broadly agreed revised Chalk Group stratigraphy was adopted (Rawson et al., 2001), which was based on the more sophisticated lithostratigraphical classification applied by Mortimore (1986) and Robinson

(1986). One of the useful markers for applying the new lithostratigraphical classification is a three-metre band, near the base of the Lewes Nodular Chalk (the base of the former Upper Chalk), known as the Chalk Rock (Schurch and Buckley, 2002; Woods and Adiss, 2004). This is because the phosphatized and glauconitized chalk pebble intraclasts, particularly common in the Chalk Rock, give rise to a significant increase in gamma-ray activity (Schurch and Buckley, 2002). Figure 2b shows a gamma-ray log of borehole PL10A where such a gamma-ray peak is present at 27 mAOD.

Following Schurch and Buckley (2002) and Woods and Adiss (2004), the Lewes Nodular Chalk formation was assumed to be around 20 m thick with its base located at the very bottom of the Chalk Rock gamma-ray perturbation. Therefore, the uncased section of borehole PL10A can be assumed to lie in around 10 m of New Pit Chalk, overlain by 20 m of Lewes Nodular Chalk, overlain by 50 m of Seaford Chalk (see Figure 2 for schematic). The New Pit formation is a firm, smooth-textured marly chalk while the Lewes Nodular is a hard, nodular, gritty chalk, with common flints, marl seams and hardgrounds. The base of the Seaford formation is at the upward change from hard, nodular, gritty chalk to soft, smooth-textured chalk (Woods and Adiss, 2004).

Fractures

To better visualize the physical structure of the aquifer at PL10A, an optical televiewer (OTV) log was obtained. The OTV log provides a 360 degree bitmap image of the entire borehole. Perfectly, planar sub-horizontal features manifest themselves as sine waves, from which the elevation, strike and dip of the fractures that intersect the borehole can be obtained (Paillet and Pedler, 1996). Theoretically, OTV logs can be interpreted automatically using techniques such as the Hough transform (Glossop et al., 1999). However, this requires that the OTV log is still intelligible after translating to a binary image. For the PL10A OTV log, this was not the case. Consequently, a manual technique was adopted. Ideally, this should be a simple case of locating the minimum and maximum points of the intersecting fractures' sine waves. However, for many of the fractures, the absolute location of the peaks and troughs was not clear. Therefore, a MATLAB program was developed to aid a more robust analysis (see Appendix). Figure 2c shows a tadpole plot of borehole PL10A derived from the OTV log. The tadpole body indicates the dip angle and the tail indicates the strike angle (or dip

direction) (Williams and Paillet, 2002). It can be seen that there are many sub-horizontal fractures throughout the extent of the borehole.

Packer testing

The vertical distribution of hydraulic conductivity was measured using a constant head double-packer permeameter. The double-packer permeameter used in borehole PL10A incorporates a pump, to abstract water from the isolated section, and a transducer to measure the pressure within the section (see Price and Williams, 1993 for more detail). Once the section to be tested is isolated by inflating the packers, water is pumped out of the isolated interval at a constant rate, Q [L^3T^{-1}]. The head in the section is monitored using the transducer and pumping continues until a steady-state drawdown is measured, ϕ_0 [L]. In typical UK Chalk boreholes this takes around 20 minutes. The horizontal hydraulic conductivity of the tested section, K [LT^{-1}] is then calculated using (Hvorslev, 1951) $K = QF / \phi_0$ where F [L] is a shape factor dependant on the ratio of horizontal and vertical hydraulic conductivity and the geometry of the packered abstraction system. The appropriate shape factor for the double packer permeameter is given in the form of a simple polynomial approximation by Mathias and Butler (2007). Assuming an isotropic medium, the resulting hydraulic conductivity profile in Figure 2d is obtained. It can be seen that the hydraulic conductivity values span almost five orders of magnitude. Generally there is a linear-log trend with elevation combined with around an order of magnitude of fluctuation. The profile is similar to those obtained at a number of other Chalk boreholes in the UK (Price et al., 1982; Price and Williams, 1993; Allen et al., 1997) and Israel (Nativ et al., 2003).

Pumping test analysis

As previously stated, the abstraction well, BBA was pumped at 5770 m^3d^{-1} for just over a day. Drawdown and recovery (after the cessation of pumping) were continuously monitored using minitrolls in the three observation boreholes and the abstraction well (Figure 3). Following the recommendation of Meier (1998), estimates of effective transmissivities were obtained using Jacob's straight line method on the late time data. Note that recovery data is plotted on a transformed axis (Agarwal, 1980; Samani and Pasandi, 2003) such that it can also be analysed using Jacob's method. The resulting transmissivity estimates are given in

133 Table 1. The mean transmissivity calculated to be $2049 \pm 230\ m^2d^{-1}$ from the drawdown
134 phase results and $2928 \pm 229\ m^2d^{-1}$ from the recovery. These are well within the national
135 ranges for the Chalk (MacDonald and Allen, 2001), further supporting that this is a relatively
136 typical site.
137
138 The discrepancy between the drawdown and recovery transmissivities is a common
139 occurrence although rarely addressed. Rushton and Chan (1976) showed that the discrepancy
140 between drawdown and recovery data could sometimes be explained by vertical variations in
141 hydraulic conductivity. Rushton and Booth (1976) and Shapiro et al. (1998) suggest that the
142 discrepancy can also be due to non-linear head losses within the well-bore. However, the idea
143 that non-linear head losses only occur within the well-bore is a common misconception
144 dating back to the empirical work of Jacob (1946). In fact, non-linear head losses due to
145 turbulence, microscopic inertia and microscopic drag (Giorgi, 1997) are likely to occur over a
146 large region within the aquifer around the well-bore due to the fast velocities caused by the
147 convergence of flow-lines (Kohl et al., 1997). This is likely to be particularly important in
148 Chalk aquifers where groundwater flow in the saturated zone is often largely confined to a
149 limited number of well connected flow pathways (e.g. Mathias et al., 2007, Hartmann et al.,
150 2007).
151
152 **Flow logging**
153
154 To gain information about which portions of the aquifer are likely to be contributing to this
155 transmissivity, upflow logs were obtained using both impeller and heat-pulse flowmeters.
156
157 Impeller flowmeter measurement involves lowering an impeller down a borehole at a fixed
158 rate and logging the rotation rate of the impeller. The net upflow velocity is obtained from a
159 simple calibration equation, which in turn can be converted to an estimated flow rate by
160 multiplying by the borehole cross-sectional area obtained from caliper log measurements.
161 Note therefore that noise in the flow impeller profiles is partially due to error in the borehole
162 area measurement. The main shortcoming of impeller flowmeters is their lack of sensitivity to
163 low-velocity flow For smaller flow rates, a heat-pulse flowmeter is more appropriate.
164

165 The heat-pulse flowmeter was originally developed by Dudgeon et al. (1975). An electrical
166 heating grid, located between two thermistors, is heated by a short pulse of electrical current.
167 The heated lens of water is moved towards one of the thermistors by the vertical component
168 of flow in the borehole. The arrival time of the heat-pulse at the thermistor is recorded. If the
169 heat-pulse is detected by the upper one, flow is upwards and vice versa. The flow velocity
170 can then be calculated by dividing the distance between the element and thermistor by the
171 respective travel time. Again, the flow-rate is estimated by multiplying the velocity by the
172 local cross-sectional area from the caliper log. Note that neither the impeller nor heat-pulse
173 flowmeters used in this study were capable of measuring flow across the borehole. The direct
174 measurement of cross-flow requires more sophisticated instrumentation (e.g. James et al.,
175 2006; Su et al., 2006).
176
177 Figures 4a and 5a show measured upflow profiles for borehole PL10A whilst pumping BBA
178 and under ambient conditions respectively. As the results obtained during pumping are more
179 straightforward to interpret, these are discussed first. It can be observed that there is relatively
180 good correspondence between the impeller and heat-pulse flowmeters. The step changes in
181 the impeller log are indicative of discrete flow horizons. It is apparent that there is an upflow
182 at the base of the borehole, followed by an additional inflow at 27 mAOD, which corresponds
183 to the Chalk Rock (compare Figure 2b). There is a small outflow at 57 mAOD followed by a
184 much larger outflow at 74 mAOD, which is sufficient to change the flow direction. Finally,
185 the impeller and heat-pulse logs suggest that there is an inflow in the vicinity of the water
186 table. This description is further supported by the temperature log in Figure 4b, where
187 inflections can be seen at 27 mAOD and 74 mAOD.
188
189 Under ambient conditions, the picture is more complicated. First, flow rates are generally
190 around a quarter of those for the pumped condition. Second, the impeller flowmeter log in
191 Figure 5a shows an upflow from the base of the hole and an outflow at 57 mAOD that
192 appears to change the flow direction such that there is a substantial downward flow in the
193 upper part of the borehole (the large peak at 63 mAOD is probably due to the flowmeter
194 hitting the side of the borehole). From 57mAOD to 85mAOD the impeller flowmeter results
195 are very variable and always negative. This could be indicative of some downward movement
196 or cross-flow. The temperature log indicates a steep gradient from 57m to 74, confirming
197 very low flows in this interval, but it has a zero gradient above 74mAOD suggesting
198 downward movement perhaps exiting the borehole at 74mAOD. Between 57 and 74 there are

only two heat pulse measurements, one positive and similar to those at greater depth, and one of zero at 65m. The higher heat pulse measurements (measuring zero) are found in the region above 74m. It seems likely that the disagreement in these various results is indicative of low vertical flows but significant cross-flow The distribution of the cross-flow is impossible to estimate but seems likely to be highest at 74mAOD or just above this point, with less significant flow between 57mOAD and 74mAOD.

Flow processes within the abstraction well

Unfortunately, the pump broke down before the logging team had time to carry out geophysical logging in the abstraction well (BBA). Consequently, it was restarted five days later at a reduced rate of 4750 m^3d^{-1}. The rate reduction was required for operational reasons and was unfortunate as it made direct comparison with the results from PL10A more problematic. Nevertheless, Figure 6 shows gamma, temperature, fluid electrical conductivity (FEC) and impeller flowmeter logging under pumped and ambient conditions. The gamma log indicates the elevation of the Chalk Rock horizon to be a little higher at 28 mAOD than found in PL10A. The temperature log is relatively flat although there is evidence of warming at 23.6 mAOD where the pump is located. Under ambient conditions, the FEC log shows a distinct step change at 45 mAOD, which is replaced under pumped conditions by three separate changes at 48 mAOD, 61 mAOD and 82 mAOD. These changes are likely to mark the main flowing horizons.

Figure 6d shows impeller flowmeter data. Under ambient conditions, flow rates are comparable with those observed in PL10A. Under pumped conditions, it appears that 2,000m^3d^{-1} enters the borehole between 82mAOD and 79mAOD, below which there is a steady increase in down-flow to 61mAOD. At this point a flow of approximately 3600m^3d^{-1} is achieved which is increased to 4750m^3d^{-1} by 48mAOD. There is considerable uncertainty over this interpretation because the variability in borehole diameter is unknown. Nevertheless, the significant fluctuations about clear trends are believed to be largely due to borehole diameter variability. A caliper log was not available so a constant borehole diameter of 0.762 m was assumed (based on the original completion report). However, as the abstraction borehole was acidized during development to increase the yield (Harker, 1974), it would be reasonable to assume that variations in diameter were accentuated and that active fractures were opened significantly by this process. The acidization process would have

depressed the water table considerably and pushed the acid well into the Chalk along open fractures, increasing the permeability greatly.

Dilution testing

Dilution tests were also performed to complement the logged flow data from PL10A (see Figures 4c and 5c). These involve lowering a fluid electrical conductivity (FEC) probe down the borehole to obtain a measure of background conductivity with depth. A tube is then lowered down to the base of the borehole and filled with a well-mixed saline solution. The tube is then retrieved so as to provide a close to uniform, elevated FEC along the borehole. As water enters and leaves the borehole via natural flow horizons the saline solution is diluted. The rate of dilution is then monitored by subsequent FEC logging. The result is a series of FEC profiles for a range of different times.

Dilution test data can be inverted to acquire flow rates associated with discrete flow horizons using a dilution test model. Such models generally assume steady-state flow and that the borehole is fully mixed laterally. In this way, solute concentrations within the borehole can be described by a one-dimensional advection dispersion equation subjected to discrete sources and sinks associated with flowing horizons (Tsang et al. 1990).

Most studies have looked at dilution test model inversions for pumped wells (Tsang et al. 1990; Tsang and Doughty, 2003; Evans 1995; Karasaki et al., 2000; Doughty, 2005). This is generally straightforward; providing the pumping rate is large enough, only inflowing features are present. These can be easily located at the beginning of the test as discrete dilution features. However, when the borehole is not directly pumped (as is the case for both ambient and pumped conditions in this paper) the presence of outflowing horizons is likely. Unfortunately, outflow locations are not apparent until later on in the test, by which time the conductivity profiles are generally complex due to the interactions different features (Doughty 2005). Therefore, outflow horizons, and consequently non-pumped wells, are much harder to interpret (Michalski and Klepp, 1990; Williams et al. 2006; Mathias et al., 2007).

Pumped conditions

Note that the pumped condition did not involve pumping PL10A, but a neighboring abstraction well 35 m away (BBA). Nevertheless, from the analysis of the flowmeter and temperature data, inflows appear to occur at 10 mAOD and 27 mAOD, and outflows at 57 mAOD and 74 mAOD. By inspection of the dilution test data, an additional inflow probably exists at 79 mAOD. Using a model similar to that of Tsang et al. (1990), Mathias et al. (2007) obtained the set of calibrated inflows and outflows listed in the flow chart to the right of the dilution test data (Figure 4c). The comparison between the resulting simulated and observed upflow and salt concentration data is very convincing (see Figures 4a and c).

From these results it is clear that water table observations made in PL10A whilst pumping do not necessarily reflect the overall aquifer response. Rather, they represent the integrated response of the four discrete flow horizons and the upflow from the base of the borehole.

Ambient conditions

The dilution test performed under ambient conditions is much harder to interpret (Figure 5c). There is definitely an upflow from the base most of which leaves the borehole at 57 mAOD. The difficulty arises in the upper region of the borehole (> 57 mAOD). At a glance, it appears that there are two major inflows at 74 mAOD and 79 mAOD, which push the salt down to the outflow at 57 mAOD. However, this conflicts with the heat-pulse flowmeter and temperature data (compare Figures 5a and b), which suggest that there is very low vertical flow in this region. Furthermore, although salt arising from the bottom of the hole initially looks as though it does not pass the 57 mAOD horizon, the final profile recorded after 587 min shows some passing (subsequent testing has shown that this feature is repeatable). This implies that the vertical flow above 57 mAOD is very small in an upward direction, this is confirmed by the heat pulse measurement at 59mAOD, but which is in complete contrast to the impeller flowmeter data. Therefore, it is assumed that the dilution taking place in the upper region is due to a complex distribution of cross-flow, which is not measured by the impeller or heat-pulse flowmeters.

Due to the number of degrees of freedom, it is difficult to delineate the vertical distribution of cross-flow using the aforementioned dilution test model. However, an estimate of the total cross-flow, Q_c [L^3T^{-1}] in that region can be obtained using the analytical solution of Drost et al. (1968)

$$\frac{\bar{c}-\bar{c}_0}{\bar{c}_i-\bar{c}_0}=\exp\left(-\frac{Vt}{Q_c}\right) \quad (1)$$

where $\bar{c}$ [ML^{-3}], $\bar{c}_0$ [ML^{-3}] and $\bar{c}_i$ [ML^{-3}] are the mean current, mean background and mean initial salt concentrations respectively, V [L^3] is volume of borehole under consideration and t [T] is time after tracer injection.

Figure 7 shows a plot of mean concentration against time in borehole PL10A for $z > 57$ mAOD under ambient conditions. Interestingly it does not converge on to the mean background value, $\bar{c}_0$ during the time studied. This is because salt is moving up (albeit at a very slow rate) past the 57 mAOD horizon. Therefore, when fitting the Drost et al. (1968) formula, the $\bar{c}_0$ parameter should be considered unknown.

If $\bar{c}_0$ and $\bar{c}_i$ are known, equation (1) can be fitted to the data using linear regression (by applying a $\log_e$ transformation to the concentration data). However, because this is not the case, a non-linear method is required. Specifically, the RMSE (root mean squared error)

$$\text{RMSE}=\sqrt{\frac{1}{N}\sum_{n=1}^{N}\left(\bar{c}_n-\bar{c}_{obs,n}\right)^2} \quad (2)$$

was minimized using a simplex search method available with MATLAB called FMINSEARCH. N [-] is the number of data samples, $\bar{c}_n$ [ML^{-3}] and $\bar{c}_{obs,n}$ [ML^{-3}] are the n^{th} modelled and observed concentration values.

A plot of the calibrated curve alongside the data is shown in Figure 6. The final parameter and RMSE values were $Q_c / V = 0.015$ min^{-1}, $\bar{c}_0 = 0.48$ kg m^{-3} and RMSE = 0.02 kg m^{-3}. The $\bar{c}_i$ was estimated by averaging the 2 to 8 minutes profile. From the calliper log, the volume of this portion of the borehole was calculated to be $V = 0.97$ m^3. Therefore, the estimated value of total cross-flow was found to be $Q_c = 22$ m^{3}d^{-1}.

Implications for transmissivity

The above calculated value of cross-flow, in conjunction with the local hydraulic gradient, can be used to calculate an additional estimate of aquifer transmissivity that is independent of the perturbation caused by pumping BBA. From the water level elevations in PL10A, PL10B and PL10E prior to pumping BBA, the local hydraulic gradient, J_x [-] was estimated to be $1/(224 \pm 53)$ (error is based on 0.5 cm error on water level elevations). An estimate of the regional groundwater flow, q [$L^3T^{-1}L^{-1}$] can be obtained from $q = Q_c / (\alpha D)$ where D [L] is the borehole diameter and α [-] is a dimensionless borehole factor. Assuming that the well is perfectly circular and the aquifer is isotropic and homogenous, Bidaux and Tsang (1991) calculated that $\alpha = 2$. From the caliper log (Figure 2a) the average diameter of PL10A over the region 57 mAOD < z < 86 mAOD was 0.206 m. It follows that an estimate of the regional groundwater flow around PL10A is 22 / (2 x 0.206) = 53.4 $m^3d^{-1}m^{-1}$. Applying Darcy's Law then leads to a transmissivity estimate of $11{,}945 \pm 974$ m^2d^{-1}, an order of magnitude larger than the values obtained from the pumping test analysis (in Figure 3) and outside the national statistical distributions presented by MacDonald and Allen (2001). However, for a well developed borehole Bidaux and Tsang (1991) suggest that α might be more around 5, which leads to a more realistic transmissivity value of 4778 ± 390 m^2d^{-1}.

Given the difference in flow distributions in PL10A under pumped and ambient conditions, the discrepancy in transmissivity estimates is not surprising. Under pumped conditions, flow was concentrated in just four discrete horizons where as under ambient conditions flow appeared to be distributed over a region of around 29 m thickness, but it seems likely that most cross-flow occurs above 79mAOD. However, if this was really the case, it is expected that the integrated value of the packer test results should also be of the order 5000 m^2d^{-1}. The packer test data in Figure 2d would therefore suggest that there must be features above those measured of significantly greater permeability. Unfortunately it was not possible to observe these as the borehole at this elevation was too wide for the packers.

Conclusions

This integrated study has revealed significant new insights into the behavior of groundwater flow and head in an observation and abstraction borehole in the UK fractured Chalk aquifer under pumped and ambient conditions. Under pumped conditions the system behaves in a

363 relatively straightforward manner flow being mainly concentrated in four discrete flow
364 horizons. Furthermore, excellent correspondence was observed between the three methods of
365 borehole flow velocity measurement: impeller flowmeter, heat-pulse flowmeter and dilution
366 test inversion. Under ambient conditions the system appears much more complicated.
367 Specifically, in the upper half of the borehole the impeller flowmeter suggested a substantial
368 downward flow, the heat-pulse flowmeter suggested a close to negligible upward flow whilst
369 the dilution testing provided evidence of significant dilution. It was concluded that this was
370 due to the significant cross-flow occurring over a region of 29 m thickness. Analysis of
371 drawdown data, recovery data and a Drost analysis of the ambient crossflow data yielded
372 aquifer transmissivity estimates of 2049 m^2d^{-1}, 2928 m^2d^{-1} and > 4388 m^2d^{-1} respectively.
373 The discrepancy between the drawdown and recovery estimates is assumed to be caused by
374 non-linear head-losses associated with turbulence and inertial effects. The difference between
375 the pumping test and Drost results was then explained by the groundwater flow during
376 pumping bypassing this aforementioned 29 m region of aquifer.
377
378 Changes in observation well flow profiles induced by pumping in another well are primarily
379 thought to occur due to changes in the head distribution of the large-scale flowpaths (Le
380 Borgne et al., 2006). Previously, this phenomenon has been exploited to identify and
381 characterize those features that are directly connected to the abstraction well (Williams and
382 Paillet. 2002; Le Borgne et al., 2006). However, in many instances, aquifer parameters are
383 sought for modeling groundwater or catchment behavior away from the presence of
384 abstraction wells. These might, for example, be to evaluate water resources, minimum
385 environmental stream flows or responses to extreme events (droughts and floods), This
386 emphasises the great care that must be taken in the extrapolation of pumping test results to
387 ambient flow conditions. The marked change in flow pathways also implies that similar
388 caution is required when applying transport parameters obtained during pumping to such
389 conditions.
390
391 **Appendix – Details of the strike and dip program**
392
393 A fracture is identified from a visual inspection of the OTV bitmap image. The user then
394 selects three points anywhere along the fracture intersect: (θ_1, z_1), (θ_2, z_2) and (θ_3, z_3), where
395 $0 < \theta < 2\pi$ (i.e. North = 0 and South = π) and z [L] is elevation. The program then
396 superimposes the sine wave

$$z = \Delta z \sin(\theta + \alpha) + z_0 \tag{3}$$

where

$$\Delta z = a \sec(\alpha) \tag{4}$$

$$\tan(\alpha) = -b / a \tag{5}$$

$$z_0 = \frac{z_3 \sin(\theta_1 - \theta_2) + z_2 \sin(\theta_3 - \theta_1) + z_1 \sin(\theta_2 - \theta_3)}{\sin(\theta_1 - \theta_2) + \sin(\theta_3 - \theta_1) + \sin(\theta_2 - \theta_3)} \tag{6}$$

and

$$a = \frac{(z_3 - z_2)\cos(\theta_1) + (z_1 - z_3)\cos(\theta_2) + (z_2 - z_1)\cos(\theta_3)}{\sin(\theta_1 - \theta_2) + \sin(\theta_3 - \theta_1) + \sin(\theta_2 - \theta_3)} \tag{7}$$

$$b = \frac{(z_3 - z_2)\sin(\theta_1) + (z_1 - z_3)\sin(\theta_2) + (z_2 - z_1)\sin(\theta_3)}{\sin(\theta_1 - \theta_2) + \sin(\theta_3 - \theta_1) + \sin(\theta_2 - \theta_3)} \tag{8}$$

The three points can then be moved independently, and the sine wave automatically corrects itself to fit them. The user can keep moving the points until an appropriate visual fit between the sine wave and the fracture intersect is achieved (see Figure 8). The final values of (θ_1, z_1), (θ_2, z_2) and (θ_3, z_3) are subsequently stored. The strike and dip of the fracture can then be obtained from

$$\text{strike} = \begin{cases} \pi/2 - \alpha, & \Delta z < 0 \\ 3\pi/2 - \alpha, & \Delta z \geq 0 \end{cases} \tag{9}$$

$$\text{dip} = \arctan(2 \mid \Delta z \mid / D) \tag{10}$$

References

Agarwal RG (1980) A new method to account for producing time effects when drawdown type curves are used to analyze pressure buildup and other test data. SPE Paper 9289 presented at the 55th SPE Annual Technical Conference and Exhibition, 21–24 September, Dallas, Texas

426 Allen DJ, Brewerton LJ, Coleby LM, Gibbs BR, Lewis MA, MacDonald AM, Wagstaff SJ,
427 Williams AT (1997) The Physical Properties of Major Aquifers in England and
428 Wales. British Geological Survey Technical Report, WD/97/34
429 Bidaux P, Tsang CF (1991) Fluid flow patterns around a well bore or an underground drift
430 with complex skin effects. Water Resour Res 27(11): 2993–3008
431 Doughty C (2005) Signatures in flowing fluid electric conductivity logs. J Hydrol 310: 157–
432 180
433 Drost W, Klotz D, Koch A, Moser H, Neumaier F, Rauert W (1968) Point dilution methods
434 of investigating ground water flow by means of radioisotopes. Water Resour Res 4(1):
435 125-146
436 Dudgeon CR, Green MJ, Smedmor WJ (1975) Heat-pulse flowmeter for boreholes:
437 Medmenham. Technical Report TR4., Water Research Centre, England
438 ENTEC (2005) A Comparison of Chalk Groundwater Models in and Around the River Test
439 Catchment. Report PP-925
440 Evans DG (1995) Inverting fluid conductivity logs for fracture inflow parameters. Water
441 Resour Res 31(12): 2905–2916
442 Giorgi T (1997) Derivation of the Forchheimer law via matched asymptotic expansions.
443 Transp Porous Media 29(2): 191–206
444 Glossop K, Lisboa PJG, Russel PC, Siddans A, Jones GR (1999) An implementation of the
445 Hough transformation for the identification and labelling of fixed period sinusoidal
446 curves, Computer Vision and Image Understanding 74(1): 96-100
447 Harker D (1974) Groundwater scheme stage 1: Pumping test at Bottom Barn SU57/151.
448 Ground Water Section, TCD, Thames Water Authority
449 Hartmann S, Odling NE, West LJ (2007) A multi-directional tracer test in the fractured Chalk
450 aquifer of E. Yorkshire, UK. J Contam Hydrol 94: 315-331
451 James SC, Jepsen RA, Beauheim RL, Pedler WH, Mandell WA (2006) Simulations to verify
452 horizontal flow measurements from a borehole flowmeter. Ground Water 44(3): 394-
453 405
454 Keys SW (1990) Borehole geophysics applied to groundwater investigations. USGS
455 Techniques of Water-Resources Investigations, Book 2, Chapter E2
456 Kohl T, Evans KF, Hopkirk RJ, Jung R, Rybach L (1997) Observation and simulation of non-
457 Darcian flow transients in fractured rock. Water Resour Res 33(3): 407–418
458 Le Borgne T, Paillet F, Bour O, Caudal JP (2006) Cross-borehole flowmeter tests for
459 transient heads in heterogeneous aquifers. Ground Water 44(3): 444-452

460 Liu Y, Gupta HV (2007) Uncertainty in hydrologic modeling: Toward an integrated data
461 assimilation framework. Water Resour Res 43: W07401
462 MacDonald AM, Allen DJ (2001) Aquifer properties of the Chalk of England. Q J Eng Geol
463 34: 371-384
464 Mathias SA, Butler AP (2007) Shape factors for constant-head double packer permeameters.
465 Water Resour Res 43: W06430
466 Mathias SA, Butler AP, Peach DW, Williams AT (2007) Recovering tracer test input
467 functions from fluid electrical conductivity logging in fractured porous rocks. Water
468 Resour Res 43: W07443
469 Meier PM, Carrera J, Sanchez-Vila X (1998) An evaluation of Jacob's method for the
470 interpretation of pumping tests in heterogeneous formations. Water Resour Res 34(5):
471 1011-1025
472 Michalski A, Klepp GM (1990) Characterization of transmissive fractures by simple tracing
473 of in-well flow. Ground Water 28(2): 191–198
474 Nativ R, Adar E, Assaf L, Nygaard E (2003) Characterization of the hydraulic properties of
475 fractures in chalk. Ground Water 41(4): 532-543
476 Paillet FL, Pedler WH (1996) Integrated borehole logging methods for wellhead protection
477 applications. Eng Geol 42: 155-165
478 Price M, Morris B, Robertson A (1982) A study of intergranular and fissure permeability in
479 Chalk and Permian aquifers, using double-packer injection testing. J Hydrol 54: 401-
480 423
481 Price M, Williams AT (1993) A pumped double-packer system for use in aquifer evaluation
482 and groundwater sampling. Proceedings of the Institution of Civil Engineers, Part 2,
483 101: 85–92
484 Rawson PF, Allen P, Gale AS (2001) The Chalk Group revised lithostratigraphy.
485 Geoscientist 11: 21
486 Rushton KR, Chan YK (1976) Pumping test analysis when parameters vary with depth.
487 Ground Water 14: 82-87
488 Rushton KR, Booth SJ (1976) Pumping-test analysis using a discrete time—discrete space
489 numerical method. J Hydrol 28: 13-27.
490 Rushton KR, Connorton BJ, Tomlinson LM (1989) Estimation of the ground water resources
491 of the Berkshire Downs supported by mathematical modelling. Q J Eng Geol 22: 329-
492 341

493 Samani N, Pasandi M (2003) A single recovery type curve from Theis' exact solution.
494 Ground Water, 41(5): 602–607 [Notice of Plagiarism with regard to this paper
495 appeared in Ground Water 42(1)]
496 Schurch M, Buckley D (2002) Integrating geophysical and hydrochemical borehole-log
497 measurements to characterize the Chalk aquifer, Berkshire, United Kingdom.
498 Hydrogeol J 10: 610-627
499 Shapiro AM., Oki DS, Green EA (1998) Estimating formation properties from early-time
500 recovery in wells subject to turbulent head losses. J Hydrol 208: 223-236
501 Su GW, Freifeld BM, Oldenburg CM, Jordan PD, Daley PF (2006) Interpreting velocities
502 from heat-based flow sensors by numerical simulation. Ground Water 44(3): 386-393
503 Tsang CF, Hufschmeid P, Hale FV (1990) Determination of fracture inflow parameters with
504 a borehole fluid conductivity logging method. Water Resour Res 26(4): 561–578
505 Tsang CF, Doughty C (2003) Multirate flowing fluid electric conductivity logging method.
506 Water Resour Res 39(12): 1354
507 Wheater HS, Peach DW (2004) Developing interdisciplinary science for integrated catchment
508 management: The UK LOwland CAtchment Research (LOCAR) Programme. Int J
509 Water Resour Dev 20: 369-385
510 White HJO (1907) The Geology of the Country around Hungerford and Newbury, Memoir,
511 British Geological Survey
512 Williams JH, Paillet FL (2002) Using flowmeter pulse tests to define hydraulic connections
513 in the subsurface: a fractured shale example. J Hydrol 265: 100-117
514 Williams A, Bloomfield J, Griffiths K, Butler A (2006) Characterising the vertical variations
515 in aquifer properties within the Chalk aquifer. J Hydrol 330: 53–62
516 Woods MA, Aldiss DT (2004) The stratigraphy of the Chalk Group of the Berkshire Downs.
517 Proceedings of the Geologists' Association 115: 249-265

Table 1 Transmissivity data obtained from Jacob analysis (see Figure 3)

Borehole	**Drawdown**	**Recovery**
BBA	1782 m^2/day	2933 m^2/day
PL10A	2328 m^2/day	3076 m^2/day
PL10B	2219 m^2/day	3147 m^2/day
PL10E	866 m^2/day	2555 m^2/day
Mean	2049 m^2/day	2928 m^2/day
Standard deviation	230 m^2/day	229 m^2/day

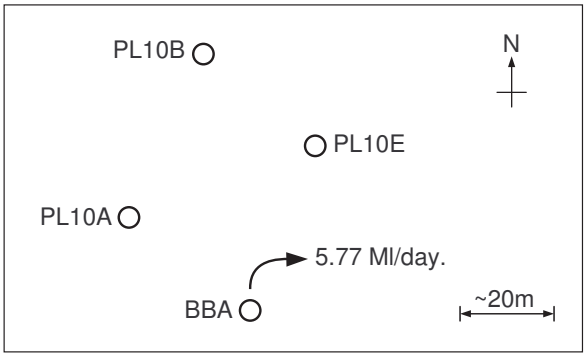

Figure 1 Site layout

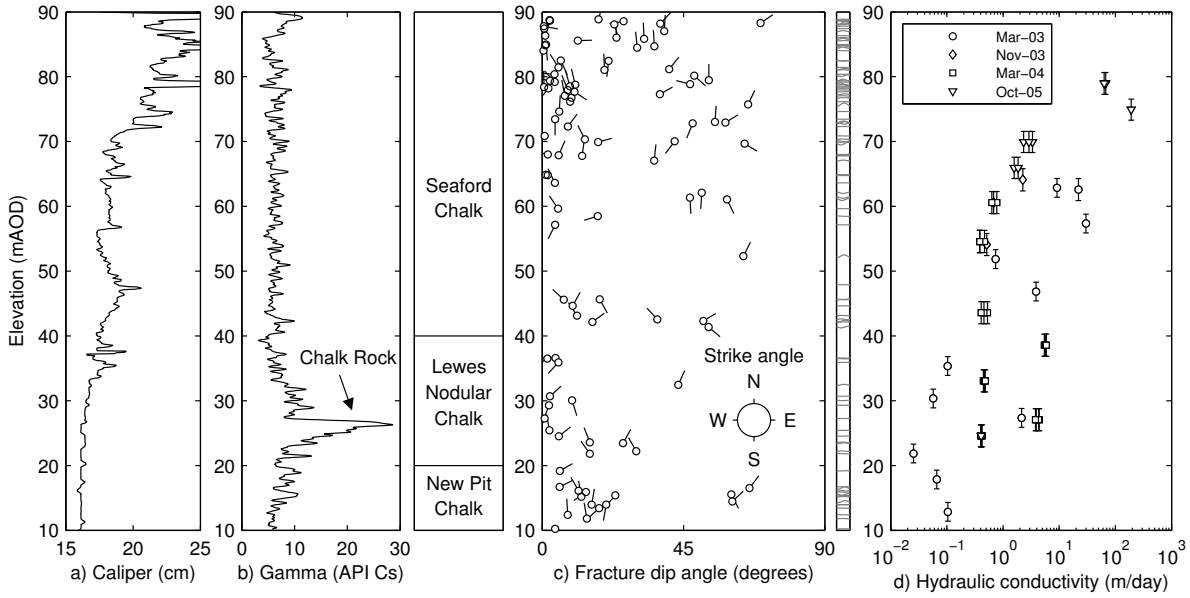

530

531 **Figure 2** Stratigraphy, fracturing and hydraulic conductivity distributions for borehole
532 PL10A. Subplot (a) shows the variation of borehole diameter with elevation. Subplot (b)
533 shows a natural gamma log along with the stratigraphy inferred from it. Subplot (c) is a
534 tadpole plot, derived from the televiewer log (see sketch to the right), showing the dip
535 (tadpole body) and strike (tadpole tail) of the fractures. Subplot (d) shows the hydraulic
536 conductivity distribution measured from the constant head double packer permeameter tests.
537 These were taken at different dates as detailed in the legend. The error bars represent the
538 length of isolated interval (≈ 3 m).

539

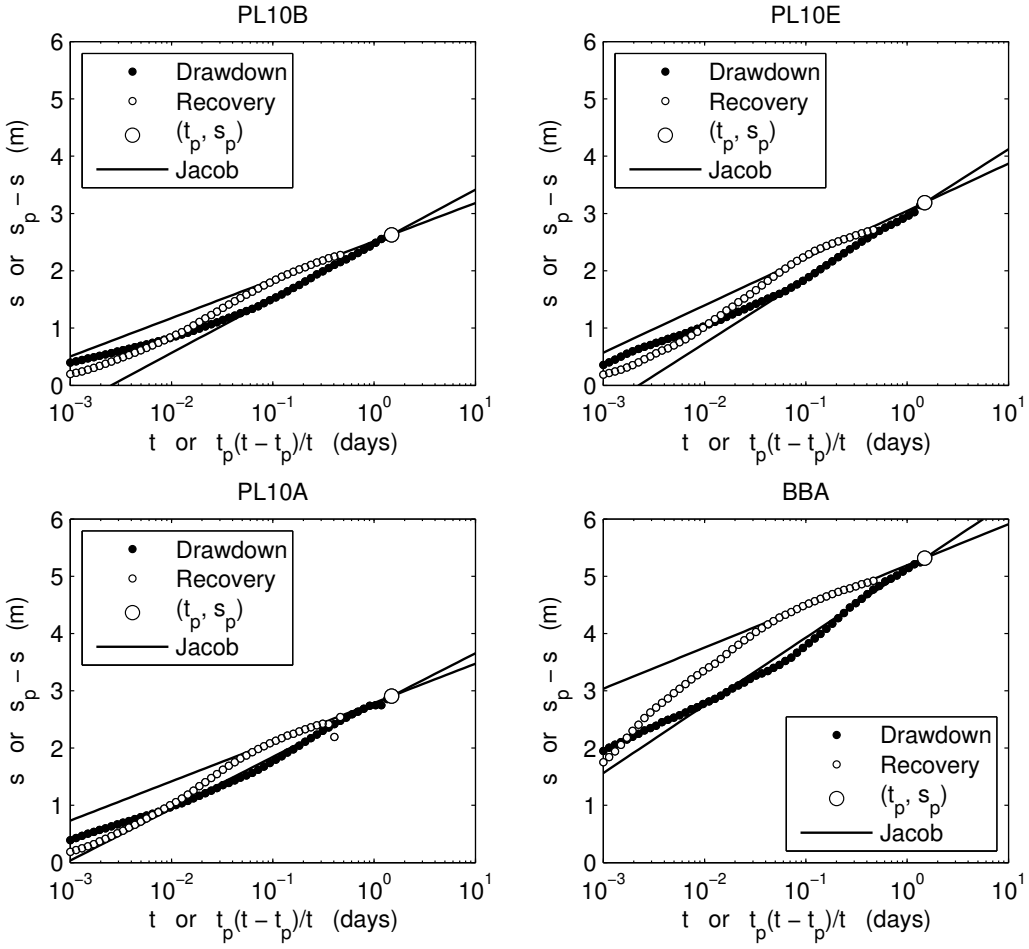

Figure 3 Plots of drawdown and recovery for BBA, PL10A, PL10B and PL10E whilst pumping BBA at 5.77 Ml/day. Note that t_p and s_p refers to the time the pump was switched off and the corresponding drawdown. For drawdown s is plotted against t where as for recovery $s_p - s$ is plotted against $t_p(t - t_p)/t$.

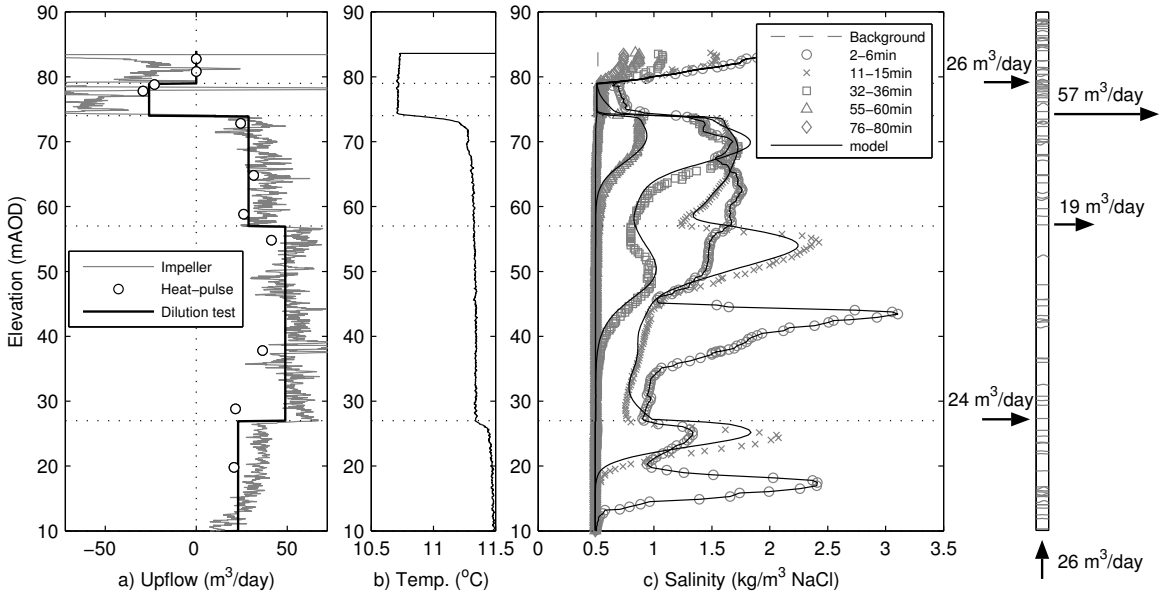

546

547 **Figure 4** Flow logging, temperature logging and dilution testing in PL10A whilst pumping
548 the Bottom Barn abstraction well (≈ 35 m away).

549

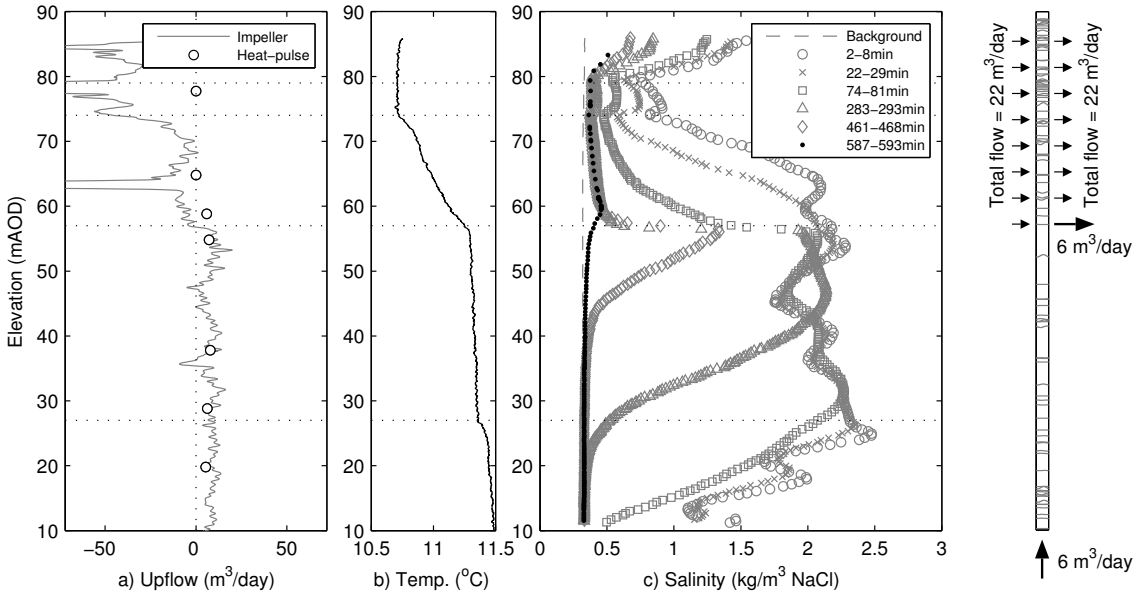

550

551 **Figure 5** Flow logging, temperature logging and dilution testing in PL10A under ambient
552 conditions.

553

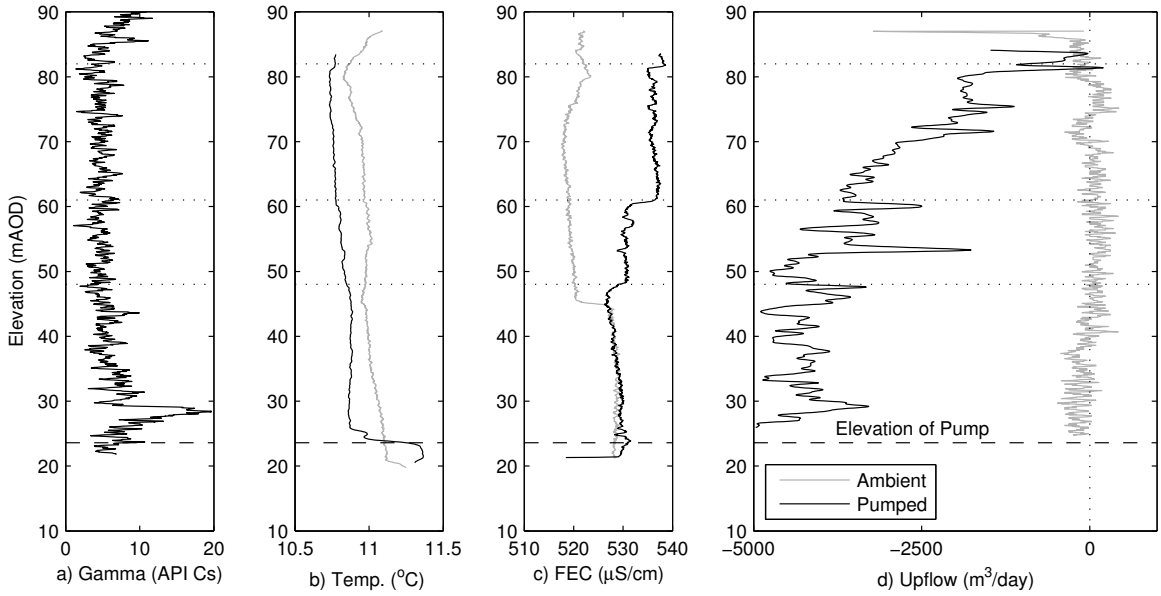

554

555 **Figure 6** Gamma, temperature, fluid electrical conductivity and impeller flowmeter logging
556 in BBA. Note that this logging was undertaken 5 days after the previously discussed pumping
557 test and the BBA was pumped at a reduced rate of 4750 m^3/day.

558

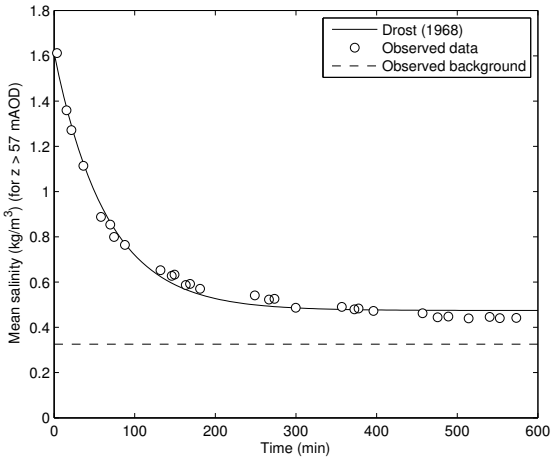

559

560 **Figure 7** Plot of mean concentration against time in borehole PL10A for z > 57 mAOD under
561 ambient conditions.

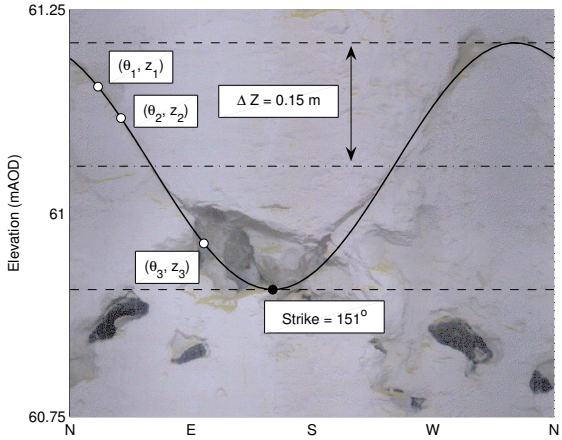

562

563 **Figure 8** An example of a sine wave fit to a fracture in borehole PL10A.