

Dynamics of strongly-coupled spiking neurons

Paul C. Bressloff and S. Coombes

Nonlinear and Complex Systems Group

*Department of Mathematical Sciences, Loughborough University
Loughborough, Leicestershire LE11 3TU, U. K.*

December 15th, 1998

Abstract

We present a dynamical theory of integrate-and-fire neurons with strong synaptic coupling. We show how phase-locked states that are stable in the weak coupling regime can destabilize as the coupling is increased leading to states characterized by spatio-temporal variations in the inter-spike intervals (ISIs). The dynamics is compared with that of a corresponding network of analog neurons in which the outputs of the neurons are taken to be mean firing rates. A fundamental result is that for slow interactions there is good agreement between the two models (on an appropriately defined time-scale). Various examples of desynchronization in the strong coupling regime are presented. First, a globally coupled network of identical neurons with strong inhibitory coupling is shown to exhibit oscillator death in which some of the neurons suppress the activity of others. However, the stability of the synchronous state persists for very large networks and fast synapses. Second, an asymmetric network with a mixture of excitation and inhibition is shown to exhibit periodic bursting patterns. Finally, a one-dimensional network of neurons with long-range interactions is shown to desynchronize to a state with a spatially periodic pattern of mean firing rates across the network. This is modulated by deterministic fluctuations of the instantaneous firing rate whose size is an increasing function of the speed of synaptic response.

1 Introduction

There are two basic classes of neurodynamical model that are distinguished by their representation of neuronal output activity (see Abbott 1994 and references therein). The first considers the output of a neuron to be a mean firing rate that either specifies the number of spikes emitted in some fixed time window (Hopfield 1984; Amit and Tsodyks 1991; Ermentrout 1994) or corresponds to the probability of firing within some population (Wilson and Cowan 1972; Gerstner 1995). Recently, however, a number of experiments on sensory neurons have shown that the precise timing of spikes may be significant in neuronal information processing, and this has led to renewed interest in the second class of neurodynamical models based on spiking neurons. For example, spike train recordings from H1, a motion-sensitive neuron in the fly visual system, exhibit variability of response to constant stimuli but a high degree of reproducibility for more natural dynamic stimuli (Ruyter van Steveninck *et al* 1997). This reproducibility provides an enhanced capacity for carrying information (Rieke *et al* 1996). Similar findings have been obtained in retinal ganglion cells of the tiger salamander and rabbit (Berry *et al* 1997). It is also well known that precise spike timing is essential for sound localization in the auditory system of animals such as the barn owl (Carr and Konishi 1990). Recent advances in computational neuroscience support the notion that synapses are capable of supporting computations based on highly structured temporal codes (Mainen and Sejnowski 1995; Gerstner *et al* 1997). Moreover this mode of computation suggests how only one type of neuro-architecture can support the processing of several very different sensory modalities (Hopfield 1995). Such codes are undoubtedly important in sensory and cognitive processing. The simplest and most popular example of a spiking neuron is the so-called *integrate-and-fire* (IF) model (Keener *et al* 1981; Tuckwell 1988) and its generalizations (Gerstner 1995). The state of an integrate-and-fire neuron changes discontinuously (resets) whenever it crosses some threshold and fires, so that a complete description in terms of smooth differential equations is no longer possible. This type of model can be derived systematically from more detailed Hodgkin-Huxley equations describing the process of action potential generation (Abbott and Kepler 1990; Kistler *et al* 1997).

There are major differences in the analytical treatments of firing rate and spiking neural network models. A common starting point for the former is to consider conditions under which destabilization of a homogeneous low activity state occurs leading to the formation of a state with inhomogeneous and/or time-dependent firing rates (see for example Wilson and Cowan 1973; Ermentrout and Cowan 1979; Atiya and Baldi 1989; Li and Hopfield 1989; Ermentrout 1998). On the other hand, most of the work on IF network dynamics has been concerned with the existence and stability of phase-locked so-

lutions, that is, solutions in which the neurons fire at a fixed common frequency. Analysis of globally coupled integrate-and-fire oscillators in terms of return maps has shown that synchronization almost always occurs in the presence of instantaneous excitatory interactions (Mirollo and Strogatz 1990). Subsequently this result has been extended to take into account the effects of inhomogeneities and various synaptic and axonal delays (Treves 1993; Tsodyks *et al* 1993; Abbott and van Vreeswijk 1993; van Vreeswijk *et al* 1994; Ernst *et al* 1995; Hansel *et al* 1995; Coombes and Lord 1997; Bressloff *et al* 1997; Bressloff and Coombes 1998a,b). One finds that for small transmission delays, inhibitory (excitatory) synapses tend to synchronize if the rise time of a synapse is longer (shorter) than the duration of an action potential. Increasing the transmission delay leads to alternating bands of stability and instability of the synchronous state. Analogous results have been obtained in the spike response model (Gerstner *et al* 1993; Gerstner 1995; Gerstner *et al* 1996). Traveling waves of synchronized activity have been investigated in finite chains of IF oscillators modeling locomotion in simple vertebrates (Bressloff and Coombes 1998b), and in two-dimensional networks where spirals and target patterns are also observed (Chu *et al* 1994; Kistler *et al* 1998).

In this paper we present a theory of spike train dynamics in IF networks that bridges the gap between firing rate and spiking models. In particular, we show that synaptic interactions that are synchronizing in the weak coupling regime can actually become desynchronizing for sufficiently strong coupling. The resulting dynamics is compared with the behavior of a corresponding analog model in which the outputs of the neurons are taken to be mean firing rates. A basic result of our work is that for slow interactions there is good agreement between the two models (on an appropriately defined time-scale). On the other hand, discrepancies can arise for fast synapses where IF neurons may remain phase-locked.

We take as our starting point the nonlinear mapping of the neuronal firing times and show how a bifurcation analysis of this map can serve as a basis for understanding the extremely rich dynamical structure seen in networks of spiking neurons. Explicit criteria for the stability of phase-locked solutions are derived in both the weak and strong coupling regimes by considering the propagation of perturbations of the firing times throughout a network. In the strong coupling case the analysis predicts regions in parameter space where instabilities in the firing times may cause transitions to non-phase locked states. Numerical simulations are used to establish that, in these regions, the full nonlinear firing map can support several distinct types of behavior. For small networks these include mode-locked bursting states, where packets of spikes may be generated separated by periods of inactivity and inhomogeneous states in which some of the oscillators become

inactive. For large global inhibitory networks with vanishing mean perturbations of the firing times we show that such bifurcations can be suppressed, in agreement with the mode locking theorem of Gerstner *et al* (1996). As a final example of the importance of strong coupling instabilities we consider a ring of IF neurons with a Mexican hat interaction function. A discrete Turing bifurcation of the firing times from a synchronous state to a state with spatio-temporal variations of the ISIs is shown to occur in the strong coupling regime. Further, it is shown how the separation of the ISI orbits in phase space results in a spatially periodic pattern of mean firing rate across the network.

2 Integrate-and-fire model of a spiking neuron

The standard dynamical system for describing a neuron with spatially constant membrane potential V is based upon conservation of electric charge, so that

$$C \frac{dV}{dt} = -F + I_s + I \quad (2.1)$$

where C is the cell capacitance, F the membrane current, I_s the sum of synaptic currents entering the cell and I describes any external currents. In the Hodgkin-Huxley model the membrane current arises mainly through the conduction of sodium and potassium ions through voltage dependent channels in the membrane. The contribution from other ionic currents is assumed to obey Ohm's law. In fact F is considered to be a function of V and of three time-dependent and voltage-dependent conductance variables m , n and h :

$$F(V, m, n, h) = g_L(V - V_L) + g_K n^4(V - V_K) + g_{Na} h m^3(V - V_{Na}) \quad (2.2)$$

where g_L , g_K and g_{Na} are constants and V_L , V_K and V_{Na} represent the constant membrane reversal potentials associated with the leakage, potassium and sodium channels respectively. The conductance variables m , n and h take values between 0 and 1 and approach the asymptotic values $m_\infty(V)$, $n_\infty(V)$ and $h_\infty(V)$ with time constants $\tau_m(V)$, $\tau_n(V)$ and $\tau_h(V)$ respectively.

The conductance based Hodgkin-Huxley equations depend upon four dynamical variables. A reduction of this number is often desirable in order to facilitate any mathematical analysis and to ease the computational burden for simulations of large networks. A systematic approach for doing this involves the use of equivalent potentials (Abbott and Kepler 1990; Kepler *et al* 1992). Following this approach one can derive an integrate-and-fire (IF) model, which provides a caricature of the capacitive nature of cell membrane at the expense of a detailed model of the refractory process. The IF model satisfies equation (2.1) with $F = F(V)$ together with the condition that whenever the neuron reaches a

threshold h , it fires and V is immediately reset to the resting potential V_0 . The dynamics of the membrane conductances m, n, h is eliminated completely. Using a curve fitting procedure it is possible to approximate $F(V)$ by a cubic, $F(V) = a(V - V_0)(V - V_1)(V - h)$ where the constants $a, V_{0,1}$ and h can be determined explicitly from the reduction of the underlying Hodgkin-Huxley equations.

At a synapse, presynaptic firing results in the release of neurotransmitters that causes a change in the membrane conductance of the postsynaptic neuron. This postsynaptic current may be written

$$I_s = g_s s (V_s - V) \quad (2.3)$$

where V is the voltage of the postsynaptic neuron, V_s is the membrane reversal potential and g_s is a constant. The variable s corresponds to the probability that a synaptic receptor channel is in an open conducting state. This probability depends on the presence and concentration of neurotransmitter released by the presynaptic neuron. Under certain assumptions it may be shown that a second order Markov scheme for the synaptic channel kinetics describes the so-called alpha function response commonly used in synaptic modeling (Destexhe *et al* 1994): the synaptic response to an incoming spike at time t_0 is

$$s(t) = s_0(t - t_0)e^{-\alpha(t-t_0)}, \quad t > t_0 \quad (2.4)$$

for constants s_0, α . Here α determines the inverse rise-time for synaptic response. If we now combine equations (2.1) and (2.3) under the approximation $F = F(V)$ then we obtain an equation of the form (after setting $C = 1$)

$$\frac{dV}{dt} = -F(V) + I + g_s \sum_m s(t - t_m)[V_s - V] \quad (2.5)$$

We are assuming that the neuron receives a sequence of action potential spikes at times $\{t_m\}$ and each spike generates a synaptic response according to equation (2.4). The neuron itself fires a spike whenever $V(t)$ reaches the threshold h , and V is immediately reset to the resting potential V_0 . Denoting the firing times of the neuron by $\{T_m\}$, we can view the neuron as a device that maps $\{t_m\} \rightarrow \{T_m\}$. We introduce two additional simplifications. First, we neglect shunting effects by setting $V_s - V \approx V_s$ – the possible nonlinear effects of shunting are discussed by Abbott (1991). Second, we reduce $F(V)$ further by considering the linear approximation $F(V) = b(V - V_0)$ (Abbott and Kepler 1990). This linear IF model of a spiking neuron will be used in our subsequent analysis of network dynamics, see sections 3 and 4. However, before proceeding further, we briefly mention an alternative formulation of spiking neurons based on the so-called spike response model.

The IF model assumes that it is the capacitative nature of the cell that in conjunction with a simple thresholding process dominates the production of spikes. The spike re-

sponse (SR) model (Gerstner and van Hemmen 1994; Gerstner 1995; Gerstner *et al* 1996) is a more general framework that can accommodate the apparent reduced excitability (or increased threshold) of a neuron after the emission of a spike. Spike reception and spike generation are combined with the use of two separate response functions. The first, $h_s(t)$, describes the postsynaptic response to an incoming spike in a similar fashion to the IF model, whereas the second, $h_r(t)$, mimics the effect of refractoriness. The refractory function $h_r(t)$ can in principle be related to the detailed dynamics underlying the description of ionic channels. In practice an idealized functional form is often used, although numerical fits to the Hodgkin-Huxley equations during the spiking process are also possible (Kistler *et al* 1997). In more detail, a sequence of incoming spikes $\{t_m\}$ evokes a postsynaptic potential in the neuron via $V^s(t) = \sum_m h_s(t - t_m)$ where $h_s(t)$ incorporates details of axonal, synaptic and dendritic processing. The total membrane potential of the neuron is taken to be $V(t) = V^r(t) + V^s(t)$ where $V^r(t) = \sum_m h_r(t - T_m)$ and $\{T_m\}$ is the sequence of output firing times. Whenever $V(t)$ reaches some threshold the neuron fires a spike and at the same time a negative contribution h_r is added to V so as to approximate the reduced excitability seen after firing. Since the reset condition of the IF model is equivalent to a sequence of current pulses, $-h \sum_m \delta(T_m)$, the linear IF model is a special case of the SR model. That is, if $I = 0$, $F(V) = -V$ and we neglect shunting then we can integrate equation (2.5) to obtain the equivalent formulation

$$V(t) = \sum_m h_r(t - T_m) + \sum_m h_s(t - t_m) \quad (2.6)$$

where

$$h_r(t) = -he^{-t}, \quad h_s(t) = \int_0^t e^{-(t-t')} s(t') dt', \quad t > 0 \quad (2.7)$$

and there is no reset.

It should be noted that most work to date on the analysis of the SR model has been based on the study of large networks using dynamical mean field theory (Gerstner and van Hemmen 1994; Gerstner 1995), which can be viewed as a generalization of the population averaging approach of Wilson and Cowan (1972). This is different to the approach taken by ourselves in this paper, which is principally concerned with the dynamics of finite networks of spiking neurons. However, a link between the two will be made in section 4.3, where we discuss large globally coupled networks and the mode-locking theorem of Gerstner *et al* (1996).

3 Averaging methods for analyzing IF network dynamics

We now consider a network of IF neurons that interact via synapses by transmitting spike trains to one another. Let $V_i(t)$ denote the state of the i th neuron at time t , $i = 1, \dots, N$, where N is the total number of neurons in the network. Suppose that the variables $V_i(t)$ evolve according to the equations (cf. equation (2.5))

$$\tau_m \frac{dV_i(t)}{dt} = -V_i(t) + I_i + X_i(t) \quad (3.1)$$

where I_i is a constant external bias, τ_d is the membrane time constant, and $X_i(t)$ is the total synaptic current into the cell. We shall fix the units of time by setting $\tau_d = 1$; typical values for τ_d are in the range 5 – 20 msec. Equation (3.1) is supplemented by the reset condition that whenever $V_i = h$, neuron i fires and is reset to $V_i = 0$. We shall set the threshold $h = 1$. The synaptic current $X_i(t)$ is generated by the arrival of spikes from neuron j , and takes the explicit form

$$X_i(t) = \epsilon \sum_{j=1}^N W_{ij} \sum_{m=-\infty}^{\infty} J(t - T_j^m) \quad (3.2)$$

where ϵW_{ij} is the effective synaptic weight of the connection from the j th to the i th neuron, $J(t)$ determines the time-course of the post-synaptic response to a single spike with $J(t) = 0$ for $t < 0$, and T_j^m denotes the sequence of firing times of the j th neuron with m running through the integers. We have introduced a coupling constant ϵ characterizing the overall strength of synaptic interactions. From the discussion of section 2, a biologically motivated choice for $J(t)$ is

$$J(t) = s(t - \tau_a)\Theta(t - \tau_a), \quad s(t) = \alpha^2 t e^{-\alpha t} \quad (3.3)$$

where $s(t)$ is an alpha function (with unit normalization), τ_a is a discrete axonal transmission delay, and Θ is the unit step-function, $\Theta(t) = 1$ if $t > 0$ and zero otherwise. The maximum synaptic response then occurs at a non-zero delay $t = \tau_a + \alpha^{-1}$. In a companion paper, the effects of dendritic interactions (both passive and active) will be analyzed by taking $J(t)$ to be the Green's function of some cable equation (Bressloff 1998).

Although equations (3.1) and (3.2) are considerably simpler than those describing a network of Hodgkin-Huxley neurons, the analysis of the resulting dynamics is still a non-trivial problem since one has to handle both the presence of delays and discontinuities arising from reset. Most work to date has therefore been based on some form of approximation scheme. We shall describe two such schemes: (i) Phase reduction in the

weak coupling regime and (ii) time-averaging with slow synapses. In section 4 we shall then carry out a direct analysis of the IF network dynamics without recourse to such approximations.

3.1 Weak coupling: phase-oscillator models

We shall first show how in the weak coupling limit equation (3.1) with reset can be reduced to a phase-oscillator equation. For concreteness, assume that $I_i = I > 1$ for all $i = 1, \dots, N$ so that in the absence of any coupling ($\epsilon = 0$) each neuron acts as a regular oscillator by firing spikes with a constant period $T = \ln[I/(I - 1)]$. Following van Vreeswijk *et al* (1994), we introduce the phase variable $\psi_i(t)$ according to

$$(\text{mod } 1) \psi_i(t) + \frac{t}{T} = \Psi(V_i(t)) \equiv \frac{1}{T} \int_0^{V_i(t)} \frac{dx}{F(x)} \quad (3.4)$$

where $F(x) = I - x$ for the linear IF model. (One can also apply this transform to the nonlinear IF model discussed in section 2 with $F(x)$ now given by a cubic). Under such a transformation equation (3.1) becomes

$$\dot{\psi}_i(t) = R_T(\psi_i(t) + t/T) X_i(t) \quad (3.5)$$

with

$$R_T(\theta) \equiv \frac{1}{T} \frac{1}{F[\Psi^{-1}(\theta)]} = \frac{[1 - e^{-T}] e^{T\theta}}{T} \quad (3.6)$$

for $0 \leq \theta < 1$ and $R_T(\theta + k) = R_T(\theta)$ for all integers k . In the absence of any coupling the phase variable $\psi_i(t)$ is constant in time and all oscillators fire with their natural periods T . For weak coupling, each oscillator still approximately fires at the unperturbed rate but now the phases slowly drift according to equation (3.5) since $X_i(t) = \mathcal{O}(\epsilon)$. To first order in ϵ , we can take the firing-times to be $T_j^n = (n - \psi_j(t))T$. Under this approximation, equations (3.2) and (3.5) lead to the following equation for the shifted phases $\theta_i(t) = \psi_i(t) + t/T$:

$$\frac{d\theta_i}{dt} = \frac{1}{T} + \epsilon \sum_{j=1}^N W_{ij} R_T(\theta_i) P_T(\theta_j) + \mathcal{O}(\epsilon^2) \quad (3.7)$$

where $P_T(\theta + 1) = P_T(\theta)$ for all θ and

$$P_T(\theta) = \sum_{m=-\infty}^{\infty} J((\theta + m)T), \quad 0 \leq \theta < 1 \quad (3.8)$$

The summation over m in equation (3.8) is easily performed for $J(\tau)$ satisfying equation (3.3) and gives $P_T(\theta) = \hat{J}_T(\theta - \tau_a/T)$ where $\hat{J}_T(\theta)$ is a periodic function of θ with

$$\hat{J}_T(\theta) = \frac{\alpha^2 e^{-\alpha\theta T}}{1 - e^{-\alpha T}} \left[\theta T + \frac{T e^{-\alpha T}}{1 - e^{-\alpha T}} \right], \quad 0 \leq \theta < 1 \quad (3.9)$$

The function R_T may be interpreted as the phase-response curve (PRC) of an individual IF oscillator and P_T is the corresponding pulse-like function that contains all details concerning the synaptic interactions. Note that phase equations of the form (3.7) can also be derived for a system of weakly-coupled limit cycle oscillators based on more detailed biophysical models such as Hodgkin-Huxley neurons (Ermentrout and Kopell 1984; Kuramoto 1984; Hansel *et al* 1995). As discussed in some detail by Hansel *et al* (1995), linear IF oscillators have a type I PRC, which means that an instantaneous excitatory stimulus always advances its phase ($R_T(\theta)$ is positive for all θ). On the other hand, Hodgkin-Huxley neurons are of type II since a stimulus can either advance or retard the phase depending upon the point on the cycle at which the stimulus is applied ($R_T(\theta)$ takes on both positive and negative values over the domain $\theta \in [0, 1]$). Equation (3.7) can be simplified further by averaging over the natural period T . This leads to an equation of the form

$$\frac{d\theta_i}{dt} = \omega + \epsilon \sum_{j=1}^N W_{ij} H_T(\theta_j - \theta_i) + \mathcal{O}(\epsilon^2) \quad (3.10)$$

with $\omega = 1/T$ and

$$H_T(\phi) = \int_0^1 R_T(\theta) P_T(\theta + \phi) d\theta \quad (3.11)$$

For positive kernels $J(\tau)$, the interaction function $H_T(\phi)$ is positive for all ϕ since IF oscillators are of type I. However, it is possible to mimic an effective type II interaction function by introducing a combination of excitatory and inhibitory interactions between the IF neurons in the definition of $J(\tau)$ (Bressloff and Coombes 1998b). To illustrate this idea, suppose that we decompose $J(\tau)$ as

$$J(\tau) = J_+(\tau) - J_-(\tau), \quad J_{\pm}(\tau) = s_{\pm}(\tau - \tau_{\pm})\Theta(\tau - \tau_{\pm}), \quad s_{\pm}(\tau) = \alpha_{\pm}^2 \tau e^{-\alpha_{\pm}\tau} \quad (3.12)$$

where $J_{\pm}(\tau)$ represent α functions for excitatory (+) and inhibitory (−) synapses. Assuming that the inhibitory pathways are delayed with respect to the excitatory ones ($\tau_- > \tau_+$) then the effective interaction function of an IF oscillator can be approximately sinusoidal. This is illustrated in Fig. 1. It is not clear that such a combination of synapses is directly

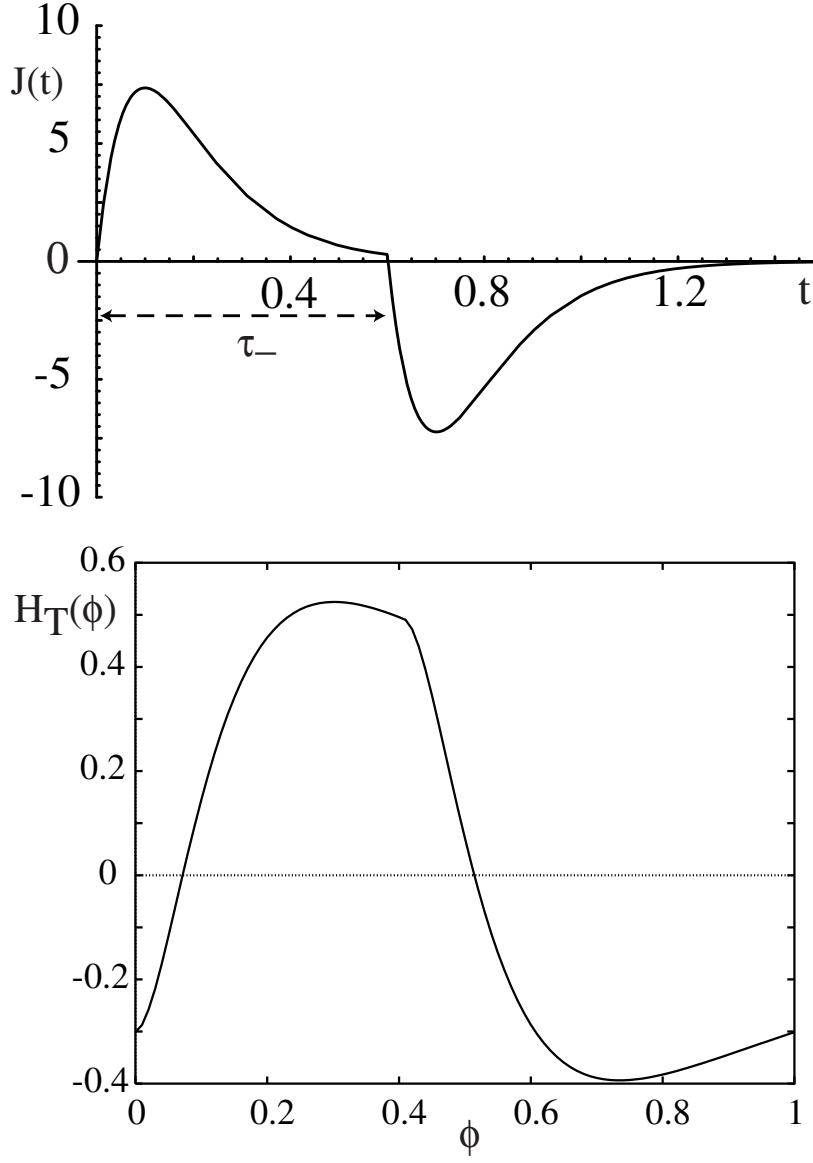


Figure 1: (a) Delay kernel $J(t)$ and (b) associated interaction function $H_T(\phi)$ for a combination of excitatory and delayed inhibitory synaptic interactions given by equation (3.12). Here $\alpha_{\pm} = 10$, $\tau_+ = 0$, $\tau_- = 0.6$ and $T = \ln 2$.

realised in cortical microcircuits. However, it is known that recurrent excitatory connections also stimulate inhibitory interneurons, and this might lead to an effective delay kernel of the form (3.14) at the population level.

We define a phase-locked solution of equation (3.10) to be of the form $\theta_i(t) = \phi_i + \Omega t$, where ϕ_i is a constant phase and $\Omega = 1/T + \mathcal{O}(\epsilon)$ is the collective frequency of the coupled oscillators. Substitution of this solution into equation (3.10) and working to $\mathcal{O}(\epsilon)$ leads to the fixed point equations

$$\Omega = \frac{1}{T} + \epsilon \sum_{j=1}^N W_{ij} H_T(\phi_j - \phi_i) \quad (3.13)$$

After choosing some reference oscillator, the N equations (3.13) determine the collective period Ω and $N - 1$ relative phases with the latter independent of ϵ . In order to analyze the local stability of a phase-locked solution $\Phi = (\phi_1, \dots, \phi_N)$, we linearize equation (3.10) by setting $\theta_i(t) = \phi_i + \Omega t + \tilde{\theta}_i(t)$ and expanding to first-order in $\tilde{\theta}_i$:

$$\frac{d\tilde{\theta}_i}{dt} = \epsilon \sum_{j=1}^N \hat{\mathcal{H}}_{ij}(\Phi) \tilde{\theta}_j \quad (3.14)$$

where

$$\hat{\mathcal{H}}_{ij}(\Phi) = \mathcal{H}_{ij}(\Phi) - \delta_{i,j} \sum_{k=1}^N \mathcal{H}_{ik}(\Phi), \quad \mathcal{H}_{ij}(\Phi) = W_{ij} H'_T(\phi_j - \phi_i) \quad (3.15)$$

and $H'_T(\phi) = dH_T(\phi)/d\phi$. One of the eigenvalues of the Jacobian $\hat{\mathcal{H}}$ is always zero, and the corresponding eigenvector points in the direction of the flow, that is $(1, 1, \dots, 1)$. The phase-locked solution will be stable provided that all other eigenvalues have a negative real part (Ermentrout 1985).

The existence and stability of phase-locked solutions in the case of a symmetric pair of excitatory or inhibitory IF neurons with synaptic interactions has been studied in some detail by van Vreeswijk *et al* (1994). In this particular case, $N = 2$ and $W_{11} = W_{22} = 0$, $W_{12} = W_{21} = 1$. Equation (3.13) then shows that the allowed solutions for the relative phase $\phi = \phi_2 - \phi_1$ are given by the zeroes of the odd interaction function $H_T^-(\phi) = H_T(\phi) - H_T(-\phi)$. The underlying symmetry of the pair of neurons guarantees the existence of the *in-phase* or synchronous solution $\phi = 0$ and the *anti-phase* or anti-synchronous solution $\phi = 1/2$. Suppose that $\tau_a = 0$. For small α one finds that the in-phase and anti-phase solutions are the only phase-locked solutions. However, as α is increased, a critical value α_c is reached where there is a bifurcation of the anti-phase solution leading to the creation of two partially synchronized states θ and $1 - \theta$, with

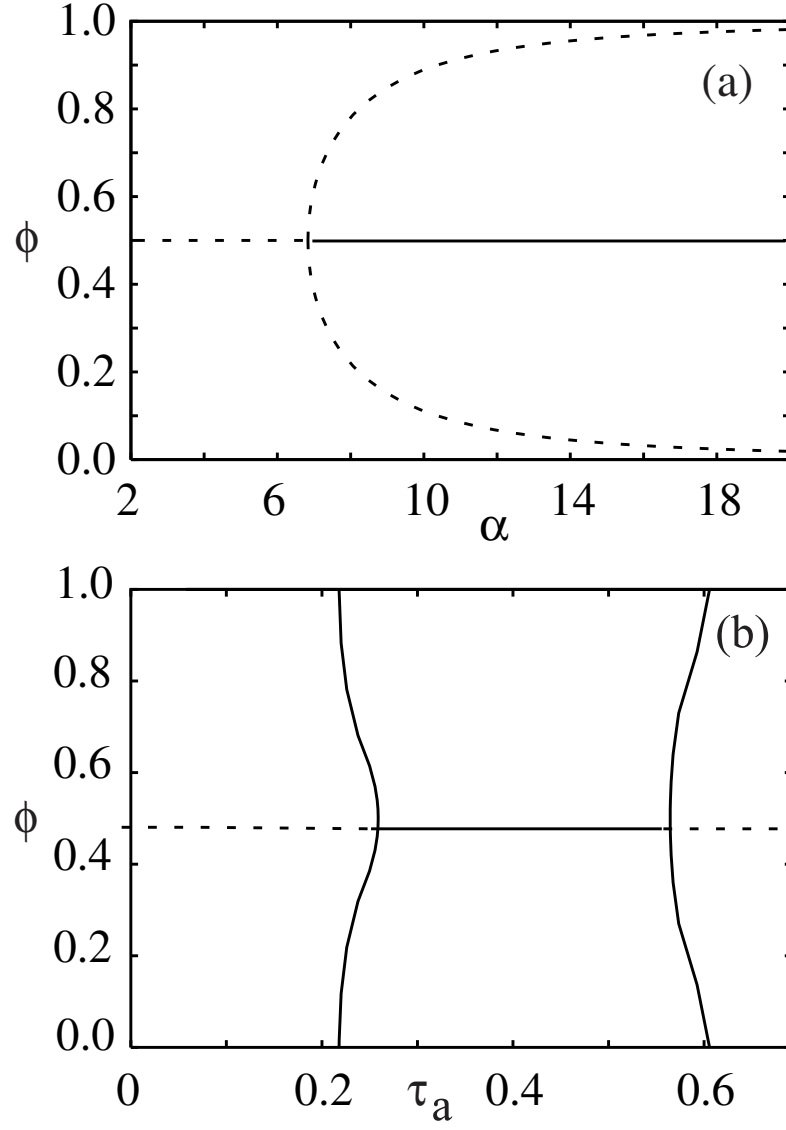


Figure 2: (a) Relative phase $\phi = \phi_2 - \phi_1$ for a pair of IF oscillators with symmetric inhibitory coupling as a function of α with $I = 2$. In each case the anti-phase state undergoes a bifurcation at a critical value of $\alpha = \alpha_c$ where it becomes stable and two additional unstable solutions ϕ , $1 - \phi$ are created. The synchronous state remains stable for all α . (b) Relative phase ϕ vs. discrete delay τ_a for a pair of pulse-coupled integrate-and-fire oscillators with $I = 2$ and $\alpha = 2$.

$0 < \theta < 1/2$ and $\theta \rightarrow 0$ as $\alpha \rightarrow \infty$ (see Fig. 2a and van Vreeswijk *et al* 1994). As shown by Coombes and Lord (1997), variation of τ_a for fixed α produces a checkerboard pattern of alternating stable/unstable solution branches (see Fig. 2b) that can overlap to produce multistable solutions. Using equation (3.15) one obtains the following necessary and sufficient condition for local asymptotic stability of a phase-locked state in the weak coupling regime:

$$\epsilon \frac{dH_T^-(\phi)}{d\phi} > 0 \quad (3.16)$$

One finds that for $\tau_a = 0$ and inhibitory coupling ($\epsilon < 0$) the synchronous state is stable for all $0 < \alpha < \infty$. Moreover, the anti-phase solution $\phi = 1/2$ is unstable for $\alpha < \alpha_c$ but it gains stability when $\alpha > \alpha_c$ with the creation of two unstable partially synchronized states. The stability properties of all solutions are reversed in the case of excitatory coupling ($\epsilon > 0$) so that, in particular, the synchronous state is now unstable for all α . If the discrete delay τ_a is increased from zero, then alternating bands of stability and instability are created. An example of such regions is displayed in Fig. 3. The corresponding stability diagram for the anti-synchronous state may be obtained by shifting the delay according to $\tau_a \rightarrow \tau_a + T/2$.

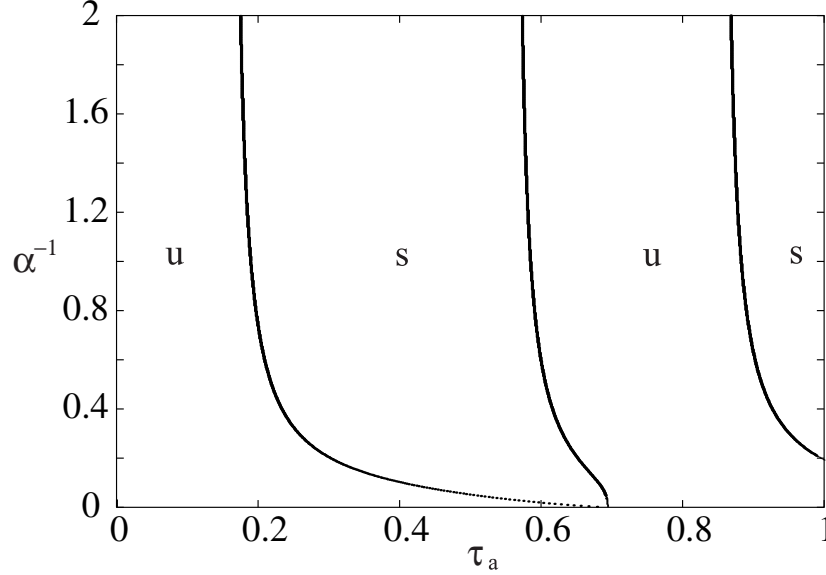


Figure 3: Stability of the synchronous solution $\phi = 0$ as a function of α^{-1} and τ_a for weak excitatory coupling with $I = 2$. Stable and unstable regions are denoted by s and u respectively. The stability diagrams are periodic in τ_a with period $\ln[I/(I-1)]$. (This periodicity would be distorted in the strong coupling regime since the collective period of oscillation depends upon the strength of coupling).

3.2 Slow synapses: analog models

A second approximation scheme for analyzing IF network dynamics is to assume that the synaptic interactions are sufficiently slow so that the output of a neuron can be characterized reasonably well by a mean (time-averaged) firing rate (see for example Amit and Tsodyks 1991; Ermentrout 1994). Therefore, let us consider the case in which $J(\tau)$ is given by the alpha function (3.3) with a synaptic rise time α^{-1} significantly longer than all other time-scales in the system. Suppose that the total synaptic current $X_i(t)$ to neuron i is described by a slowly varying function of time t . If the neuronal dynamics is fast relative to α^{-1} then the actual firing rate $E_i(t)$ of a neuron will quickly relax to approximately its steady state value. That is,

$$E_i(t) = f(X_i(t) + I_i) \quad (3.17)$$

where, from equation (3.1), the firing rate function f is of the form

$$f(X) = \left\{ \ln \left[\frac{X}{X-1} \right] \right\}^{-1} \Theta(X-1) \quad (3.18)$$

(Note that we have ignored the effects of absolute refractory period, which is reasonable when the system is operating well below its optimal firing rate). Equation (3.17) relates the dynamics of the firing rate directly to the stimulus dynamics $X_i(t)$ through the steady-state response function. In effect, the use of a slowly varying kernel $J(\tau)$ allows a consistent definition of the firing rate so that a dynamical network model can be based upon the steady state properties of an isolated neuron.

Within the above approximation we can derive a closed set of equations for the synaptic currents $X_i(t)$. This is achieved by rewriting equation (3.2) as a pair of differential equations that generate the alpha function $s(t)$ of equation (3.3), and replacing the output spike train of a neuron by the firing-rate function (3.18):

$$\alpha^{-1} \frac{dX_i(t)}{dt} + X_i(t) = Y_i(t), \quad (3.19)$$

$$\alpha^{-1} \frac{dY_i(t)}{dt} + Y_i(t) = \epsilon \sum_{j=1}^N W_{ij} E_j(t - \tau_a) \quad (3.20)$$

Here $Y_i(t)$ is an auxiliary current.

As mentioned in the introduction, a common starting point for the analysis of analog models is to consider conditions under which destabilization of a homogeneous low

activity state occurs leading to the formation of a state with inhomogeneous and/or time-dependent firing rates (see Ermentrout 1998 for a review). To simplify our analysis, we shall impose the following condition on the external bias I_i :

$$I = I_i + \epsilon f(I) \sum_{j=1}^N W_{ij} \quad (3.21)$$

for some fixed $I > 1$. Then for sufficiently weak coupling, $|\epsilon| \ll 1$, the analog model has a single stable fixed point given by $Y_i = X_i = \epsilon f(I) \sum_j W_{ij}$ such that the firing-rates are kept at the value $f(I)$. Suppose that we linearize equations (3.19) and (3.20) about this fixed point and substitute into the linearized equations a solution of the form $(X_k(t), Y_k(t)) = e^{\lambda t}(\bar{X}_k, \bar{Y}_k)$. This leads to the eigenvalue equation

$$\frac{\lambda_p^\pm}{\alpha} = -1 \pm \sqrt{\epsilon f'(I) \nu_p} e^{-\lambda_p^\pm \tau_a/2}, \quad p = 1, \dots, N. \quad (3.22)$$

where ν_p , $p = 1, \dots, N$, are the eigenvalues of the weight matrix $\mathbf{W}$. The fixed point will be asymptotically stable if and only if $\text{Re } \nu_p < 0$ for all p . As $|\epsilon|$ is increased from zero, an instability may occur in at least two distinct ways. If a single real eigenvalue λ crosses the origin in the complex λ -plane then a static bifurcation can occur leading to the emergence of additional fixed point solutions which correspond to inhomogeneous firing rates. For example, if $\epsilon > 0$ and $\mathbf{W}$ has real eigenvalues $\nu_1 > \nu_2 > \dots > \nu_N$ with $\nu_1 > 0$ then a static bifurcation will occur at the critical coupling ϵ_c for which $\lambda_1^+ = 0$, that is, $1 = \sqrt{\epsilon_c f'(I) \nu_1}$. On the other hand, if a pair of complex conjugate eigenvalues $\lambda = \lambda_R \pm i\lambda_I$ crosses the imaginary axis ($\lambda_R = 0$) from left to right in the complex plane then a Hopf bifurcation can occur leading to the formation of periodic solutions, that is, time-dependent firing rates. For example, suppose that $\tau_a = 0$ and $\mathbf{W}$ has a pair of complex eigenvalues (ν, ν^*) with $\nu = re^{i\theta}$ and $0 < \theta < \pi$. Denote the corresponding solutions of (3.22) by $(\lambda_\pm, \lambda_\pm^*)$. Assuming that all other eigenvalues λ have negative real part, a Hopf bifurcation will occur at the critical coupling ϵ_c for which $\text{Re } \lambda_+ = 0$, that is, $1 = \sqrt{\epsilon_c f'(I) r} \cos(\theta/2)$. An alternative way of generating oscillatory solutions is to have non-zero delays τ_a (Marcus and Westervelt 1989). Note that the basic stability results are independent of the inverse rise-time α .

To illustrate the above, consider a symmetric pair of analog neurons with inhibitory coupling, $\epsilon < 0$, and $W_{11} = W_{22} = 0$, $W_{12} = W_{21} = 1$. The weight matrix $\mathbf{W}$ has eigenvalues ± 1 and eigenmodes $(1, \pm 1)$. Let $x_i = X_i - \epsilon f(I)$ so that the fixed point equations become $x_1 = \epsilon f(x_2 + I) - \epsilon f(I)$ and $x_2 = \epsilon f(x_1 + I) - \epsilon f(I)$. One solution is the homogeneous fixed point $x_i = 0$. A full bifurcation diagram showing the location of the fixed points x_1 as a function of $|\epsilon|$ is shown in Fig. 4a. The homogeneous fixed point

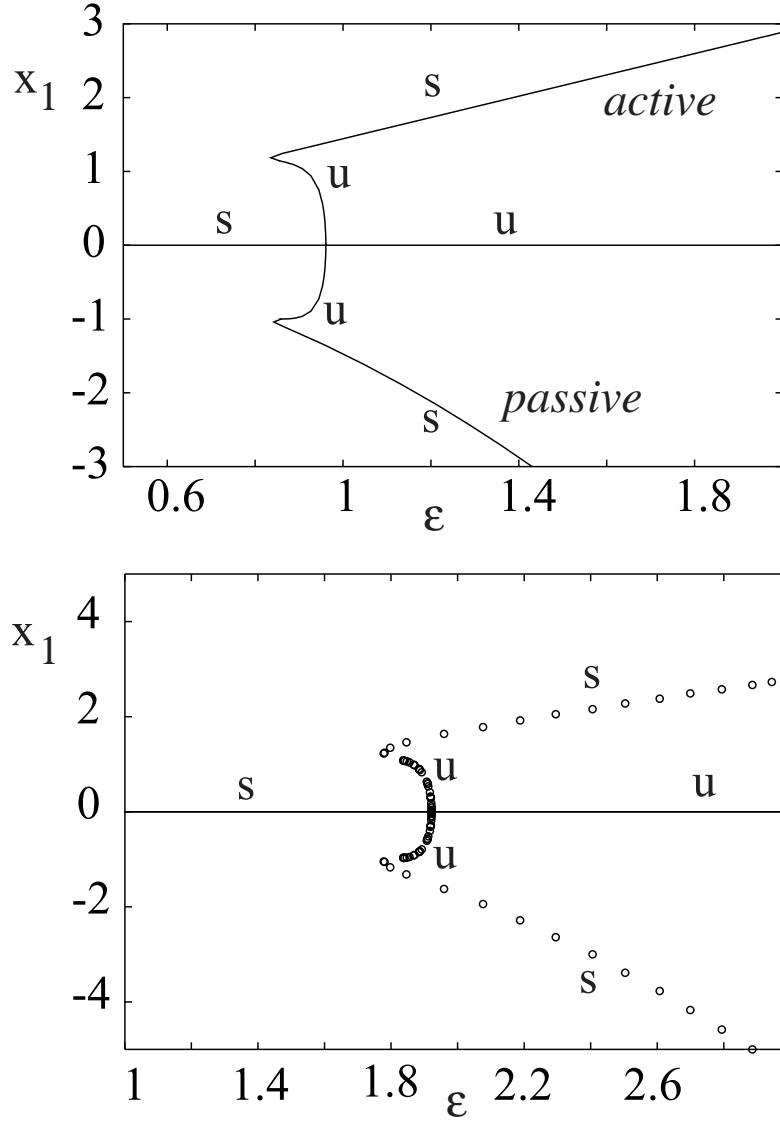


Figure 4: (a) Bifurcation diagram for a pair of analog neurons with symmetric inhibitory coupling and external input $I = 2$. (b) Subcritical Hopf bifurcation for a pair of analog oscillators with self-interactions. $\alpha = 0.5$, $I = 2$, $W_{11} = W_{22} = 0$, $W_{21} = 1$ and $W_{12} = -2$. Open circles denote the amplitude of the resulting limit cycle from the Hopf bifurcation point $\epsilon \approx 2.0$. Also 's' ('u') stands for stable (unstable) dynamics.

$x_i = 0$ is stable for sufficiently small coupling $|\epsilon|$ but destabilizes at the critical point $|\epsilon| = \epsilon_c$ with $\epsilon_c = 1/f'(I)$, where it coalesces with two unstable fixed points. For $|\epsilon| > \epsilon_c$, the unstable fixed point at the origin coexists with two stable fixed points (arising from saddle node bifurcations). One finds that just beyond the bifurcation point, the system jumps from a homogeneous state to a state in which one neuron is active with a constant firing rate $f(I - \epsilon f(I))$ and the other is passive with zero firing rate. Note that a pair of excitatory analog neurons would bifurcate into another homogeneous state. For example, since I_i has to decrease to keep the firing-rate constant when $\epsilon > 0$ (see equation (3.21), for strong enough coupling $I_i < 1$ so that the quiescent state is also a valid solution.

A well known result from the analysis of analog neurons is that an excitatory-inhibitory pair can undergo a Hopf bifurcation to an oscillatory solution (Atiya and Baldi 1989). As an illustration, consider the case $\epsilon > 0$, $\tau_a = 0$ and $W_{11} = W_{22} = 0$, $W_{12} = -2$, $W_{21} = 1$. Here neuron 2 inhibits neuron 1 whereas neuron 1 excites neuron 2. The eigenvalues of the weight matrix are $\pm i$ so that a Hopf bifurcation arises as ϵ is increased. (See the discussion below equation (3.22)). Let $x_1 = X_1 + 2\epsilon f(I)$ and $x_2 = X_2 - \epsilon f(I)$ so that there exists a fixed point at $x_i = 0$. The bifurcation diagram for the amplitude x_1 as a function of ϵ is shown in figure 4b. It can be seen that the system undergoes a so-called subcritical Hopf bifurcation in which the homogeneous fixed point $x_i = 0$ becomes unstable and the system jumps to a co-existing stable limit cycle signalling a solution with periodic firing rates. This form of jump is often referred to as a *hard excitation*. The system also exhibits hysteresis. It is interesting to note that if the firing rate function $f(X)$ of equation (3.18) were taken to be the usual smooth sigmoid function then, for the given weights, the Hopf bifurcation would be supercritical in the sense that the limit cycle would grow smoothly from the unstable fixed point so that there is no jump phenomenon nor hysteresis. This is called a *soft excitation*. (See Atiya and Baldi (1989)). Another important point is that if the analog model were described by a first-order equation rather than a second-order equation (as given by (3.19) and (3.20)), then it would be necessary to introduce additional self-interactions ($W_{12}, W_{21} \neq 0$) in order for a Hopf bifurcation to occur. This is difficult to justify on neurobiological grounds. (A first-order equation would be obtained if the delay kernel were taken to be an exponential function rather than the alpha function (3.3)). We shall return to this particular issue in section 4.6.

4 Spike train dynamics in the strong-coupling regime

Recall from section 3 that networks of weakly coupled IF neurons can have stable phase-locked solutions in which all the neurons have the same constant inter-spike interval (ISI).

On the other hand, a strongly coupled network of analog neurons can bifurcate from a stable homogeneous state with identical time-independent firing rates to a state with inhomogeneous and/or time-varying firing rates. (Note that an homogeneous state of the analog model does not distinguish between different phase-locked solutions since all phase information is lost during time-averaging). This suggests that there should exist some mechanism for destabilizing phase-locked solutions of the IF model in the strong coupling regime. Here we identify such a mechanism based on a discrete bifurcation of the firing times. This induces spatio-temporal variations in the ISIs, which supports a variety of complex dynamics including oscillator death (section 4.3), bursting (section 4.4) and pattern formation (section 4.5).

4.1 Phase-locking for arbitrary coupling

An important simplifying aspect of the dynamics of pulse-coupled (linear) IF neurons is that it is possible to derive phase-locking equations without the assumption of weak coupling (van Vreeswijk *et al* 1994; Bressloff *et al* 1997; Bressloff and Coombes 1998a). This can be achieved by solving equation (3.1) directly under the ansatz that the firing times are of the form $T_j^n = (n - \phi_j)\bar{T}$ for some self-consistent period $\bar{T}$ and constant phases ϕ_j . Integrating equation (3.1) over the interval $t \in (-\bar{T}\phi_i, \bar{T} - \bar{T}\phi_i)$ and incorporating the reset condition by setting $U_i(-\phi_i\bar{T}) = 0$ and $U_i(\bar{T} - \phi_i\bar{T}) = 1$ then leads to the result

$$1 = (1 - e^{-\bar{T}})I_i + \epsilon \sum_{j=1}^N W_{ij} K_{\bar{T}}(\phi_j - \phi_i) \quad (4.1)$$

where

$$K_T(\phi) = e^{-T} \int_0^T e^{\tau} \sum_{m=-\infty}^{\infty} J(\tau + (m + \phi)T) d\tau = \frac{T^2 e^{-T}}{(1 - e^{-T})} H_T(\phi) \quad (4.2)$$

It can be seen that equation (4.1) has an identical structure to that of equation (3.13) and involves the same phase interaction function (up to a multiplicative factor). Indeed, in the weak coupling regime with $I_i = I$ for all i , equation (4.1) reduces to (3.13) with $1/\bar{T} = \Omega$. This means that techniques previously developed for studying phase-locking in weakly-coupled oscillator networks can be extended to strongly-coupled IF networks. For example, in the case of a ring of identical IF oscillators with symmetric coupling group theoretic methods can be used to classify all phase-locked solutions and to construct bifurcation diagrams showing how new solution branches emerge via spontaneous symmetry breaking (Bressloff *et al* 1997; Bressloff and Coombes 1998a). Furthermore, in the case of a finite chain of IF oscillators with a gradient of external inputs and sinusoidal-like

phase interaction functions of the form shown in Fig. 1, one can establish the existence of “traveling wave” solutions in which the phase varies monotonically along the chain (except in some narrow boundary layer); such systems can be used to model locomotion in simple vertebrates (Bressloff and Coombes 1998b).

There are, however, a number of significant differences between the phase-locking equations (3.13) and (4.1). First, equation (4.1) is exact whereas equation (3.13) is only valid to $\mathcal{O}(\epsilon)$ since it is derived under the assumption of weak coupling. Second, the collective period of oscillations $\bar{T}$ must be determined self-consistently in equation (4.1). Assume for the moment that $\bar{T}$ is given. Suppose that we choose θ_1 as a reference oscillator and subtract from equation (4.1) for $i = 2, \dots, N$ the corresponding equation for $i = 1$. This leads to $N - 1$ fixed point equations for the $N - 1$ relative phases $\hat{\phi}_j = \phi_j - \phi_1$, $j = 2, \dots, N$, which for $I_i = I$ take the form

$$0 = \sum_{j=1}^N W_{ij} K_{\bar{T}}(\hat{\phi}_j - \hat{\phi}_i) - \sum_{j=1}^N W_{1j} K_{\bar{T}}(\hat{\phi}_j)$$

where $\hat{\phi}_1 \equiv 0$. The resulting solutions for $\hat{\phi}_j$, $j = 2, \dots, N$, are functions of $\bar{T}$ which can then be substituted back into equation (4.1) for $i = 1$ to give an implicit self-consistency condition for $\bar{T}$. The analysis is considerably simpler in the weak coupling regime since the relative phases are then functions of the natural period T . The third difference between weak and strong coupling is that, although the equations for phase locking in the two models are formally the same, the underlying dynamical systems are distinct thus leading to differences in their stability properties. For example, in the special case of a pair of IF neurons, a return map argument can be used to show that equation (3.16) with T replaced by the collective period $\bar{T}$ is a necessary condition for the stability of a phase-locked state for any ϵ (van Vreeswijk *et al* 1994). However, as we shall establish below, it is no longer a sufficient condition for stability in the strong coupling regime. (See also Chow 1998).

4.2 Desynchronization in the strong coupling regime

In order to investigate the linear stability of phase-locked solutions of equation (4.1) we consider perturbations δ_i^n of the firing times (van Vreeswijk 1996; Gerstner *et al* 1996; Bressloff and Coombes 1998a). That is, we set $T_i^n = (n - \phi_i)\bar{T} + \delta_i^n$ in equation (3.2), and then integrate equation (3.1) from T_i^n to T_i^{n+1} using the reset condition. This leads to a mapping of the firing times that can be expanded to first order in the perturbations

(Bressloff and Coombes 1998a):

$$\begin{aligned} & \left\{ I_i - 1 + \epsilon \sum_{j=1}^N W_{ij} P_{\bar{T}}(\phi_j - \phi_i) \right\} [\delta_i^{n+1} - \delta_i^n] \\ &= \epsilon \sum_{j=1}^N W_{ij} \sum_{m=-\infty}^{\infty} G_m(\phi_j - \phi_i, \bar{T}) [\delta_j^{n-m} - \delta_i^n] \end{aligned} \quad (4.3)$$

where P_T satisfies equation (3.8) and

$$G_m(\phi, T) = \frac{e^{-T}}{T} \int_0^T e^t J'(t + (m + \phi)T) dt \quad (4.4)$$

The linear delay-difference equation (4.3) has solutions of the form $\delta_j^n = e^{n\lambda} \delta_j$ with $0 \leq \text{Im}(\lambda) < 2\pi$. The eigenvalues λ and eigenvectors $(\delta_1, \dots, \delta_N)$ satisfy the equation

$$\begin{aligned} \left[I_i - 1 + \epsilon \sum_{j=1}^N W_{ij} P_{\bar{T}}(\phi_j - \phi_i) \right] (e^\lambda - 1) \delta_i &= \epsilon \sum_{j=1}^N W_{ij} G_{\bar{T}}(\phi_j - \phi_i, \lambda) \delta_j \\ &\quad - \epsilon \sum_{j=1}^N W_{ij} G_{\bar{T}}(\phi_j - \phi_i, 0) \delta_i \end{aligned} \quad (4.5)$$

with

$$G_T(\phi, \lambda) = \sum_{m=-\infty}^{\infty} e^{-m\lambda} G_m(\phi, T) \quad (4.6)$$

One solution to equation (4.5) is $\lambda = 0$ with $\delta_i = \delta$ for all $i = 1, \dots, N$. This reflects the invariance of the dynamics with respect to uniform phase-shifts in the firing-times, $T_i^n \rightarrow T_i^n + \delta$. Thus the condition for linear stability of a phase-locked state is that all remaining solutions λ of equation (4.5) have negative real part. This ensures that $\delta_j^n \rightarrow 0$ as $n \rightarrow \infty$ and, hence, that the phase-locked solution is asymptotically stable. By performing an expansion in powers of the coupling ϵ it can be established that for sufficiently small coupling, equation (4.5) yields a stability condition that is equivalent to the one based on the Jacobian of the phase-averaged model, equations (3.14) and (3.15). (See Bressloff and Coombes 1998a). We wish to determine whether or not this stability condition breaks down as $|\epsilon|$ is increased (with the sign of ϵ fixed).

For concreteness, we shall focus on the stability of synchronous solutions. In order to ensure that such solutions exist, we impose the condition

$$I_i = I \left[1 - \epsilon K_T(0) \sum_{j=1}^N W_{ij} \right], \quad i = 1, \dots, N \quad (4.7)$$

for some fixed $I > 1$ and $T = \ln[I/(I-1)]$. The condition on I_i for the IF model plays an analogous role to equation (3.21) for the analog model in section 3.2. The synchronous state $\phi_i = \phi$ for all i and arbitrary ϕ is then a solution of equation (4.1) with collective period T . By fixing T we can make a more direct comparison with the analog model whose fixed point at the origin will have a firing rate $f(I) = 1/T$ in equation (3.18). Define the matrix $\widehat{\mathbf{W}}$ according to

$$\widehat{W}_{ij} = W_{ij} - \delta_{i,j} \sum_{k=1}^N W_{ik} \quad (4.8)$$

For sufficiently weak coupling, equations (3.14), (3.15) and (4.2) imply that the synchronous state is linearly stable if and only if

$$\epsilon K'_T(0) \text{Re}[\widehat{\nu}_p] < 0, \quad p = 1, \dots, N-1 \quad (4.9)$$

where $\widehat{\nu}_p$, $p = 1, \dots, N$ are the eigenvalues of the matrix $\widehat{\mathbf{W}}$ with $\widehat{\nu}_N = 0$, and $K'_T(\theta) = T^{-1}dK_T(\theta)/d\theta$. In the particular case of a symmetric pair of neurons, equation (4.9) reduces to the condition $\epsilon K'_T(0) > 0$, which is equivalent to equation (3.16) for $\phi = 0$. (The case $\phi \neq 0$ is obtained in exactly the same fashion). It follows that the stability diagram of Fig. 3 displays the sign of $K'_T(0)$ as a function of α and τ_a . For example, in the case of zero axonal delays ($\tau_a = 0$), Fig. 3 implies that $K'_T(0) < 0$ for all finite α and T , and equation (4.9) reduces to the stability condition $\epsilon \text{Re} \widehat{\nu}_p > 0$ for all $p = 1, \dots, N-1$.

The stability of the synchronous state for weak coupling implies that the zero eigenvalue is non-degenerate and all other eigenvalues λ satisfying equation (4.5) have negative real parts. As the coupling strength $|\epsilon|$ is increased from zero, destabilization of the synchronous state will be signalled by one or more complex conjugate pairs of eigenvalues crossing the imaginary axis in the complex λ -plane from left to right. (It is simple to establish that the synchronous state cannot destabilize due to a real eigenvalue crossing the origin by setting $\lambda = 0$ in equation (4.5)). We proceed, therefore, by substituting $\phi_i = \phi$, $i = 1, \dots, N$ and imposing the condition (4.7). Equation (4.5) reduces to the form

$$[(e^\lambda - 1)(I - 1 + \epsilon \Gamma_i I K'_T(0)) + \epsilon \Gamma_i K'_T(0)] \delta_i = \epsilon G_T(0, \lambda) \sum_{j=1}^N W_{ij} \delta_j \quad (4.10)$$

where $\Gamma_i = \sum_{j=1}^N W_{ij}$. We have used the identities $P_T(0) - IK_T(0) = IK'_T(0)$ and $G_T(0, 0) = K'_T(0)$. We then substitute $\lambda = i\beta$ into equation (4.10) and look for the smallest value of the coupling strength, $|\epsilon| = \epsilon_c$ for which a real solution β exists. This determines the point at which the synchronous state becomes unstable. If $\beta \neq \pi$ we have a Hopf bifurcation whereas if $\beta = \pi$ we have a period doubling bifurcation. Note that in

the special case that Γ_i is independent of i , equation (4.10) can be simplified by choosing δ_i to lie along one of the eigenvectors of the weight matrix $\mathbf{W}$.

We shall explore the nature of the above instability through a number of specific examples. We shall also establish that for slow synapses the strong coupling behavior of the IF model is consistent with that of the mean firing rate model of section 3.2 (on an appropriately defined time-scale). In order to compare the two types of model, it will be useful to introduce a few definitions. For a network of N IF neurons labeled $i = 1, \dots, N$, let us define the long-term firing rate of a neuron to be $a_i = \overline{\Delta}_i^{-1}$, where $\overline{\Delta}_i$ is the mean ISI,

$$\overline{\Delta}_i = \lim_{M \rightarrow \infty} \frac{1}{2M+1} \sum_{m=-M}^M \Delta_i^m \quad (4.11)$$

with $\Delta_i^m = T_i^{m+1} - T_i^m$. A necessary requirement for good agreement between the analog and IF models is that the mean firing rates a_i of the IF model match the corresponding firing rates of the analog model. In general, one would also expect to observe fluctuations in the ISIs of the IF network that are not resolved by the analog model. In cases where the analog model bifurcates to a state with time-independent firing rates, we expect the orbits of the ISIs to be small relative to the firing period, at least for slow synapses. That is, $|\Delta_i^m - \overline{\Delta}_i|/\overline{\Delta}_i \ll 1$ for all i, m . (See the example of pattern formation in section 4.5, in particular, Fig. 12). On the other hand, in cases where an analog network destabilizes to a state with time-varying firing rates, we expect the orbits of the ISIs in the IF model to be relatively large. Under such circumstances, we can introduce a sliding window of width $2P+1$ for the IF model in order to define a short-term average firing rate of the form $a_i(m) = \overline{\Delta}_i(m)^{-1}$ where

$$\overline{\Delta}_i(m) = \frac{1}{2P+1} \sum_{p=-P}^P \Delta_i^{m+p}$$

One can then see if there is a good match between the time-dependent firing rates of the two models for an appropriately chosen value of P . Actually, in practice it is simpler to directly compare variations in the firing rate of an analog network with variations in the ISIs of the corresponding IF network (see Fig. 8 in section 4.4).

4.3 Oscillator death in a globally coupled inhibitory network

As our first example illustrating the strong coupling instability identified in section 4.2, we consider a network of N identical IF oscillators with all-to-all inhibitory coupling and no self-interactions. This type of architecture has been used, for example, to model

the reticular thalamic nucleus (RTN), which is thought to act as a pacemaker for synchronous spindle oscillations observed during sleep or anesthesia (Wang and Rinzel 1992; Golomb and Rinzel 1994). In the biophysical model of RTN developed by Wang and Rinzel (1992), neural oscillations are sustained by post-inhibitory rebound, which is a phenomenon whereby a neuron can fire after being hyperpolarized over an extended period and then released. This should be contrasted with our simple IF model in which oscillations are sustained by an external bias. We shall show that for slow synapses desynchronization via a Hopf bifurcation in the firing times occurs, leading to oscillator death in the strong coupling regime, that is, certain cells suppress the activity of others. (See also the recent study of mutually inhibitory Hodgkin-Huxley neurons by White *et al* (1998)).

The weight matrix $\mathbf{W}$ of a globally coupled inhibitory network with $\epsilon < 0$ is given by $W_{ii} = 0$ and $W_{ij} = 1/(N - 1)$ so that $\Gamma_i = 1$ for all $i = 1, \dots, N$. It follows that $\mathbf{W}$ has a non-degenerate eigenvalue $\nu_+ = 1$ with corresponding eigenvector $(1, 1, \dots, 1)$ and an $(N - 1)$ -fold degenerate eigenvalue $\nu_- = -1/(N - 1)$. The eigenvalues of the matrix $\widehat{\mathbf{W}}$, equation (4.8), are $\widehat{\nu}_+ = 0$ and $\widehat{\nu}_- = -N/(N - 1)$ so that the synchronous state is stable in the weak coupling regime provided that $\epsilon K'_T(0) > 0$, see equation (4.9). This is certainly true for zero axonal delays (see Fig. 3). Note that the underlying permutation symmetry of the system means that there are additional phase-locked states in which the neurons are divided into two or more clusters of synchronized cells (Golomb and Rinzel 1994). We shall investigate the stability of the synchronous state as $|\epsilon|$ is increased. Take $(\delta_1, \dots, \delta_N)$ in equation (4.10) to be an eigenvector corresponding to either $\nu = \nu_+$ or $\nu = \nu_-$ and set $\lambda = i\beta$. Equating real and imaginary parts then leads to the pair of equations

$$\begin{aligned} \epsilon K'_T(0) + [\cos(\beta) - 1][I - 1 + \epsilon I K'_T(0)] &= \epsilon C(\beta)\nu \\ \sin(\beta)[I - 1 + \epsilon I K'_T(0)] &= -\epsilon S(\beta)\nu \end{aligned} \quad (4.12)$$

where $C(\beta) = \text{Re } G_T(0, i\beta,)$, $S(\beta) = -\text{Im } G_T(0, i\beta)$.

In Fig. 5 we plot the solutions ϵ of equation (4.12) as a function of the inverse rise-time α for a pair of inhibitory neurons ($N = 2$) with $T = \ln 2$ and $\tau_a = 0$. The solid (dashed) solution branch corresponds to the eigenvalue $\nu = -1$ ($\nu = 1$). The lower branch determines the critical coupling $|\epsilon| = \epsilon_c(\alpha)$ for a Hopf instability. An important result that emerges from this figure is that there exists a critical value α_0 of the inverse rise-time beyond which a Hopf bifurcation cannot occur. That is, if $\alpha > \alpha_0$ then the synchronous state remains stable for arbitrarily large inhibitory coupling. On the other hand, for $\alpha < \alpha_0$ destabilization of the synchronous state occurs as the coupling strength ϵ crosses the solid curve of Fig. 5 from below. This signals the activation of the eigenmode

$(\delta_1, \delta_2) = (1, -1)$, which suggest that an inhomogeneous state will be generated. Indeed, direct numerical simulation of the IF model shows that just after destabilization of the synchronous state ($|\epsilon| > \epsilon_c$), the system jumps to an inhomogeneous state consisting of one active neuron and one passive neuron. We conclude that for sufficiently slow synapses a pair of IF neurons displays similar behavior to a corresponding pair of analog neurons in the strong coupling regime (see section 3.2 and Fig. 4a). A rough order estimate for the critical inverse rise-time α_0 is $\alpha_0^{-1} \approx T$ where T is the collective period of oscillations before destabilization. Such a result is not surprising since one would expect that for a reasonable match between the IF and (time-averaged) analog models to occur, the IF neurons should sample incoming spike trains over a sliding window that is not too small. The width of such a sliding window is determined by the rise time α^{-1} .

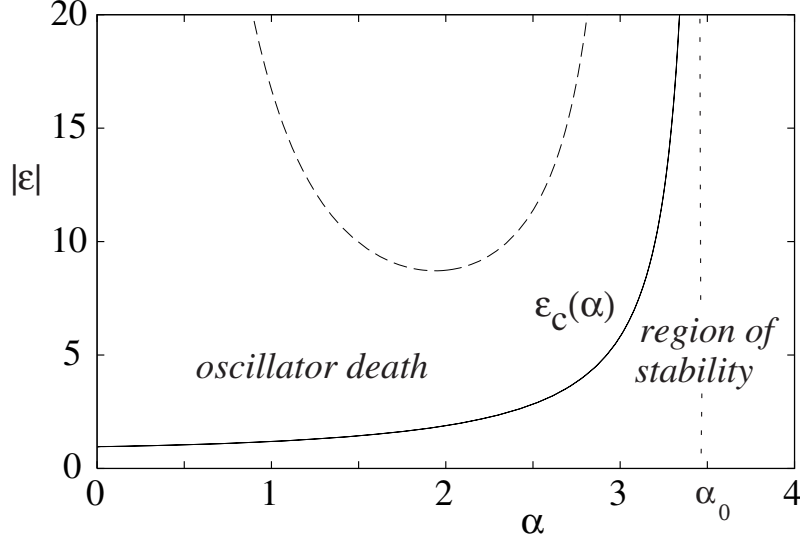


Figure 5: Region of stability for a synchronized pair of identical IF neurons with inhibitory coupling and collective period $T = \ln 2$. The solid curve $|\epsilon| = \epsilon_c(\alpha)$ denotes the boundary of the stability region, which is obtained by solving equation (4.12) for $\nu = -1$ as a function of α with $\tau_a = 0$. Crossing the boundary from below signals excitation of the linear mode $(1, -1)$ leading to a stable state in which one neuron becomes quiescent (oscillator death). For $\alpha > \alpha_0$ the synchronous state is stable for all ϵ . The dashed curve denotes the solution of (4.12) for $\nu = 1$.

The above result appears to be quite general. For example, suppose that we have a non-zero discrete delay τ_a such that the synchronous state is unstable and the anti-phase state is stable for a given α . One finds that the latter state also destabilizes via

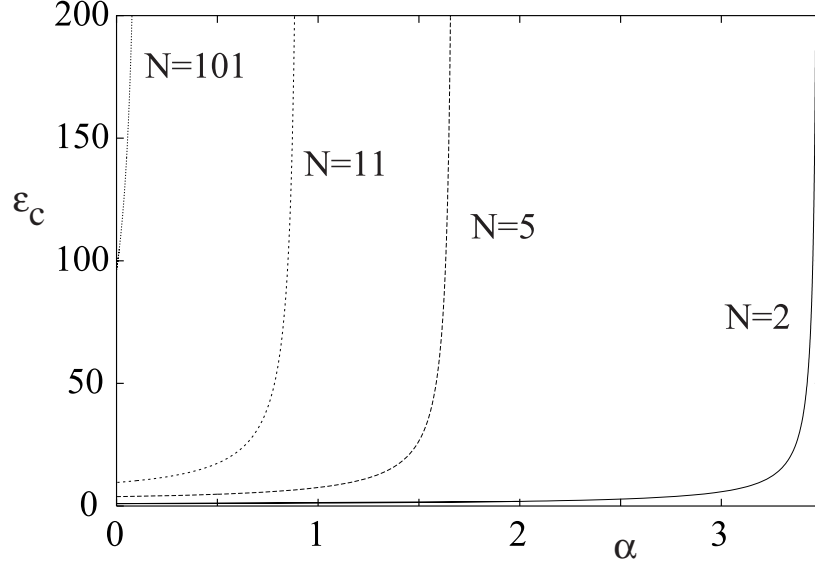


Figure 6: Plot of critical coupling ϵ_c as a function of α for various network sizes N . The critical inverse rise-time $\alpha_0(N)$ is seen to be a decreasing function of N with $\alpha_0(N) \rightarrow 0$ as $N \rightarrow \infty$.

a Hopf bifurcation in the firing times for small α leading to oscillator death. The result also extends to larger values of N for which $\nu_- = -1/(N-1)$ in equation (4.12). Here desynchronization of a phase-locked state leads to clusters of active and passive neurons. Interestingly, the critical value α_0 decreases with N , indicating the greater tendency for phase-locking to occur in large globally-coupled networks. We plot ϵ_c as a function of α for a range of values of network size N in Fig. 6, where it can be seen that $\alpha_0(N) \rightarrow 0$ as $N \rightarrow \infty$. This implies that for large networks, the neurons remain synchronized for arbitrarily large coupling even for slow synapses. Indeed, since real neurons typically have an inverse rise-time α of the order 2 or larger, it follows that for realistic synaptic time constants the network can never experience oscillator death for N larger than 5 or so. (There is one subtlety to be noted here. The dashed solution curve shown in Fig. 5 corresponds to excitation of the uniform mode $(1, 1, \dots, 1)$ and is independent of N . As N increases it is crossed by the curve $\epsilon_c(\alpha)$ so that for a certain range of values of α it is possible for the synchronous state to destabilize due to excitation of the uniform mode. The neurons in the new state will still be synchronized but the spike trains will no longer have a simple periodic structure).

The persistence of synchrony in large networks is consistent with the mode-locking theorem obtained by Gerstner *et al* (1996) in their analysis of the spike response model.

We shall briefly discuss their result within the context of the IF model. For the given globally coupled network, the linearized map of the firing times, equation (4.3), becomes

$$\{I - 1 + \epsilon I K'_T(0)\} [\delta_i^{n+1} - \delta_i^n] = \epsilon \sum_{m=-\infty}^{\infty} G_m(0, T) \left[\frac{1}{N-1} \sum_{j \neq i} \delta_j^{n-m} - \delta_i^n \right] \quad (4.13)$$

The major assumption underlying the analysis of Gerstner *et al* (1996) is that for large N the mean perturbation $\langle \delta^m \rangle = \sum_{j \neq i} \delta_j^m / (N-1) \approx 0$ for all $m \geq 0$ say. Equation (4.13) then simplifies to the one-dimensional, first-order mapping

$$\delta_i^{n+1} = \frac{I - 1 + \epsilon(I-1)K'_T(0)}{I - 1 + \epsilon I K'_T(0)} \delta_i^n \equiv k_T \delta_i^n \quad (4.14)$$

The synchronous (coherent) state will be stable if and only if $|k_T| < 1$. It is instructive to establish explicitly that equation (4.14) is equivalent to the corresponding result derived for the spike response model (see equation (4.8) of Gerstner *et al* (1996)), which in our notation can be written as

$$\delta_i^{n+1} = \frac{\sum_{l \geq 1} h'_r(lT) \delta_i^{n+1-l}}{\sum_{l \geq 1} h'_r(lT) + \epsilon \sum_{l \geq 1} h'_s(lT)} \quad (4.15)$$

Here $h'_r(t) = dh_r(t)/dt$ etc. First, using equations (2.7), (3.3) and (4.2) it can be shown that $\sum_{l \geq 1} h'_r(lT) = e^{-T}/(1 - e^{-T}) = I - 1$ and $\sum_{l \geq 1} h'_s(lT) = I K'_T(0)$. Setting $A(T) = I - 1 + \epsilon I K'_T(0)$, we can then rewrite equation (4.15) as $A(T) \delta_i^{n+1} = \sum_{l \geq 1} e^{-lT} \delta_i^{n+1-l}$. It follows that $A(T) \delta_i^{n+1} - e^{-T} A(T) \delta_i^n = e^{-T} \delta_i^n$, which is identical to equation (4.14) since $e^{-T} = (I - 1)/I$. Equation (4.15) or equation (4.14) implies that the synchronous state is stable in the large N limit provided that $\epsilon \sum_{l \geq 1} h'_s(lT) > 0$, that is, $\epsilon K'_T(0) > 0$ (cf. equation (3.16)). This is the essence of the mode-locking theorem of Gerstner *et al* (1996). Our analysis also highlights one of the simplifying features of the IF model with alpha function response kernels, namely, that the summations over l in equation (4.15) can be performed explicitly. It would be of interest, however, to investigate to what extent the results of this paper carry over to more general choices of h_r and h_s in the construction of the spike response model. We expect that the inclusion of details concerning refractoriness will not alter the basic picture. For oscillator death is also found in a pair of mutually inhibitory Hodgkin-Huxley neurons, as shown by White *et al* (1998) in the case of synapses with first-order channel kinetics, and also confirmed numerically by ourselves in the case of second-order kinetics.

Finally, in other related work, van Vreeswijk (van Vreeswijk 1996) has shown how a network of IF neurons with global excitatory coupling can destabilize from an asynchronous state via a Hopf bifurcation in the firing-times. However, this leads to small

amplitude quasiperiodic variations in the inter-spike intervals of the oscillators (the ISIs lie on relatively small closed orbits). This can be understood by looking at a corresponding network of excitatory analog neurons, which can only bifurcate to another homogeneous time-independent state.

4.4 Bursting in an excitatory-inhibitory pair of IF neurons

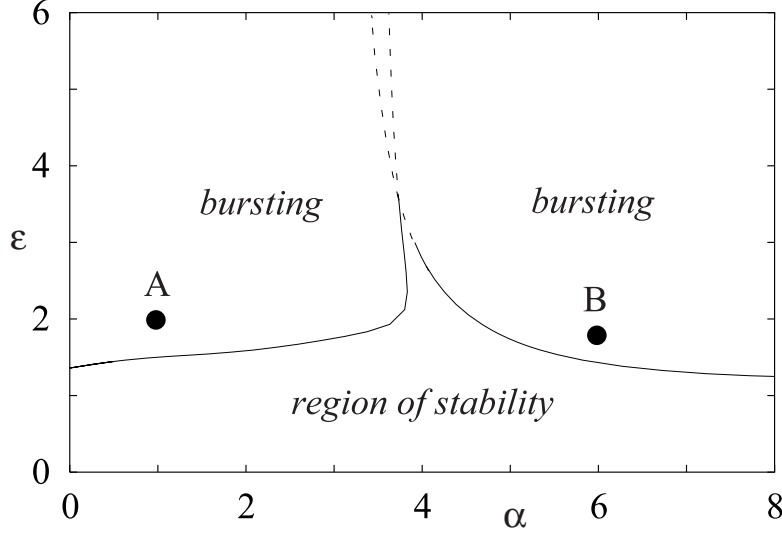


Figure 7: Region of stability for an excitatory-inhibitory pair of IF neurons with inhibitory self interactions, $\epsilon > 0$ and $W_{11} = W_{22} = 0$, $W_{21} = 1$, $W_{12} = -2$. The collective period of synchronized oscillations is taken to be $T = \ln 2$. Solid and dashed curves denote solutions of equation (4.10) for ϵ with $\lambda = i\beta$, real β . Crossing the solid boundary of the stability region from below signals destabilization of the synchronous state leading to the formation of a periodic bursting state.

Now let us consider an excitatory/inhibitory pair of IF neurons with $\epsilon > 0$, $W_{11} = W_{22} = 0$ and $W_{12} = -2$, $W_{21} = 1$ and zero axonal delays $\tau_a = 0$. The analog version of this network was studied in section 3.2 and shown to exhibit periodic variations in the mean firing rate in the strong coupling regime. It can be established from equation (4.9) that the synchronous state is stable for sufficiently weak coupling. In order to investigate instabilities in the strong coupling regime, we set $\lambda = i\beta$ in equation (4.10) and solve for (ϵ, β) as a function of α . For each α , the smallest solution $\epsilon = \epsilon_c$ determines the bifurcation point, which leads to a stability diagram of the form shown in Fig. 7. In contrast to the previous example, a critical coupling for an instability in the firing times

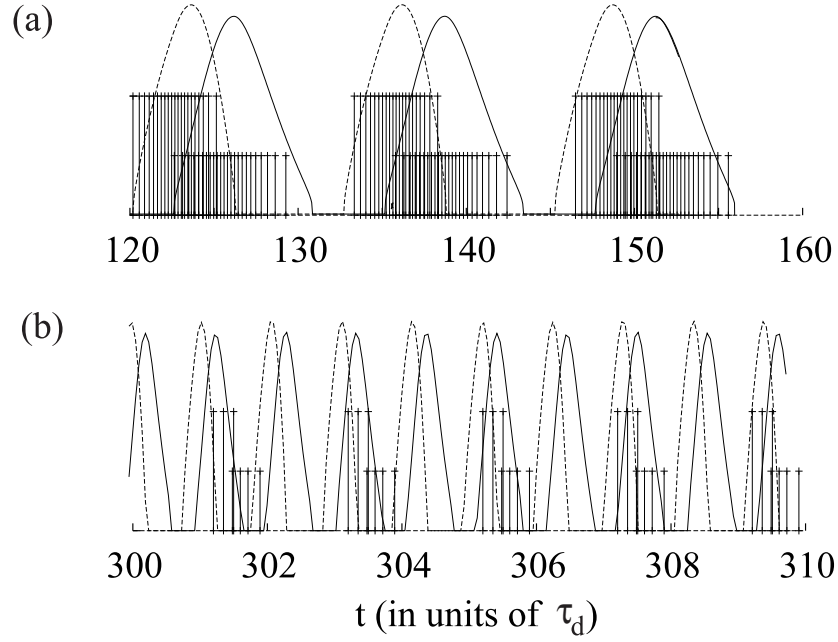


Figure 8: Spike train dynamics for a pair of IF neurons with both excitatory and inhibitory coupling corresponding to points A and B in Fig. 7 respectively. The firing times of the two oscillators are represented with lines of different heights (marked with a $+$). Smooth curves represent variation of firing rate in the analog version of the model.

exists for all α . Note that the left-hand (right-hand) branch in Fig. 7 corresponds to a Hopf (period doubling) bifurcation. Direct numerical solution of the system shows that beyond the bifurcation point on either branch the system jumps to a state in which the two neurons exhibit periodic bursting patterns (Fig. 8). This can be understood in terms of mode-locking associated with periodic variations of the inter-spike intervals on closed attracting orbits (see Fig. 9). Suppose that the k th oscillator has a periodic solution of length M_k so that $\Delta_k^{n+pM_k} = \Delta_k^n$ for all integers p . If $\Delta_k^1 \gg \Delta_k^n$ for all $n = 2, \dots, M_k$, say, then the resulting spike train exhibits bursting with the inter-burst interval equal to Δ_k^1 and the number of spikes per burst equal to M_k . Although both oscillators have different inter-burst intervals ($\Delta_1^1 \neq \Delta_2^1$) and numbers of spikes per burst ($M_1 \neq M_2$), their spike trains have the same total period, that is, $\sum_{n=1}^{M_1} \Delta_1^n = \sum_{n=1}^{M_2} \Delta_2^n$. Due to the periodicity of the activity, the ISIs only fall on a number of discrete points on the orbit, which is radically different from the case found in van Vreeswijk (1996) where the whole curve is visited due to the quasi-periodical nature of the firing. (Quasiperiodicity is also observed in the pattern formation example presented in section 4.5). The variation of the ISIs Δ_i^n with n is compared directly with the corresponding variation of the firing rates of the analog model in Fig. 8. Good agreement can be seen between the two models in the case of small α (fig. 8a) but discrepancies between the two arise as α increases (fig. 8b). As in the case of oscillator death the occurrence of bursting through a strong coupling instability in the firing times appears to be quite general. For example, suppose that we have a non-zero discrete delay τ_a such that the synchronous state is unstable and the anti-phase state is stable for a given α . We find that the latter state also destabilizes for sufficiently small α leading to a periodic bursting state.

Our analysis of a pair of excitatory/inhibitory IF neurons suggests that bursting can arise at a network level due to strong synaptic coupling without the need for additional slow ionic currents (see eg. Wang and Rinzel 1995). An alternative mechanism for generating bursts in networks of interacting neurons is based upon electrical (diffusive) coupling between cells. This has been studied in small networks of leaky-integrator neurons with post inhibitory rebound (Mulloney *et al* 1981) and in large networks of Hodgkin-Huxley neurons (Han *et al* 1995). Our analysis also shows that bursting can occur in the absence of the self-interaction terms considered in our previous work (Bressloff and Coombes 1998c); it is hard to justify the presence of such terms on neurophysiological grounds. (See section 4.6).

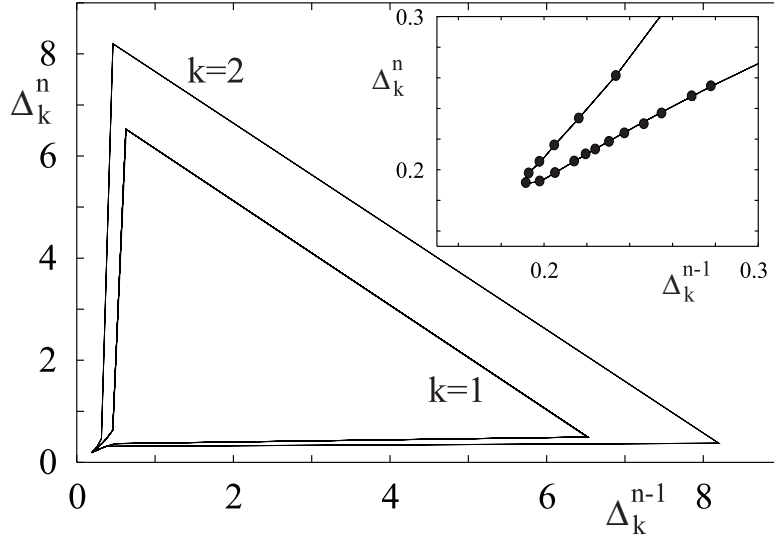


Figure 9: A plot of the inter-spike intervals $(\Delta_k^{n-1}, \Delta_k^n)$ of the spike trains shown in Fig. 8a illustrating how they lie on closed periodic orbits. Points on an orbit are connected by lines. Note that each triangular region is associated with only one of the neurons, highlighting the difference in inter-burst intervals (see also Fig. 8a). The inset is a blow up of orbit points for one of the neurons within a burst.

4.5 Pattern formation in a one-dimensional network

As our final example of strong-coupling instabilities in IF networks, we consider a ring of $N = 2M + 1$ neurons evolving according to equations (3.1) and (3.2) with $\epsilon > 0$, $\tau_a = 0$ and a weight matrix $W_{ij} = W(i - j)$ where

$$W(k) = A_1 \exp(-k^2/(2\sigma_1^2)) - A_2 \exp(-k^2/(2\sigma_2^2)), \quad 0 < k \leq M \quad (4.16)$$

$W(k) = 0$ for $|k| > M$ and $W(0) = 0$ (no self-interactions). We choose $A_1 > A_2$ and $\sigma_1 < \sigma_2$. $W(k)$ then represents a lattice version of a Mexican hat interaction function in which there is competition between short-range excitation and long-range inhibition. A continuum version of $W(k)$ is plotted in Fig. 10a for illustration. This type of architecture is well known to support spatial pattern formation in analog neural systems (Ermentrout and Cowan 1979; Ermentrout 1998). We shall show that similar behavior occurs in the IF model.

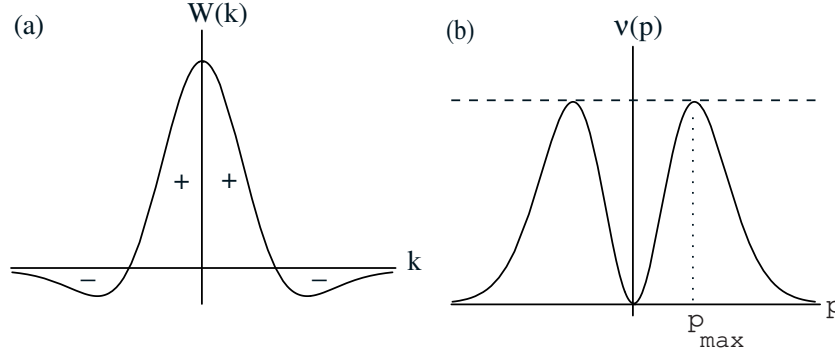


Figure 10: (a) Example of a Mexican hat function weight distribution $W(k)$ and (b) its eigenvalue distribution $\nu(p)$.

For the given weight matrix $\mathbf{W}$ and homogeneous external inputs $I_i = I$, $i = 1, \dots, N$, the network is translationally invariant. This means that one class of solution to the phase-locking equations (4.1) consists of “traveling waves” of the form $\phi_k = qk/N$ for integers $q = 0, \dots, N - 1$. This type of phase-locked solution also arises in studies of the spike response model (Kistler *et al* 1998) and in studies of weakly-coupled phase oscillators (Crook *et al* 1997; Bressloff and Coombes 1997). We shall concentrate on the synchronous solution $q = 0$. For convenience, we shall assume that there is an equal balance between excitation and inhibition by fixing A_1, A_2 in equation (4.16) so that $\Gamma_i \equiv \sum_{j=1}^N W_{ij} = \sum_{k=-M}^M W(k) = 0$ for all i . (This condition is not necessary, however, for pattern formation to occur). The collective period of synchronous oscillations is then

$T = \ln[I/(I - 1)]$ (see equation (4.7)). In order to investigate the linear stability of the synchronous state we need to determine the eigenvalues of the weight matrix $\mathbf{W}$. These are given by

$$\nu(p) = 2 \sum_{k=1}^M W(k) \cos(pk), \quad p = 0, \frac{2\pi}{N}, \dots, \frac{2\pi(N-1)}{N} \quad (4.17)$$

with $\nu(p) > \nu(0) = 0$ for all $p \neq 0$. The corresponding eigenvectors are $\delta_k = e^{ikp}$. Equation (4.9) then shows that the synchronous state is stable in the weak coupling regime, since $K'_T(0) < 0$ for all α (when $\tau_a = 0$) and $\hat{\nu}(p) = \nu(p)$. Let $\pm p_{max}$ be the wavenumbers at which $\nu(p)$ attains its maxima. (This is illustrated for the continuum Mexican hat function in Fig. 10b). Take $\delta_k = e^{ikp}$ and $\Gamma_i = 0$, and set $\lambda = i\beta$ in equation (4.10). Equating real and imaginary parts leads to the pair of equations

$$\begin{aligned} [\cos(\beta) - 1][I - 1] &= \hat{\epsilon}C(\beta) \\ \sin(\beta)[I - 1] &= -\hat{\epsilon}S(\beta) \end{aligned} \quad (4.18)$$

where $\hat{\epsilon} = \epsilon\nu_{max}$ and $\nu_{max} = \nu(p_{max})$. We find that there exist non-trivial solutions of equation (4.18) for all values of α (see Fig. 11). As in the previous example, the left-hand (right-hand) branch in Fig. 11 corresponds to a Hopf (period doubling) bifurcation. It follows that destabilization occurs due to activation of the eigenmodes $\delta_k = e^{\pm ip_{max}k}$. Since $p_{max} \neq 0$, the instability will involve spatially periodic perturbations of the firing times and this leads to the formation of regular activity patterns across the network as illustrated in Fig. 12.

When the network undergoes either a Hopf or period doubling bifurcation it leads to the creation of spatio-temporal fluctuations of the inter-spike intervals. Define the long-term average firing rate according to $a_k = \overline{\Delta}_k^{-1}$ where $\overline{\Delta}_k$ is defined in (4.11). It follows that spatial (k -dependent) variations in the firing rates a_k can occur if there is a corresponding spatial distribution of the orbits in phase-space. Fig. 12 shows that the orbits are indeed separated from each other in phase-space (although they remain small relative to the natural time-scales of the system). The resulting long-term average behavior of the system is characterized by spatially regular patterns of output activity as shown in the inset of Fig. 12. These patterns are found to be consistent with those observed in the corresponding analog version of the model presented in section 3.2, and such agreement holds over a wide range of values of α that includes both fast and slow synapses. However, the IF model has additional fine structure associated with the dynamics on the orbits of Fig. 12, which is not resolved by the analog model. This is illustrated in the insets of Fig. 13 where we plot temporal variations in the inverse ISI (or instantaneous firing rate) of a

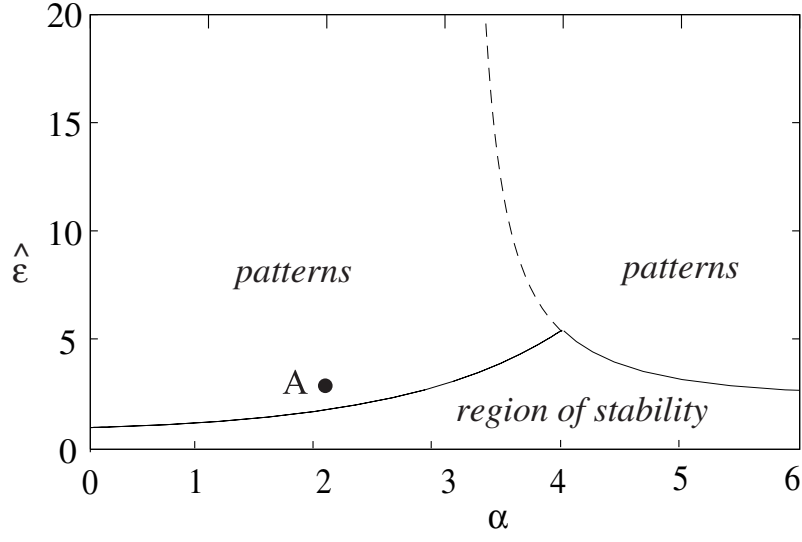


Figure 11: Region of stability for a ring of $N = 51$ IF neurons having the weight distribution $W(k)$ of equation (4.16) with $\sigma_1 = 2.1$, $\sigma_2 = 3.5$, $A_1 = 1.77$, and $\sum_k W(k) = 0$. The collective period of synchronized oscillations is taken to be $T = \ln 1.5$. Solid and dashed curves denote solutions of equation (4.18) for $\hat{\epsilon}$. Crossing the solid boundary of the stability region from below signals destabilization of the synchronous state leading to the formation of spatially periodic patterns of activity as shown in Fig. 12.

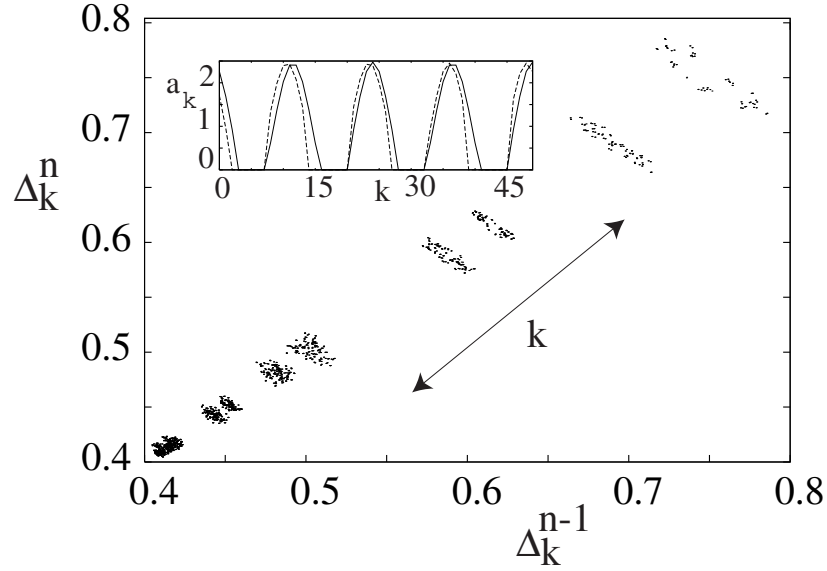


Figure 12: Separation of the inter spike interval orbits in phase-space for a ring of $N = 51$ IF corresponding to point A in Fig. 11 ($\alpha = 2$, $\epsilon = 0.4$). The attractor of the embedded inter-spike interval (ISI) with coordinates, $(\Delta_k^{n-1}, \Delta_k^n)$, is shown for all N neurons. Inset: Regular spatial variations in the long-term average firing rate a_k (dashed curve) are in good agreement with the corresponding activity pattern (solid curve) found in the analog version of the network constructed in section 3.2 with a_k now determined by the mean firing rate function (3.18).

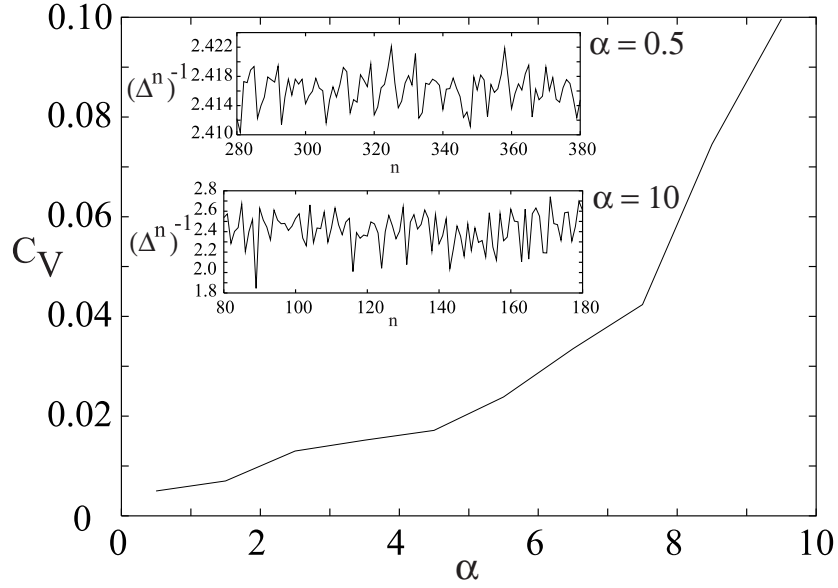


Figure 13: Plot of the coefficient of variation C_V for a single IF oscillator as a function of the inverse rise-time α . All other parameter values are as in Fig. 12. For each α , the oscillator is chosen to be one with the maximum mean firing rate. Insets: Time series showing variation of the inverse ISI $(\Delta^n)^{-1}$ with n for two particular values of α .

single oscillator for two different values of α . It can be seen that there are deterministic fluctuations in the mean firing rate. In order to characterize the size of these fluctuations we define a deterministic coefficient of variation $C_V(k)$ for a neuron k according to

$$C_V(k) = \frac{\sqrt{(\Delta_k - \bar{\Delta}_k)^2}}{\bar{\Delta}_k} \quad (4.19)$$

with averages defined by (4.12) for some sliding window of width P . The C_V for a single neuron is plotted as a function of α in Fig. 13. This shows that the relative size of the deterministic fluctuations in the mean firing rate is an increasing function of α . For slow synapses ($\alpha \rightarrow 0$), the C_V is very small indicating an excellent match between the IF and analog models. However, the fluctuations become more significant when the synapses are fast. For IF networks with a type of disordered mexican hat interaction, instantaneous synapses and stochastic external input it is also known that a further component to the C_V arises from the amplification of correlated fluctuations (Usher *et al* 1994). Interestingly Softy and Koch (1992) have shown that stochastic input alone cannot account for the high ISI variability exhibited by cortical neurons in awake monkeys.

One potential application of the above analysis is to the study of an integrate-and-fire model of orientation selectivity in simple cells of cat visual cortex. Such a model has been investigated numerically by Somers *et al* (1995), who consider a ring of integrate-and-fire neurons with k labeling the orientation preference $\theta = \pi k/N$ of a given neuron. The neurons interacted via synapses with spike-evoked conductance changes described by alpha functions and with a pattern of connectivity consisting of short-range excitation and long-range inhibition analogous to the Mexican hat function of Fig. 10. Numerical investigation showed how the recurrent interactions led to sharpening of orientation tuning curves. Note that the model of Somers *et al* (1995) also included shunting terms and time-dependent thresholds; it should be possible to extend the analysis of our paper to account for such features.

4.6 Bursting and oscillator death revisited

In section 3.2 we pointed out that in the case of a first-order analog model, an excitatory-inhibitory pair of neurons without self-interactions cannot undergo a Hopf bifurcation. This suggests that the bursting behaviour studied in section 4.4 might be sensitive to the rise-time of synaptic response even in the case of slow synaptic decay. In order to explore the distinct roles played by the rate of rise and fall of synaptic interactions, we generalize

the alpha function of equation (3.3) by considering the difference of exponentials

$$J(t) = \frac{\alpha_1 \alpha_2}{\alpha_2 - \alpha_1} (e^{-\alpha_1 t} - e^{-\alpha_2 t}) \Theta(t) \quad (4.20)$$

In the limit $\alpha_2 \rightarrow \alpha_1 \rightarrow \alpha$ this reduces to the alpha function (3.3). If $\alpha_1 > \alpha_2$ then the asymptotic behaviour of a synapse is approximately given by $e^{-\alpha_2 t}$, and the time to peak is $t_p = [\alpha_1 - \alpha_2]^{-1} \ln(\alpha_1/\alpha_2)$. The roles of α_1 and α_2 are reversed if $\alpha_2 > \alpha_1$.

In figure 14a, we plot the critical coupling for a discrete bifurcation in the firing times for the excitatory/inhibitory pair previously analyzed in section 4.4. Now, however, the delay distribution $J(t)$ is taken to be given by equation (4.20) with $\alpha_2 = 0.2$ and α_1 a free parameter. Since the synaptic decay-time is relatively slow, we expect there to be a good match between the IF and analog models. This is indeed found to be the case as illustrated in figure 14a, which shows that the critical coupling for bursting in the analog and IF models are in very close agreement. More surprisingly, it is seen that bursting persists even for large values of α_1 , that is, for fast synaptic rise-times. (Bursting still occurs even when α_1 is of the order 100 or more). One might still expect the frequency of the oscillations to approach zero in the limit $\alpha_1 \rightarrow \infty$. However, this is also not found to be the case, which can be understood from the fact that the bifurcations are subcritical (cf. figure 4b). Finally, in figure 14b we plot the critical coupling for oscillator death in an inhibitory pair of IF neurons. There is only a weak dependence on α_1 which is consistent with the analog model.

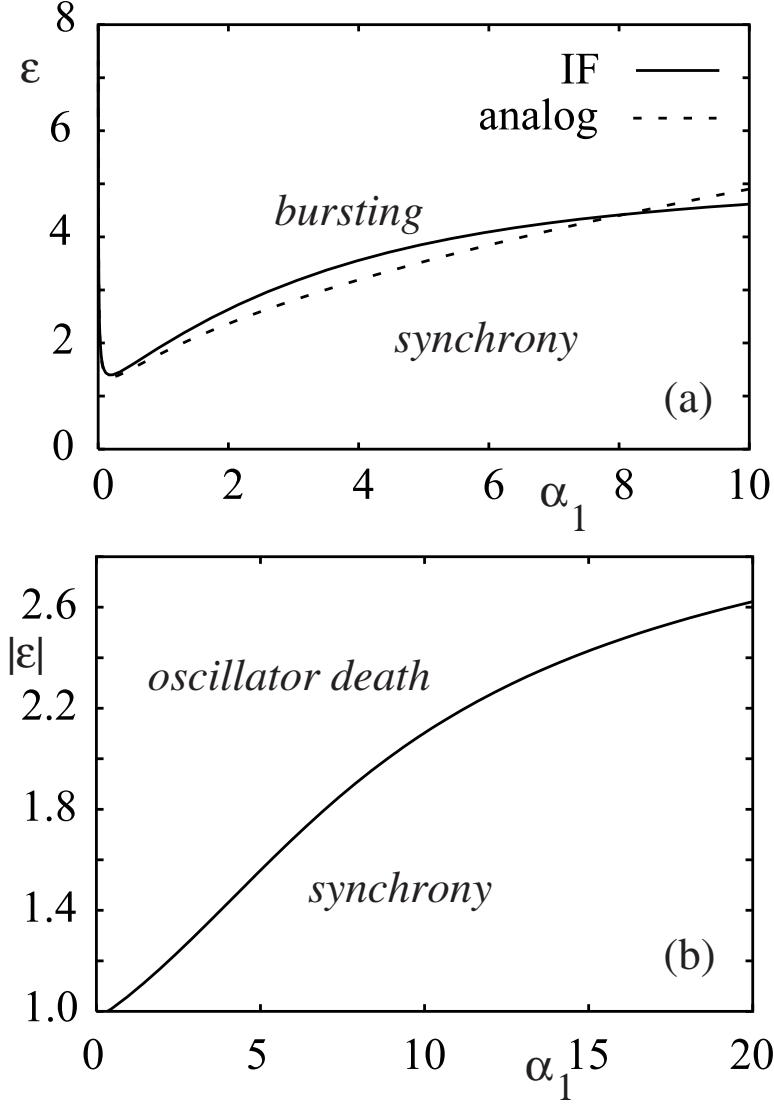


Figure 14: Critical coupling for a bifurcation in the firing times as a function of the rise-time α_1 for fixed decay-time $\alpha_2 = 0.2$. (a) Excitatory/inhibitory pair with $\epsilon > 0$, $W_{11} = W_{22} = 0$, $W_{21} = 1$ and $W_{12} = -2$. Bursting can occur even for fast rise-times. The corresponding critical coupling for the analog model is shown as a dashed curve. (b) Inhibitory pair of IF neurons with $\epsilon < 0$, $W_{11} = W_{22} = 0$, $W_{21} = W_{12} = 1$. Critical coupling is only weakly dependent on α_1 .

5 Discussion

We have presented a dynamical theory of spiking neurons that bridges the gap between weakly-coupled phase oscillator models and strongly coupled firing rate (analog) models. The basic results of our paper can be summarized as follows:

1. A fundamental mechanism for the desynchronization of integrate-and-fire (IF) neurons with strong synaptic coupling is either a discrete Hopf or period doubling bifurcation in the firing times. This typically leads to non-phase-locked behavior characterized by spatio-temporal variations of the inter-spike intervals (ISIs). In the case of slow synapses, the coarse grained dynamics can be represented very well by a corresponding analog model in which the output of a neuron is taken to be a mean firing rate.
2. A homogeneous network of N synchronized IF neurons with global inhibitory coupling can destabilize in the strong coupling regime to a state in which some of the neurons became inactive (oscillator death). Thus the stability criterion obtained by van Vreeswijk *et al* (1994) for $N = 2$ is only valid in the weak coupling regime. There exists a critical value of the inverse rise-time, $\alpha_0(N)$, such that synchrony persists for arbitrarily large coupling when $\alpha > \alpha_0(N)$ (fast synapses). Moreover, $\alpha_0(N) \rightarrow 0$ as $N \rightarrow \infty$. This establishes that the stability condition specified in the mode-locking theorem of Gerstner *et al* (1996) is valid in the thermodynamic limit, but no longer holds for finite networks with slow synapses.
3. Rhythmic bursting patterns can occur in asymmetric IF networks with a mixture of inhibitory and excitatory synaptic coupling. The ISI's evolve on periodic orbits that are large relative to the mean ISI within a burst. There is good agreement between the temporal variation of the ISIs in the IF model and the variation of the firing rate in the corresponding analog model.
4. A network of IF neurons with long-range interactions can desynchronize to a state with a regular spatial variation in the mean firing rate that is in good agreement with the corresponding analog model. The ISIs evolve on orbits that are well separated in phase-space. The fine temporal structure of the IF model leads to deterministic fluctuations of the activity patterns whose coefficient of variation is an increasing function of the inverse rise-time α . In other words, fast synapses lead to higher levels of deterministic noise.

An important question that we hope to address elsewhere concerns the extent to which the complex behavior exhibited by the IF networks studied in this paper is mirrored by

more biophysically detailed models of spiking neurons. Preliminary numerical studies of Hodgkin-Huxley neurons suggests that there is a strong connection between the two classes of model. (See also White *et al* 1998). The advantage of working with the IF model is that it allows precise analytical statements to be made. Moreover, there are a number of ways of extending our analysis to take into account additional aspects of neuronal processing:

1. The effects of diffusion along the dendritic tree of a neuron can be incorporated into the model by taking $J(\tau)$ in (3.2) to be the Green's function of the corresponding cable equation. It is also possible to take into account active membrane properties under the assumption that variations of the dendritic membrane potential are small so that the channel kinetics can be linearized along the lines developed by Koch (1984). The resulting membrane impedance of the dendrites displays resonant-like behavior due to the additional presence of inductances. This leads to a corresponding form of resonant-like synchronization. In other words, there is a strongly enhanced (reduced) tendency to synchronize for excitatory (inhibitory) coupling when the resonant frequency of the dendritic membrane approximately matches the frequency of the oscillators. Active dendrites can also desynchronize homogeneous networks of IF oscillators with strong excitatory or inhibitory coupling leading to periodic bursting patterns (Bressloff 1998).
2. The response of a network to a sinusoidal external stimulus may be studied by taking $I_i = A + B \sin(\omega t)$ in equation (3.1) where A, B are constants. Since the resulting dynamical system is now non-autonomous, it is no longer possible to specify phase-locking in terms of $N - 1$ relative phases and a self-consistent collective period (see equation (4.1)). However, one can derive conditions under which the network is entrained to the external stimulus. For example, in the case of 1 : 1 mode-locking the firing times of the IF neurons are of the form $T_j^m = (m - \phi_j)T$ with $T = 2\pi/\omega$. The absolute phases ϕ_j are determined from the set of equations

$$1 = (1 - e^{-T})A + (1 - e^{-T})F(\phi_i) + \epsilon \sum_{j=1}^N W_{ij} K_T(\phi_j - \phi_i) \quad (5.1)$$

with K_T given by equation (4.2) and $F(\phi) = B[\sin(2\pi\phi) + \omega \cos(2\pi\phi)]/(1 + \omega^2)$. It is also possible to investigate the stability of such solutions by a relatively straightforward generalization of the analysis presented in section 4.2. Another interesting extension is to $p : q$ mode-locking. For example, suppose that the neurons have T -periodic firing patterns in which the j th neuron fires q_j times over an interval T .

In order to generate such solutions it is necessary to take the firing times to have the general form (Coombes *et al* 1998)

$$T_j^n = T \left(\left[\frac{n}{q_j} \right] - \phi_{j,n \bmod q_j} \right) \quad (5.2)$$

where $[\cdot]$ denotes the integer part. This generates a set of $\sum_{j=1}^N q_j$ closed equations for the absolute phases $\phi_{j,n \bmod q_j}$. One can use these equations to determine the borders in parameter space where the ansatz (5.2) for mode-locking fails. The set of such borders will define an Arnold tongue diagram with overlapping tongues indicating possible regions of multistability and chaos. Similar techniques can be used to study the bursting solutions found in section 4.4. The existence of chaotic solutions can be studied using an extension of the notion of a Liapunov exponent that takes into account the presence of discontinuities in the dynamics due to reset (Coombes *et al* 1998). Incidentally, the construction of a Liapunov exponent also allows one to understand the spike time reliability of an IF neuron in response to small aperiodic signals as recently observed by Hunter *et al* (1998).

3. Another important issue concerns the effects of noise. We expect that sufficiently small levels of noise will not alter the basic results of this paper. On the other hand, the presence of noise can lead to new and interesting phenomena as illustrated by the numerical study of pattern formation by Usher *et al* (1994,1995). They considered a two-dimensional network of IF neurons with short-range excitation and long-range inhibition, fast synapses and a stochastic external input. They observed patterns of activity in the mean firing rate that are two-dimensional versions of the patterns shown in the inset of Fig. 12. It was found that in a certain parameter regime these patterns were metastable in the presence of noise and tended to diffuse through the network. This macroscopic dynamics resulted in $1/f$ power spectra and power-law distributions of the ISI's on the microscopic scale of a single neuron, and led to a large coefficient of variation, $C_V > 1$. We are currently carrying out a detailed study of pattern formation in two-dimensional IF networks using the methods presented in our paper, and hope to gain further insight into the observations of Usher *et al* (1994,1995), in particular, the interplay between noise and the underlying deterministic dynamics. One way of including noise into the IF model or the spike response model is by introducing a probability P of firing during an infinitesimal time δt : $P(U; \delta t) = \tau^{-1}(U)\delta t$. To mimic more realistic models the response time $\tau(U)$ is chosen to be large if $U < h$ and to vanish if $U \gg h$. This is achieved by writing $\tau(U) = \tau_0 e^{-\beta(U-h)}$ where τ_0 is the response time at threshold and β determines the level of noise. The deterministic case is recovered

in the limit $\beta \rightarrow \infty$. In the case of large homogeneous networks one can use a mean-field approach to reduce the dynamics to an analytically tractable form (see Gerstner 1995). Note that another consequence of noise is to smooth out the firing rate function (3.18) in the analog version of the model.

4. A final aspect we would like to highlight here is the distinction between excitable and oscillatory networks. In this paper we have focussed on the latter case by taking $I_i > 1$ in equation (3.1) so that the network may be viewed as a coupled system of oscillators with natural periods $T_i = \ln[I_i/(I_i - 1)]$. However, it is also possible for spontaneous network oscillations to occur in the excitable regime whereby $I_i < 1$ for all $i = 1, \dots, N$. All of the basic analytical results presented in section 4 can be carried over to the excitable regime, in particular, the phase-locking equation (4.1) and the eigenvalue equation (4.5). On the other hand, the weak coupling theory of section 3.1 is no longer applicable since one requires a finite level of coupling to maintain oscillatory behaviour. There have also been a number of studies of waves in excitable spiking networks in both one dimension (Ermentrout and Rinzel 1981; Ermentrout 1998) and two dimensions (Chu *et al* 1994; Kistler *et al* 1998). We are currently carrying out a detailed comparison of wave phenomena in excitable and oscillatory IF networks using some of the ideas presented in this paper.

Acknowledgements

We would like to thank Prof. Jack Cowan (University of Chicago) for helpful discussions during the completion of this work. We are also grateful for the constructive comments of the referees, and the suggestion to include the example of section 4.6. The research was supported by grant number GR/K86220 from the EPSRC (UK).

References

- L F Abbott (1991). Realistic synaptic inputs for model neural networks. *Network* 2:245–258.
- L F Abbott (1994). Decoding neuronal firing and modeling neural networks. *Quart. Rev. Biophys.* 27:291–331.
- L F Abbott and T B Kepler (1990). Model neurons: from Hodgkin–Huxley to Hopfield. In *Statistical Mechanics of Neural Networks*, Luis Garrido (editor), Lecture notes in Physics

368, pp. 5–18. Springer-Verlag.

L F Abbott and C van Vreeswijk (1993). Asynchronous states in neural networks of pulse-coupled oscillators. *Phys. Rev. E.*, 48:1483–1490.

D J Amit and M V Tsodyks (1991). Quantitative study of attractor neural networks retrieving at low spike rates I: Substrate- spikes, rates and neuronal gain. *Network*, 2:259–274.

A Atiya and P Baldi (1989). Oscillations and synchronization in neural networks: an exploration of the labeling hypothesis. *Int. J. Neural Syst.*, 1:103–124.

M J Berry, D K Warland, and M Meister (1997). The structure and precision of retinal spike trains. *Proc. Natl. Acad. Sci. USA*, 94:5411–5416.

P C Bressloff (1998). Resonant-like synchronization and bursting in a model of pulse-coupled neurons with active dendrites. *J. Comp. Neurosci.* (*in press*).

P C Bressloff and S Coombes (1997). Physics of the extended neuron. *Int. J. Mod. Phys.* 11:2343–2392.

P C Bressloff, S Coombes, and B De Souza (1997). Dynamics of a ring of pulse-coupled oscillators: a group theoretic approach. *Phys. Rev. Lett.*, 79:2791–2794.

P C Bressloff and S Coombes (1998a). Symmetry and phase-locking in a ring of pulse-coupled oscillators with distributed delays. *Physica D* (*in press*).

P C Bressloff and S Coombes (1998b). Travelling waves in chains of pulse-coupled oscillators. *Phys. Rev. Lett.*, 80:4185–4188.

P C Bressloff and S Coombes (1998c). Desynchronization, mode-locking and bursting in strongly coupled IF oscillators. *Phys. Rev. Lett.*, 81: 2168–2171.

C E Carr and M Konishi (1990). A circuit for detection of interaural differences in the brain stem of the barn owl. *J. Neurosci.*, 10:3227–3246.

C C Chow (1998). Phase-locking in weakly heterogeneous neuronal networks *Physica D*, 118:343–370.

P H Chu, J G Milton and J D Cowan (1994) Connectivity and the dynamics of integrate-and-fire neural networks. *Int. J. Bif. Chaos*, 4:237–243.

S Coombes and G J Lord (1997). Desynchronisation of pulse-coupled integrate-and-fire neurons. *Phys. Rev. E* 55:2104–2107.

- S Coombes and P C Bressloff (1998). Mode-locking and Arnold tongues in periodically forced integrate-and-fire oscillators. Preprint (1998).
- S M Crook, G B Ermentrout, M C Vanier and J M Bower (1997). The role of axonal delay in the synchronization of networks of coupled cortical oscillators. *J. Comp. Neurosci.* 4:161–172.
- A Destexhe, Z F Mainen, and T J Sejnowski (1994). Synthesis of models for excitable membranes synaptic transmission and neuromodulation using a common kinetic formalism. *J. Comp. Neurosci.*, 1:195–231.
- G B Ermentrout (1985). The behavior of rings of coupled oscillators. *J. Mathemat. Biol.*, 23:55–74.
- G B Ermentrout (1998). Neural networks as spatial pattern forming systems. *Rep. Prog. Phys.*, 61:353–430.
- G B Ermentrout (1998). The analysis of synaptically generated traveling waves. *J. Comp. Neurosci.*, 5:191–208.
- G B Ermentrout and J D Cowan (1979). A mathematical theory of visual hallucination patterns. *Biol. Cybern.*, 34:137–150.
- G B Ermentrout and J Rinzel (1981). Waves in a simple excitable or oscillatory, reaction-diffusion model. *J. Math. Biol.*, 11:1269–294.
- G B Ermentrout and N Kopell (1984). Frequency plateaus in a chain of weakly coupled oscillators. *SIAM J. Math. Anal.*, 15:215–237.
- U Ernst, K Pawelzik, and T Giesel (1995). Synchronization induced by temporal delays in pulse-coupled oscillators. *Phys. Rev. Lett.*, 74(9):1570–1573.
- W Gerstner (1995). Time structure of the activity in neural-network models. *Phys. Rev. E*, 51(1):738–758.
- W Gerstner, R Ritz and J L van Hemmen (1993). A biologically motivated and analytically soluble model of collective oscillations in the cortex I: Theory of weak locking. *Biol. Cybern.*, 68:363–374.
- W Gerstner and J L van Hemmen (1994). Coding and information processing in neural networks. In *Models of Neural Networks II*, E Domany, J L van Hemmen, and K Schulten (editors) pp. 1–93. Springer-Verlag.

- W Gerstner, J L van Hemmen, and J D Cowan (1996). What matters in neuronal locking. *Neural Comput.*, 94:1653–1676.
- W Gerstner, A K Kreiter, H Markram, and A V M Herz (1997). Neural codes: Firing rates and beyond. *Proc. Natl. Acad. Sci. USA*, 94:12740–12741.
- D Golomb and J Rinzel (1994). Clustering in globally coupled inhibitory neurons. *Physica D*, 72: 259–282.
- S K Han, C Kurrer, and Y Kuramoto (1995). Dephasing and bursting in coupled neural oscillators. *Phys. Rev. Lett.*, 75:3190–3193.
- D Hansel, G Mato, and C Meunier (1995). Synchrony in excitatory neural networks. *Neural Comput.*, 7:307–337.
- J J Hopfield (1984). Neurons with graded response have computational properties like those of two-state neurons. *Proc. Natl. Acad. Sci. U.S.A.*, 81:3088–3092.
- J J Hopfield (1995). Pattern recognition computation using action potential timing for stimulus representation. *Nature*, 376:33–36.
- J D Hunter, J G Milton, P J Thomas and J D Cowan (1998). A resonance effect for neural spike time reliability *J. Neurophysiol. (in press)*.
- J P Keener, F C Hoppensteadt, and J Rinzel (1981). Integrate-and-fire models of nerve membrane response to oscillatory input. *SIAM J. Appl. Math.*, 41(3):503–517.
- T B Kepler, L F Abbott, and E Marder (1992). Reduction of conductance-based neuron models. *Biological Cybernetics*, 66:381–387.
- W M Kistler, W Gerstner, and J L van Hemmen (1997). Reduction of the Hodgkin-Huxley equations to a single-variable threshold model. *Neural Comput.*, 9:1015–1045.
- W M Kistler, R Seitz, and J L van Hemmen (1998). Modeling collective excitations in cortical tissue. *Physica D*, 114:273–295.
- C Koch (1984). Cable theory in neurons with active, linearized membranes. *Biol. Cybern.*, 50:15–33.
- Y Kuramoto (1984). *Chemical Oscillations, Waves and Turbulence*. Springer-Verlag, Berlin.
- Z Li and J J Hopfield (1989). Modeling the olfactory bulb and its neural oscillatory processings. *Biol. Cybern.*, 61:379–392.

- Z Mainen and T J Sejnowski (1995). Reliability of spike timing in neocortical neurons. *Science*, 268:1503–1506.
- C M Marcus and R M Westervelt (1989). Stability of analog neural networks with delay. *Phys. Rev. A* 39:347–365.
- R E Mirollo and S H Strogatz (1990). Synchronisation of pulse-coupled biological oscillators. *SIAM J. Appl. Maths*, 50:1645–1662.
- B Mulloney, D H Perkel and R W Budelli (1981). Motor-pattern production: interaction of chemical and electrical synapses. *Brain Research*, 229:25–33.
- F Rieke, D Warland, R R D van Steveninck, and W Bialek (1996). *Spikes: Exploring the Neural Code*. MIT Press, Cambridge.
- W R Softky and C Koch (1992). Cortical cells should fire regularly, but do not. *Neural Computation*, 4:643–645.
- D C Somers, S B Nelson and M Sur (1996). An emergent model of orientation selectivity in cat visual cortical simple cells. *J. Neurosci.*, 15:5448–5465.
- S P Strong, R Koberle, R R D van Steveninck, and W Bialek (1998). Entropy and information in neural spike trains. *Phys. Rev. Lett.*, 80:197–200.
- A Treves (1993). Mean-field analysis of neuronal spike dynamics. *Network*, 4:259–284.
- M Tsodyks, I Mitkov, and H Sompolinsky (1993). Pattern of synchrony in inhomogeneous networks of oscillators with pulse interactions. *Phys. Rev. Lett.*, 71:1280–1283.
- H C Tuckwell (1988). *Introduction to Theoretical Neurobiology*, volume I. Cambridge University Press.
- M Usher, M Stemmler, C Koch, and Z Olami (1994). Network amplification of local fluctuations causes high spike rate variability, fractal firing patterns and oscillatory local field potentials. *Neural Comput.*, 5:795–835.
- M Usher, M Stemmler, and Z Olami (1995). Dynamic pattern formation leads to $1/f$ noise in neural populations. *Phys. Rev. Lett.*, 74:326–329.
- C van Vreeswijk, L F Abbott, and G B Ermentrout (1994). When inhibition not excitation synchronizes neural firing. *J. Comp. Neurosci.*, 1:313–321.
- C van Vreeswijk (1996). Partial synchronization in populations of pulse-coupled oscillators. *Phys. Rev. E*, 54(5):5522–5537.

X-J Wang and J Rinzel (1992). Alternating and synchronous rhythms in reciprocally inhibitory model neurons. *Neural Comput.*, 4: 89–97.

X-J Wang and J Rinzel (1995). Oscillatory and bursting properties of neurons. In *Handbook of Brain Theory and Neural Networks*, M. Arbib (editor), pp. 686–691, MIT Press.

J A White, C C Chow, J Ritt, C Soto-Trevino, and N Kopell (1998). Synchronization and oscillatory dynamics in heterogeneous, mutually inhibited neurons. *J. Comput. Neurosci.*, 5:5–16.

H R Wilson and J D Cowan (1972). Excitatory and inhibitory interactions in localized populations of model neurons. *J. Biophys.*, 12:1–24.

H R Wilson and J D Cowan (1973). A mathematical theory of the functional dynamics of cortical and thalamic nervous tissue. *Kybernetik*, 13:55–80.